

SENCO®

Performance. Power.
Productivity.™

FramePro® 601

3 1/2" Clipped Head 34° Framing/Sheathing Nailer

This clipped head nailer provides all the important features you want at an affordable price. Its compact design makes it easy to handle, and easy on the arm. The 34° short, in-line magazines provide excellent maneuverability and line of sight. A powerful framer that drives a wide range of fasteners in three gauges (.120, .113, .131) from 2" to 3 1/2" to handle virtually any job.



Applications


Framing, sheathing, truss building, sub-flooring and decks. Other applications include crate and box assembly, pallet making, furniture frame assembly and fencing.

Features and Benefits

- Selectable trigger actuation
- Sawtooth safety that digs in for precision toenailing
- Shorter, straight-line 34° magazine for better line of sight and superior maneuverability
- Reliable internal design with full round driver
- Tool-free adjustable exhaust
- Well-balance and powerful
- Tool-free adjustable depth-of-drive control
- Soft comfort grip handle reduces fatigue

Specifications

Item#	1G0101N
Selectable actuation trigger	
Reg. Operating Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.)	10 scfm
Air Inlet	3/8" NPT
Tool Weight	8 lbs (3.62 kg)
Height	13.5" (343mm)
Length	15.13" (384mm)
Width	4.17" (106mm)
Fastener Capacity	70

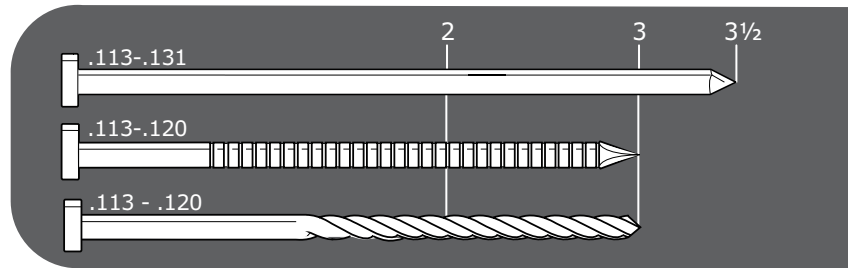

Fastener Specifications

Shank Diameter	.113", .120", .131"
Fastener Range	2" - 3 1/2"
Finish	Bright Basic, Galv. & Stainless
Collation	34° angled taped strip

*Choose the right actuation mode!

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596, or visit our web site at: www.senco.com.

Features



Smooth-Shank

Length	Item Code	Carton Count	Finish
2 x .113	M002080	2.5M	Bright
2 x .113	GC21APBK	2.5M	Bright
2¼ x .113	GC23APBX	2.5M	Bright
2¼ x .113	GC23AHAK	1.0M	Bt. Hardened
2½ x .113	GC24APBX	2.5M	Bright
2½ x .113	GC25APBX	2.5M	Bright
2¾ x .120	HC26APBK	3.0M	Bright
3 x .120	HC27APB	3.0M	Bright
3 x .120	HC27APBX	2.5M	Bright
3 x .131	KC27APBX	2.5M	Bright
3¼ x .120	HC28APBX	2.5M	Bright
3¼ x .131	KC28APBX	2.5M	Bright
3½ x .131	KC29APBX	2.5M	Bright
2 x .113	GC21AABK	2.5M	Galv
2¾ x .113	GC24ASBK	2.0M	Hot Dip
2½ x .113	GC25AABKN	5.0M	Galv
2½ x .131	KC25AAB	5.0M	Galv
3 x .120	HC27AABX	2.5M	Galv
3 x .131	KC27EDB	1.0M	WeatherX™2
3 x .131	KC27ASBX	2.5M	Hot Dip
3¼ x .131	KC28ASBX	2.5M	Hot Dip
3¼ x .131	KC28AABX	2.5M	Galv
3½ x .131	KC29ASBX	2.5M	Hot Dip
3½ x .131	KC29AABX	2.5M	Galv
3 x .131	KC27AGBK	1.0M	Stainless
3¼ x .131	KC28AGB	1.0M	Stainless

Screw-Shank-Strip

Length	Item Code	Carton Count	Finish
3 x .120	HF27EPAK	3.1M	Bright
3 x .120	HF27ESBK	2.0M	Hot-Dip
3 x .120	HF27EDB	1.0M	WeatherX™2
3 x .120	HF27AGBK	1.0M	Stainless

Ring-Shank

Length	Item Code	Carton Count	Finish
2 x .113	GE21APAK	2.0M	Brigh
2 x .113	M002080	2.5M	Bright
2¾ x .113	GE24APBX	2.5M	Bright
2 x .113	GE21AAAK	2.0M	Galv
2 x .113	GE21ASBK	2.0M	Hot Dip
2¾ x .113	GE24AAAK	1.5M	Galv
2¾ x .113	GE24AABX	2.5M	Galv
2¾ x .113	GE24ASBX	2.5M	Hot Dip
3 x .120	HE27AABX	2.5M	Galv
3 x .120	HE27ASBX	2.5M	Hot Dip
2¾ x .113	GE24AGBK	1.0M	Stainless
3 x .120	HE27AGBK	1.0M	Stainless

SENCO® RoundStrip™ 34° Smooth Round Head Nails

Length	Item Code	Carton Count	Finish
2 ¾ x .113	G524APBX	2.5M	Bright
3 x .120	H527APBX	2.5M	Bright
3 x .131	K527APBX	2.5M	Bright
3¼ x .131	K528APBX	2.5M	Bright
3½ x .131	K529APBX	2.5M	Bright
2 x .113	G521ASBK	2.0M	Hot Dip
2 ¾ x .113	G524ASBX	2.5M	Hot Dip
3 x .120	H527ASBX	2.5M	Hot Dip
3 x .131	K527ASBX	2.5M	Hot Dip
3¼ x .131	K528ASBX	2.5M	Hot Dip

SENCO® RoundStrip™ 34° Ring Round Head Nails

Length	Item Code	Carton Count	Finish
2 ¾ x .113	G624APBX	2.5M	Bright
3 x .120	H627APBX	2.5M	Bright
2 x .113	G621ASBK	2.0M	Hot Dip
2 ¾ x .113	G624ASBX	2.5M	Hot Dip
3 x .120	H627ASBX	2.5M	Hot Dip
3 x .131	K627ASBX	2.5M	Hot Dip