


Intermediate Stapler L Series

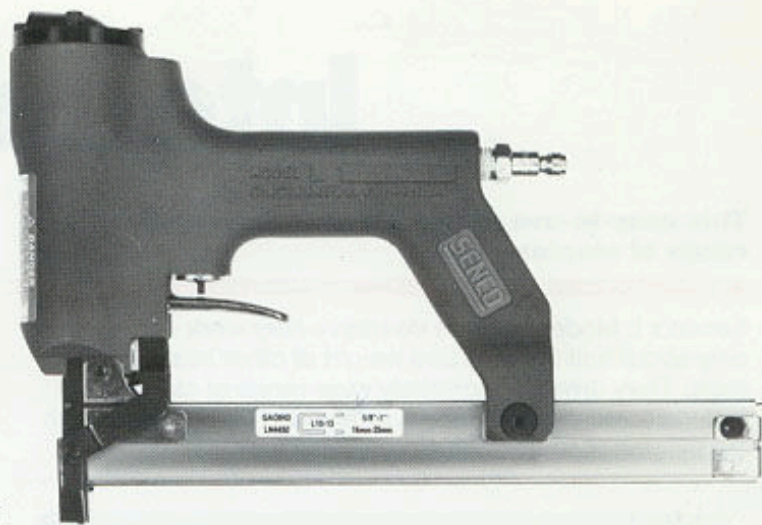

Tool Specifications:

Tool Weight: 3.3 to 3.5 lbs.
 Height: 7 $\frac{3}{4}$ "
 Length: 11 $\frac{1}{16}$ " to 14 $\frac{13}{16}$ "
 Lip Length: $\frac{1}{2}$ " to $\frac{3}{4}$ "
 Nail Capacity: 140-240, depending upon lengths and gauges
 E-Z Clear feature
 Available in bottom fire/trigger fire and trigger fire*
 Reg. Pressure: 80-110 p.s.i.g.

Look on magazine track for hand-engraved marking (or the sticker) for specific model

Fastener Specifications:

G Series **LG45**

Crown: $\frac{3}{16}$ " (9.5mm) Width: .045" (1.1mm)
 Thickness: .023" (.59mm)

M Series **LG4450**

Crown: $\frac{3}{16}$ " (9.5mm) Width: .050" (1.3mm)
 Thickness: .044" (1.1mm) Gauge: 18

Lengths	Inches	$\frac{1}{4}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	$\frac{1}{2}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	1"
	Millimeters	6	10	13	16	10	13	16	19	22	25
Part No.		G04BAA	G06BAA	G08BAA	G10BAA	M06BAB	M08BAB	M10BAB	M11BAB	M12BAB	M13BAB

W Series **LN2532**

Crown: $\frac{3}{16}$ " (4.8mm)
 Width: .032" (.82mm)
 Thickness: .025" (.64mm)

L Series **LN4450**

Crown: $\frac{1}{4}$ " (6.4mm) Width: .050" (1.3mm)
 Thickness: .044" (1.1mm) Gauge: 18

Lengths	Inches	$\frac{5}{16}$ "	$\frac{3}{4}$ "	$\frac{3}{8}$ "	$\frac{7}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	1"
	Millimeters	16	19	10	11	13	16	19	22	25
Part No.		W10BAB	W11BAB	L06BAB	L07BAB	L08BAB	L10BAB	L11BAB	L12BAB	L13BAB

Available by contract

* Trigger fire tools are used when precise placement of fasteners is critical. Place safety against the work and activate the trigger. Bottom fire/trigger fire tools are used when higher speed fastener placement is desired. The tool is operated when the safety or trigger is first actuated, followed by actuation of the other.

NOTE: All part numbers shown are for galvanized carbon steel staples with chisel point. Other types of metal, points, and finishes are available... Sencote® or plain.

K Series

Crown: $\frac{1}{4}$ " (6.4mm) Width: .045" (1.1mm)
 Thickness: .030" (.77mm)

LN3045

Lengths	Inches	$\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{3}{4}$ "	$\frac{7}{8}$ "	1"
	Millimeters	10	13	16	19	22	25
Part No.		K06BAB	K08BAB	K10BAB	K11BAB	K12BAB	K13BAB

For additional information on how Senco fastening systems will save you time, reduce costs, and increase quality, call your nearest

Authorized Senco Dealer or Distributor listed in the Yellow Pages under "Staples," or call our toll-free Action Line: 1-800-543-4596.

SENCO®

FASTENING SYSTEMS

Safety First. The only way to work.®



©1993 by Senco Products, Inc. Order MK304 (5BP293) Litho in U.S.A.