

Roofing Nailer SCN200R




Tool Specifications:

Tool Weight: 5.7 lbs.
 Height: 10"
 Length: 11 1/8"
 Width: Main Body 3 1/8"
 Canister 4 1/2"
 Staple Capacity: 120
 Mode of Operation: Available with either "Restrictive Trigger" or "Dual Action" activating mechanism*
 Max. Operating Pressure: 120 p.s.i.g.
 Tool Order No. 360001N

Fastener Specifications:

The SCN200R drives five different smooth-shank, full round-head galvanized roofing nails— from 7/8" to 1 3/4".

Lengths	Inches	7/8"	1"	1 1/4"	1 1/2"	1 3/4"
	Millimeters	22	25	32	38	45
Shank Diameter	.120"	.120"	.120"	.120"	.120"	
Part No.	HJ12ATAV	HJ13ATAV	HJ15ATAV	HJ17ATAV	HJ19ATAV	
Nails/Cartron	3,200	3,200	3,200	3,200	3,200	
Coils/Cartron	27	27	27	27	27	

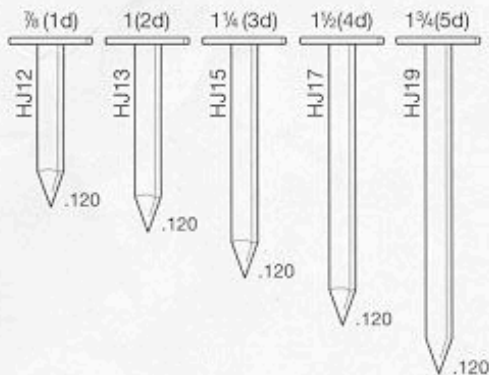

* "Restrictive Trigger" activated tools are used for applications where precision nail or staple placement is desired. You must first depress the safety element where you want to drive a nail or staple and then pull the trigger. After each nail or staple is driven, completely release the trigger and lift the tool off the work surface.

"Dual Action" activated tools are used for applications where high-production work is desired. There are two modes of operation:

Bottom Fire Method: This method of operation is sometimes called bounce firing. You must keep the trigger pulled while moving the tool along the work surface with a bounce motion, depressing the safety element where you want to drive a nail or staple.

Trigger Fire Method: First depress the safety element where you want to drive a nail or staple and then pull the trigger.

For instructions on safe use of tools with either of these activating mechanisms, please refer to the Operating Instructions or Customer Satisfaction and Safety Reminder contained in your tool carton.

For additional information on how Senco fastening systems will save you time, reduce costs, and increase quality, call your nearest

Authorized Senco Dealer or Distributor listed in the Yellow Pages under "Staples," or call our toll-free Action Line: 1-800-543-4596.

SENCO
FASTENING SYSTEMS