

# SJS PowerPlus<sup>®</sup>

## Medium-Duty Stapler



### Tool Specifications:

Tool Weight (Empty): 2 lbs.  
 Height: 5<sup>15</sup>/<sub>16</sub>"  
 Length: 9<sup>7</sup>/<sub>16</sub>"  
 Lip Length: 1<sup>1</sup>/<sub>16</sub>"  
 Tool Width: 1<sup>15</sup>/<sub>16</sub>"  
 Fastener Capacity: 110-185 depending on tool model  
 Recommended Operating Pressure:  
 50 p.s.i.g. minimum (3.5 bars)  
 95 p.s.i.g. maximum (6.6 bars)

### Fastener Specifications:

Senco Model SJS Medium-Duty Stapler drives <sup>1</sup>/<sub>8</sub>" to <sup>5</sup>/<sub>8</sub>" Senco staples—Sencote<sup>®</sup> or plain.

#### B SERIES

Lengths	SJS B04-B06				SJS B06-B08	
	Inches	X*	<sup>5</sup> / <sub>8</sub> "	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "
Millimeters	6		6	10	13	
Reorder No.	B04		B05	B06	B08	
Staples/Box	10/M		10/M	10/M	10/M	
Boxes/ Carton	30		20	20	15	

#### A & D SERIES

Lengths	SJS A03-A04				SJS A06-D10			
	Inches	<sup>1</sup> / <sub>2</sub> "	X*	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "
Millimeters	5	6	10	13	13	16	18	
Reorder No.	A03	A04	A06	A08	A08	D10	D10	
Staples/Box	10/M	10/M	30/M	10/M	20/M	10/M	20/M	
Boxes/ Carton	42	36	10	24	12	20	10	

#### C SERIES

Lengths	SJS C02				SJS C03-C06								SJS C06-C10			
	Inches	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "	X*	<sup>1</sup> / <sub>2</sub> "	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "
Millimeters	4	5	6	8	10	10	11	11	13	13	16					
Reorder No.	C02	C03	C04	C05	C06	C06	C07	C07	C08	C08	C10					
Staples/Box	20/M	20/M	10/M	10/M	10/M	50/M	10/M	50/M	10/M	50/M	10/M	50/M	10/M	50/M	10/M	
Boxes/ Carton	20	20	28	20	20	4	20	4	20	4	20	4	20	4	20	

#### E SERIES

Lengths	SJS E04		SJS E06-E10			
	Inches	X*	<sup>1</sup> / <sub>2</sub> "	<sup>3</sup> / <sub>4</sub> "	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "
Millimeters	6		10	11	13	18
Reorder No.	E04		E06	E07	E08	E10
Staples/Box	10/M		10/M	10/M	10/M	5/M
Boxes/ Carton	24		20	16	16	20

#### F SERIES


Lengths	SJS F04-F06		SJS F06-F08	
	Inches	X*	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "
Millimeters	6		10	13
Reorder No.	F04		F06	F08
Staples/Box	10/M		10/M	10/M
Boxes/ Carton	10		10	10


#### G SERIES

Lengths	SJS G04		SJS G06-G10	
	Inches	X*	<sup>1</sup> / <sub>2</sub> "	<sup>1</sup> / <sub>4</sub> "
Millimeters	6		10	13
Reorder No.	G04		G06	G10
Staples/Box	10/M		10/M	5/M
Boxes/ Carton	20		24	20

\* = Liquor Finish

X = Convenient Pack

 Do not lubricate Senco SJS PowerPlus<sup>®</sup> tools. Senco's PowerPlus tools require no lubrication. Oiling is unnecessary and, in fact, may be damaging to the tool.

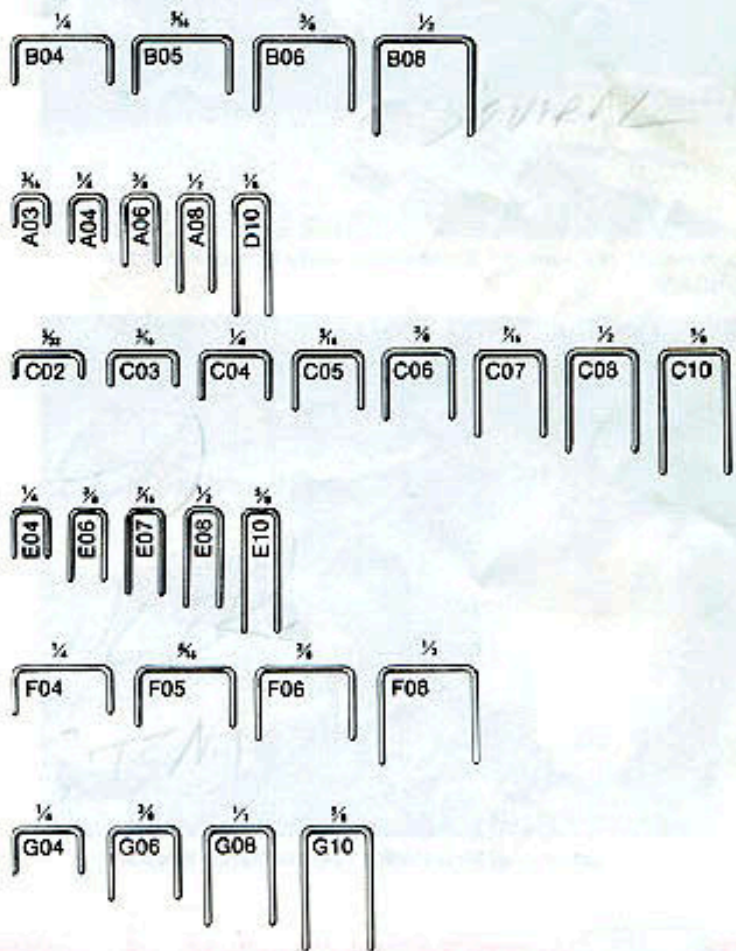

For additional information on how Senco fastening systems will save you time, reduce costs, and increase quality, call your nearest

Authorized Senco Dealer or Distributor listed in the Yellow Pages under "Staples," or call our toll-free Action Line: 1-800-543-4596.

# SENCO

FASTENING SYSTEMS

Safety First.  The only way to work.<sup>®</sup>