

This heavy-duty wide crown stapler is capable of handling a wide variety of applications. Constructed of durable, high-quality, high-strength materials, the WC200XP is designed for extreme performance and long life. It is also light and well-balanced to minimize operator fatigue.



### Specifications

Item#.....	4Y0001N
Contact actuation trigger	
Reg. Operating Pressure.....	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.) ...	3.45 scfm
Air Inlet.....	3/8" NPT
Tool Weight .....	5.3 lbs (2.4 kg)
Height.....	10" (254 mm)
Length .....	15.25" (387 mm)
Width .....	3.5" (89 mm)
Fastener Capacity.....	160

### Fastener Specifications


Gauge.....	16
Crown.....	1"
Fastener Range.....	7/8" – 2" (22 mm – 50 mm)
Finish.....	Galvanized, stainless
Collation.....	Straight glued taped strip

### Applications

Wire lathing, corrugated carton to skid, furniture/cabinet frames, and butt-joints. Also capable of handling asphalt roof shingles and attaching foam insulation board.

### Features and Benefits

- Five-year limited warranty
- Robust firing valve design makes the tool fast, powerful, efficient, and easy to maintain
- Positive-locking adjustable depth of drive ensures consistently flush drives and helps prevent over drives
- Aggressively tapered body allows for an improved line of sight for better shot accuracy
- Rotating belt hook makes the tool easily stowable and portable
- EZ clear latch provides easy access to clear fasteners
- High-strength composite magazine and metal magazine guide prevents wear and helps eliminate skip ping, jams, and misfires
- Large 3/8" inlet for increased air flow during high volume usage
- Durable deflector cap for superior impact resistance

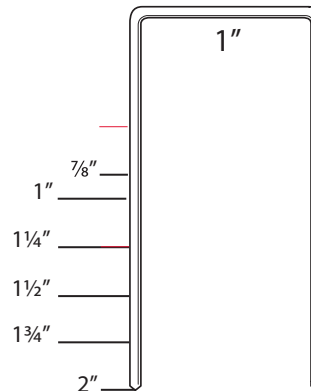



### SENCO® 16 Ga. 1" Crown Heavy Wire

Composite roofing, roofing felt, corrugated containers, foam insulation board.



Length	Item Code	Carton Count	Point	Finish	Coating
<u>Galvanized</u>					
7/8	P12BAB	10.M	Chisel	Galv	Sencote
1	P13BAB	10.M	Chisel	Galv	Sencote
1 1/4	P15BAB	10.M	Chisel	Galv	Sencote
1 1/2	P17BAB	10.M	Chisel	Galv	Sencote
1 3/4	P19BAB	5.M	Chisel	Galv	Sencote
2	P21BAB	5.M	Chisel	Galv	Sencote
7/8	P12BABB	10.M	Chisel	Galv	Sencote
1	P13BABB	10.M	Chisel	Galv	Sencote
1 1/4	P15BABB	10.M	Chisel	Galv	Sencote
1 1/2	P17BABB	10.M	Chisel	Galv	Sencote
1 3/4	P19BABB	5.M	Chisel	Galv	Sencote
2	P21BABB	5.M	Chisel	Galv	Sencote
<u>Stainless</u>					
1	P13GBGN	5.M	Outside Chisel	Stainless	Sencote

Choose the right trigger system for your specific needs!

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: [www.senco.com](http://www.senco.com)