


WHY CARRY SENCO COMPRESSORS

SENCO Compressors are made to the exacting standards specified by SENCO. Only the highest quality components are specified that will provide the reliability expected in SENCO's products.

WHEELBARROWS


Cast Iron Pump (with Two Year Warranty)

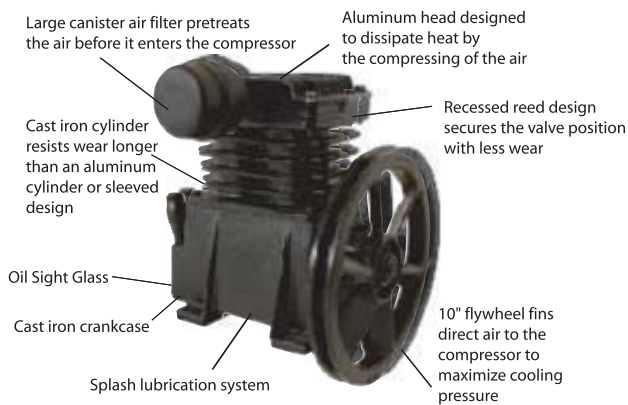

- Cast iron pump cylinder, crankcase and valve plate for durability
- Aluminum head cover for heat dissipation
- Braided stainless steel discharge hoses
- Dual control (constant run/on-off) feature on electric PC2016
- Cap start/run inductive motor with belt drive on PC2016
- High quality Honda, OHV engine on gas model PC2017
- One year limited warranty (2 years on pump)

HANDCARRIES

Fini Pumps on PC1005 & PC2001

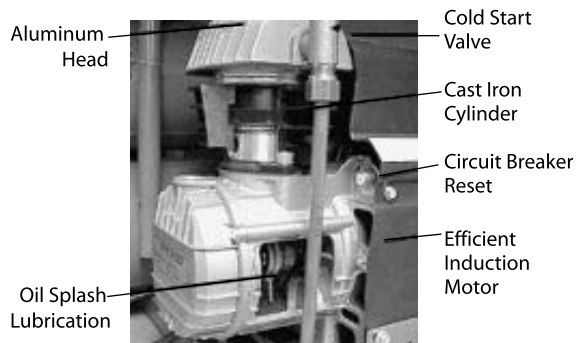

- Innovative PC1010 that weighs only 20 Lbs.
- Use of high quality Fini pumps and motors on PC1005 and PC2001
- Electric, PSC inductive direct drive motors
- One year limited warranty

COMPARISON CHART



Available
SPRING 2005

Model	PC1010	PC1005	PC0968	PC2001	PC2016	PC2017
Horsepower	1 HP Peak, 1/2 HP Running	1.5 HP Peak, 1 HP Running	1.5 HP Peak, 1 HP Running	2.5 HP Peak, 2 HP Running	2 HP Peak, 1.5 HP Running	5.5 HP
Gallon	1 gal	2.5 gal	2.5 gal	4.3 gal	8.0 gal	8.0 gal
Tank Type	Hot Dog	Hot Dog	Twin Stack	Twin Stack	Twin Pontoon	Twin Pontoon
Motor Type	Electric, PSC Inductive Direct Drive	Electric, PSC Inductive Direct Drive	Electric, PSC Inductive Direct Drive	Electric, PSC Inductive Direct Drive	Electric, Cap Start/Run Inductive Belt Drive	Gas
Pump Lubricant	Oil-less	Oil Splash	Oil-less	Oil Splash	Oil Splash	Oil Splash
Max Pressure	120 psi	125 psi	135 psi	125 psi	125 psi	125 psi
SCFM @ 90 psig	0.7	2.5	2.3	4.6	6.6	9.1
Current Draw	4 Amps	12 Amps	8 Amps	14 Amps	13 Amps (110V)	N/A
Motor RPM	3400	3400	3450	3400	1725	Auto-Advanced
Decibel Rating	69 dB	77 dB	80 dB	81 dB	77 dB	87 dB
Pump-Up Time	120 sec (0-120 psi)	59 sec (0-125 psi)	82 sec (0-135 psi)	58 sec (0-125 psi)	96 sec (0-125 psi)	54 sec (0-125 psi)
Recovery Time	35 sec (90-120 psi)	14 sec (90-125 psi)	17 sec (95-135 psi)	15 sec (90-125 psi)	17 sec (95-125 psi)	14 sec (95-125 psi)
Head	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum Cover, Cast Iron Valve Plate	Aluminum Cover, Cast Iron Valve Plate
Cylinder	Aluminum	Aluminum	Aluminum	Cast Iron	Cast Iron	Cast Iron
Crankcase	Aluminum	Aluminum	Aluminum	Aluminum	Cast Iron	Cast Iron
Weight (lbs.)	20 lbs	38 lbs	38 lbs	58 lbs	176 lbs	190 lbs
Length (in.)	14"	22"	16"	20"	44.5"	44.5"
Width (in.)	12.5"	9"	15"	15"	18.5"	18.5"
Height (in.)	10.3"	18"	13.5"	17"	25"	26"
Cold Start	No	No	Yes	Yes	N/A	N/A
Discharge Line	Copper	Aluminum	Braided Stainless Steel	Copper	Braided Stainless Steel	Braided Stainless Steel
CSA Approved	Yes	Yes	Yes	No	Yes	N/A
Warranty	1 Year	1 Year	1 Year	1 Year	1 Year (2 years on Pump)	1 Year (2 years on Pump)
Others	Resetable Breaker	Resetable Breaker	Resetable Breaker	Resetable Breaker	Pneumatic Tire 110V/220V Dual Control (Constant / On-Off)	Pneumatic Tire Pneumatic Throttle

COMPRESSORS

PC1010

1.0 HP (Peak), 1/2 HP (Running) Electric Oil-Less Compressor



Features

- Hand carry - ultra quiet and lightweight
- Direct drive motor/pump for efficient operation
- 1.0 gallon of air capacity, aluminum cylinder
- Standard equipment: regulator, pressure gauges, 1/4" coupler, air filter
- Comfortable cushioned grip
- Draws only 4 amps @ 115v
- One year warranty
- CSA approved
- Size - 10.3"H X 14"L X 12.5"W
- Weight - 20 lbs

Applications

Finish and trim, hobbies and crafts.

PC1005

1.5 HP (Peak), 1 HP (Running) Electric Oil-Splash Compressor



Features

- Hand carry - compact and lightweight
- Direct drive motor/pump for efficient operation
- Aluminum cylinder with steel sleeve for longer life
- Cast aluminum pump for less weight and superior heat dissipation
- Portable "hot dog" tank
- 2.5 gallons of air capacity
- Standard equipment includes 1/4" universal coupler, regulator, pressure gauge
- One year warranty
- Size - 18"H X 22"L X 9"W
- Weight - 38 lbs

Applications

Finish and trim.

PC0968

1.5 HP (Peak), 1.0 HP (Running) Electric Oil-Less Compressor



Features

- 2.5 gallon of air capacity
- Max pressure to 135psi
- Draws only 8 amps @ 115v
- Stainless steel braided discharge hose
- Individual gauges for tank & regulated output pressure
- 1/4" quick disconnect coupler
- One year warranty
- CSA approved
- Size - 13.5"H X 16"L X 15"W
- Weight - 28 lbs

Applications

Finish and trim.

2.5 HP (Peak), 2.0 HP (Running) Electric Oil-Splash Compressor



Features

- Hand carry - compact and lightweight
- Direct drive motor/pump for efficient operation
- Cast iron cylinder - The ultimate in durability
- 4.3 gallons of air capacity
- Cold-weather valve for easy start-up in cold climates
- One year warranty
- CSA approved
- Size - 17"H X 20"L X 15"W
- Weight - 58 lbs

Applications

Framing and sheathing, roofing and decking, finish and trim.

2.0 HP (Peak), 1.5 HP (Running) Electric Wheelbarrow Oil-Splash Compressor



Features

- Quality cast iron single stage 2 cylinder compressor, cast iron crankcase with a large oil reservoir for reliable lubrication
- Oil sight glass for quick level checks
- Aluminum head for heat dissipation
- Stainless-steel braided discharge hose
- Industrial ul listed electric motor
- Splash lubrication extends the hours of performance
- 10" fly wheel for extra cooling and longer life
- Powder coated 8 gallon twin tanks
- Pneumatic tire with tube and steel hub
- Regulator and outlet pressure gauge
- Tank pressure gauge
- Dual control for constant run or on/off operations
- One year limited warranty (two years on the pump)
- Size - 25"H X 44.5"L X 18.5"W
- Weight - 176 lbs

Applications

Framing and sheathing, roofing, decking, finish and trim.

5.5 HP Gas Wheelbarrow Oil-Splash Compressor



Features

- Quality cast iron single stage 2 cylinder compressor, cast iron crankcase with a large oil reservoir for reliable lubrication
- Oil sight glass for quick level checks
- Aluminum head for heat dissipation
- Stainless-steel braided discharge hose
- Industrial OHV Honda engine
- Splash lubrication extends the hours of performance
- 10" fly wheel for extra cooling and longer life
- Powder coated 8 gallon twin tanks
- Pneumatic tire with tube and steel hub
- Regulator and outlet pressure gauge
- Tank pressure gauge
- Throttle control with automatic idle for reduced wear
- One year limited warranty (two years on the pump)
- Size - 26"H x 44.5"L x 18.5"W
- Weight - 190 lbs

Applications

Framing and sheathing, roofing, decking, finish and trim.