

This well-balanced lightweight XP framing nailer packs plenty of power and won't leave you fatigued at the end of the day. Drives ring, screw, and smooth-shank full round head nails for tough fastening jobs. SENCO XP tools are specifically engineered for demanding pros and demanding environments. Built with enhanced features and superior components – SENCO's XP tools always provide the best performance and longest life backed by a 5-year limited warranty.




## Tool Specifications:

Item #: 4H0001N  
 Tool Weight: 7.4 lbs. (3.4 kg)  
 Height: 11.65" (296 mm)  
 Length: 20.3" (516 mm)  
 Width: 4.5" (114 mm)  
 Collation: 20° strip  
 Capacity: 60 nails  
 Operating Pressure: 70-120 p.s.i.g. (4.8-8.3 bar)  
 Mode of Operation: Selectable trigger mechanism allows either sequential or contact actuation.  
 Air Inlet: 3/8" NPT  
 UPC: 741474060335  
 Packaged Dimensions: L: 21", H: 14.75", W: 5.25", Wt: 8.5 lbs.

## Fastener Specifications:

Drives .113 – .148, Smooth 2"– 3¼", Screw 2 ½" – 3", Ring 2" – 3"

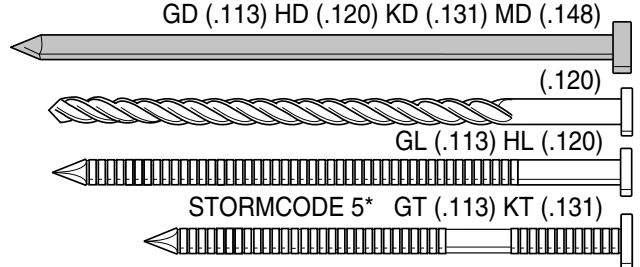

## Applications:

Framing, sheathing, truss building, sub-flooring and decks. Other applications include crate and box assembly, pallet making, furniture frame assembly and fencing.

## Features and Benefits:

- Well balanced and lightweight – 7.4 lbs.
- Uses up to 15% less air – Highly efficient internal design
- Reduced jams and mis-feeds – Patented TrueDrive™ magazine
- Easily fits between studs and joists – Low profile design
- Contact or sequential trigger actuation – Patented drive selector

## Genuine SENCO Fasteners Available:

### Smooth-Shank

Length	Item Code	Carton Count	Finish
2 x .113	GD21APBSN	5.M	Bright
2¼ x .148	MD23APBSN	4.M	Bright
2⅝ x .113	GD24APBSN	5.M	Bright
2½ x .113	GD25APBSN	5.M	Bright
3 x .120	HD27APBSN	4.M	Bright
3 x .131	KD27APBSN	4.M	Bright
3 x .148	MD27APBSN	4.M	Bright
3¼ x .120	HD28APBSN	4.M	Bright
3¼ x .131	KD28APBSN	4.M	Bright
3¼ x .148	MD28APBSN	4.M	Bright
2 x .113	GD21AABS	4.M	Galv
2½ x .113	GD25AABS	5.M	Galv
2½ x .113	M002098	2.5M	Galv
2½ x .131	KD25AABS	2.5M	Galv
3 x .131	KD27AABS	4.M	Galv
3 x .131	M002046	2.5M	Galv
3¼ x .131	KD28AABS	4.M	Galv
3¼ x .131	M002047	2.5M	Galv
2⅝ x .113	GD24ASBS	2.5M	Hot Dip
3 x .131	KD27ASBS	2.5M	Hot Dip
3¼ x .131	KD28ASBS	2.5M	Hot Dip
3¼ x .131	KD28AGBS	1.M	Stainless

### Ring-Shank

Length	Item Code	Carton Count	Finish
2⅝ x .113	GL24APBSN	5.M	Bright
2⅝ x .113	GL24AABS	5.M	Galv
2⅝ x .113	M002042	5.M	Galv
3 x .120	HL27AABS	4.M	Galv
2⅝ x .113	GL24ASBS	2.5M	Hot Dip
3 x .120	HL27ASBS	2.5M	Hot Dip
2⅝ x .113	GL24AGBS	1.M	Stainless
3 x .120	HL27AGBS	1.M	Stainless
2½ x .131	GT25APAS	5.M	Bright
2½ x .131	KT25APAS	5.M	Bright



STORM CODE 5 Nails feature a unique patented design with proprietary shank and increased head diameter for use in severe weather regions.

## Unique Features of the SN902XP



### \*Choose the right actuation mode!

**Sequential Actuation** (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.



Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line 800-543-4596, or visit our web site at [www.senco.com](http://www.senco.com).