




HARD WORK. BRING IT ON.™

DuraSpin™ DS300-S2

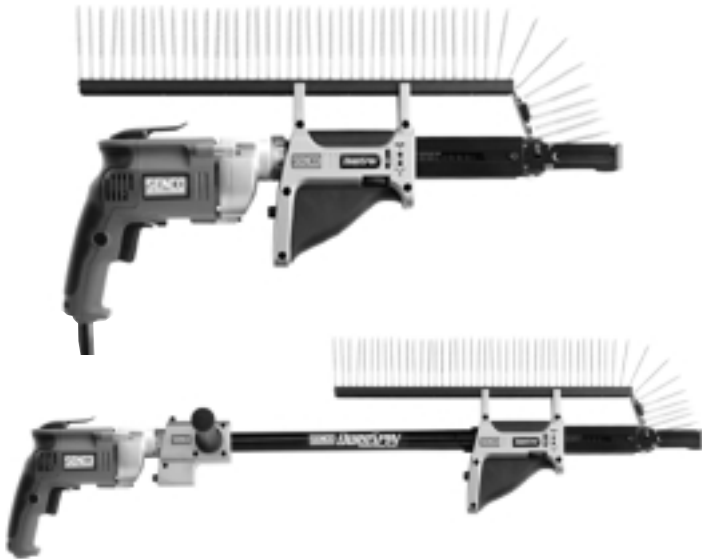

Capable of driving all Senco DuraSpin™ screws from 1-5/8" – 3" in length, this tool is ideal for wood screw applications. The Senco DuraSpin™ DS300-S2 collated screw system comes conveniently assembled to a rugged 2500 rpm Senco screwdriver. The DS300-S2 comes complete with the DuraSpin™ collated screw feed system mounted on a screwdriver, a flooring extension, a rugged carrying case and two spare bits.

Applications:

Ideal for driving screws from 1-5/8" – 3" in length for exterior decking, floor sheathing and other wood-to-wood or wood-to-steel applications.

Features and Benefits:

- Patented Senco DuraSpin™ feed system drives screws quickly and efficiently without jams or misfeeds.
- Ergonomic design – May be used with a one-handed or two-handed grip. Cushioned second hand grip provides added comfort and reduced exertion.
- Flooring extension included – Allows screws to be driven efficiently from a comfortable standing position.
- Easy Depth-of-Drive Adjustment – Just turn the thumb screw to regulate the precise amount of countersink.
- Quick Release – Feed system snaps off to give easy bit access.
- Adjustable Nose Piece – Easily adjusts for screw sizes from 1-5/8" – 3" (41 mm – 75 mm).
- Super-Tough Drive Bits – Outlast the competition.
- Senco's Full One-Year Warranty.
- Modular design – Snaps together with or without flooring extension, quickly and easily, with no tools.

Tool Specifications:

Model #: DS300-S2

Item Code: 790024N

RPM: 2500 rpm

Current: 5.4 amps

Without Extension

With Extension

Weight:

5.5 lbs (2.5 kg)

7.5 lbs (3.4 kg)

Height: 9.25" (234 mm)

Length:

20.5" (520 mm)

40" (1015 mm)

Width: 2.75" (70 mm)

Fastener Capacity: 50 screws (per strip)

Fastener Specifications: (see reverse side)

Screw Lengths: 1-5/8" – 3" (41 mm – 75 mm)


Screw Diameters: #6 – #10





HARD WORK. BRING IT ON.™

DuraSpin™ DS300-S2

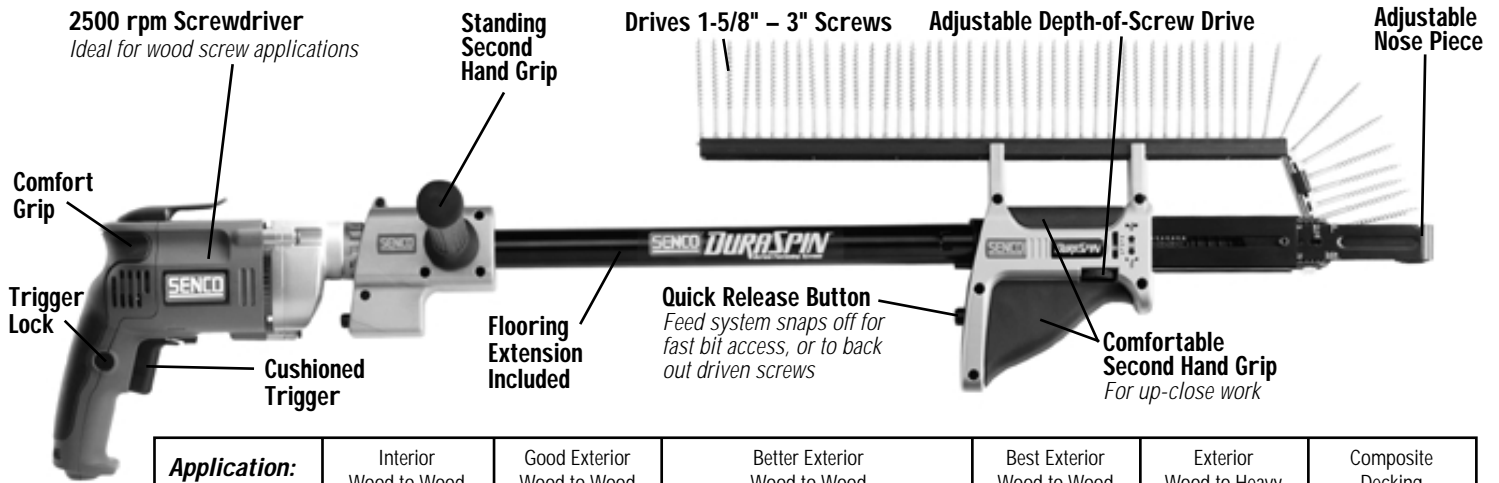

For additional information on how Senco Fastening Systems will save you time, reduce costs and increase quality, call your nearest Authorized Senco Dealer or Distributor listed in the Yellow Pages under "Staples," or call our toll-free Action Line: 1-800-543-4596.

Application:	Interior Wood to Wood	Good Exterior Wood to Wood (Decking)	Better Exterior Wood to Wood (Decking)		Best Exterior Wood to Wood (Decking)	Exterior Wood to Heavy Steel	Composite Decking
Screw:							
Drive/Head:	#2 Square Flat	#2 Square Flat	#2 Phillips Bugle	#2 Square Flat	#2 Square Flat	#2 Square Flat	#2 Square Modified Trim
Thread:	Coarse ² / ₃ with Wax	Coarse ² / ₃ with Wax	Coarse	Coarse ² / ₃ with Wax	Coarse ² / ₃ with Wax	Fine	Coarse ² / ₃ with Wax
Point:	Sharp	Type 17 (Cut)	Sharp	Type 17 (Cut)	Type 17 (Cut)	Self-Drilling with Wings	Type 17 (Cut)
Finish:	Yellow Zinc (Minimal Rust Protection)	Silver Kylan*	Weatherex II**		Stainless Steel	Silver Kylan*	Stainless Steel

*Provides corrosion resistance in excess of 1,000 hours in salt spray (in accordance with ASTM-B117-94).

**Provides corrosion resistance in excess of 1,000 hours in salt spray (per ASTM-B117-94) and meets requirements of ASTM-B633, Type II Severe Condition (SC3). Equivalent to ASTM-A641 "Type 1" galvanization.