



# 06C\_C Series

## SCREW SPECIFICATIONS

Screw Gauge	#6
Length	1" - 2"
Recess	#2 Phillips
Head	Bugle
Point	Drill
Thread Type	Fine (20 TPI)
Finish	Clear Zinc



#2 Phillips



Bugle



Drill

## Drill Point Drywall Screw

Drywall to heavy steel fastener for 35 - 90 mil steel

### APPLICATIONS

- Gypsum sheathing to heavy gauge metal studs (35 - 90 mil)



### FEATURES AND BENEFITS

- Phillips recess provides smooth engagement with moderate torque transmission.
- Bugle head provides consistent penetration without damaging the paper
- Fine threads provide improved holding power and thread-forming capability when driving into heavy steel studs
- Forged and hardened drill point
- Clear Zinc finish
- ICC approval information available in ESR-3558

### INSTALLATION GUIDELINES

- Use a screwdriver with a precise depth-sensitive clutch and speeds of up to 5000 RPM
- Overdriving may cause a weak connection or thread strip-out of the steel
- The drive is finished when the screw is just below the work surface without tearing the paper
- Three full threads must extend past the base metal for an acceptable connection



# 06C\_C Series

## Drill Point Drywall Screw

Drywall to heavy steel fastener for 35 – 90 mil steel



### ORDERING INFORMATION

Item Code	Gauge	Length	Thread	Finish	Quantity	Drive Type	Point	Head
06C100C	#6	1"	Fine	Clear Zinc	1000 Tub	#2 Philips	Drill	Bugle
06C125C	#6	1 1/4"	Fine	Clear Zinc	1000 Tub	#2 Philips	Drill	Bugle
06C125CB	#6	1 1/4"	Fine	Clear Zinc	4000 Box	#2 Philips	Drill	Bugle
06C162C	#6	1 5/8"	Fine	Clear Zinc	1000 Tub	#2 Philips	Drill	Bugle
06C162CB	#6	1 5/8"	Fine	Clear Zinc	4000 Box	#2 Philips	Drill	Bugle
06C200C	#6	2"	Fine	Clear Zinc	1000 Tub	#2 Philips	Drill	Bugle
06C200CB	#6	2"	Fine	Clear Zinc	4000 Box	#2 Philips	Drill	Bugle

### TECHNICAL INFORMATION


Ultimate Tensile (lbs)*	Torsional Strength (lbs-in)*
1600	28.5

\*Figures represent ultimate average test results. An appropriate safety factor must be applied for design purposes

Finish	Testing Standard	Corrosion Resistance
Clear Zinc	ASTM B117 Salt Spray Test	Over 24 Hours without red rust

#### Reference Dimensions

Length (L):	1, 1.25, 1.63, 2.0 in
Head Diameter (A):	0.32 in
Head Height (H):	0.18 in
Major Diameter (D):	0.14 in
Minor Diameter (B):	0.10 in
Length of Drill (S):	0.16 in
Diameter of Drill (M):	0.11 in
Threads Per Inch (TPI):	20 threads/in

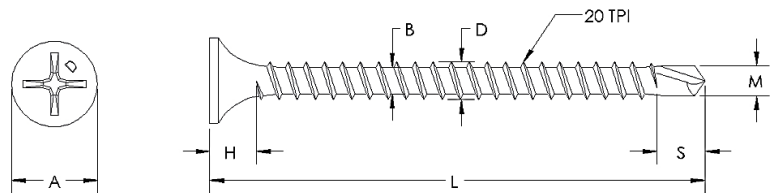

Fasteners comply with ASTM C954, as referenced in ICC report ESR-3558. They are in compliance with the 2012 and 2015 International Building code and 2012 and 2015 International Residential code.

