




10M062EBFFDX

SCREW SPECIFICATIONS

| | |
|-------------|-------------|
| Screw Gauge | #10 |
| Length | 5/8" |
| Recess | Rex Drive |
| Head | Pan Framing |
| Point | Drill |
| Thread Type | Fine |
| Finish | E1000 |

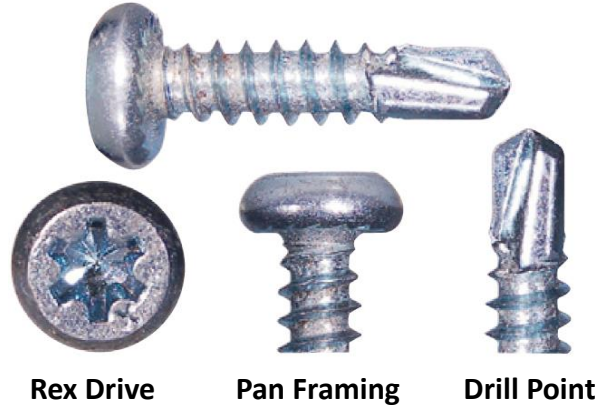

Pan Framing Head Drill Point Screw

Exterior metal to metal fastener

APPLICATIONS

- Exterior trailer sheathing (A.K.A. Skins)
- Designed for steel to steel fastening (35 - 110 mil)



FEATURES AND BENEFITS

- Our Rex drive recess provides smooth engagement with high torque transmitting capability reducing operator fatigue, and extending bit life
- Pan framing head with serrations provides a low profile fastener that will not back out over time
- Fine threads provide improved holding power and thread-forming capability when driving into heavy steel
- Forged and hardened drill point
- SENCO E1000 finish provides the look of clear zinc with 1000 hours salt spray performance

INSTALLATION GUIDELINES

- Use a screwdriver with a torque controlled or precise depth-sensitive clutch and speeds of up to 2500 RPM
- Overdriving may cause a weak connection or fastener failure
- Three full threads must extend past the base metal for an acceptable connection

10M062EBFFDX



Pan Framing Head Drill Point Screw

Exterior metal to metal fastener

ORDERING INFORMATION

| Item Code | Gauge | Length | Thread | Finish | Quantity | Drive Type | Point | Head |
|--------------|-------|--------|--------|--------|----------|------------|-------|-------------|
| 10M062EBFFDX | #10 | 5/8" | Fine | E1000 | 6000 Box | Rex Drive | Drill | Pan Framing |

TECHNICAL INFORMATION

| Ultimate Tensile (lbs)* | Torsional Strength (lbs-in)* |
|-------------------------|------------------------------|
| 3175 | 61 |


| Base Metal Thickness (in) | Lap Joint Shear (lbs)* | Pull Out (lbs)* | Pull Over (lbs)* |
|---------------------------|------------------------|-----------------|------------------|
| 0.04 | 697 | 296 | 1505 |
| 0.05 | 837 | 378 | 1505 |
| 0.06 | 1536 | 574 | 2365 |
| 0.07 | 1551 | 801 | 2643 |
| 0.10 | 1551 | 1175 | 2643 |

*Figures represent ultimate average test results. An appropriate safety factor must be applied for design purposes

| Finish | Testing Standard | Corrosion Resistance |
|--------|---------------------------|----------------------------------|
| E1000 | ASTM B117 Salt Spray Test | Over 1000 Hours without red rust |

Reference Dimensions

| | |
|-------------------------|---------------|
| Length (L): | 0.63 in |
| Head Diameter (A): | 0.35 in |
| Head Height (H): | 0.13 in |
| Major Diameter (D): | 0.19 in |
| Minor Diameter (B): | 0.14 in |
| Length of Drill (S): | 0.27 in |
| Diameter of Drill (M): | 0.16 in |
| Threads Per Inch (TPI): | 16 threads/in |

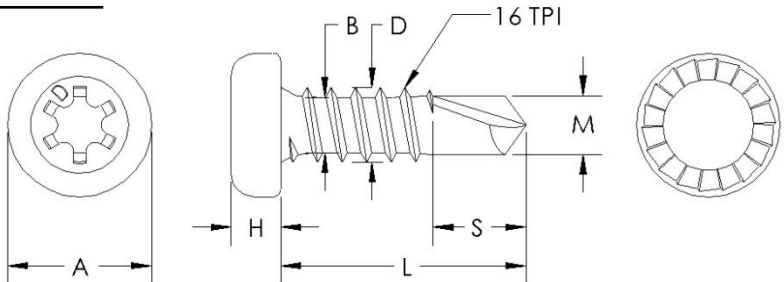

Fasteners comply with ASTM C1513