



KYOCERA SENCO Industrial Tools



2023 PRODUCT CATALOG

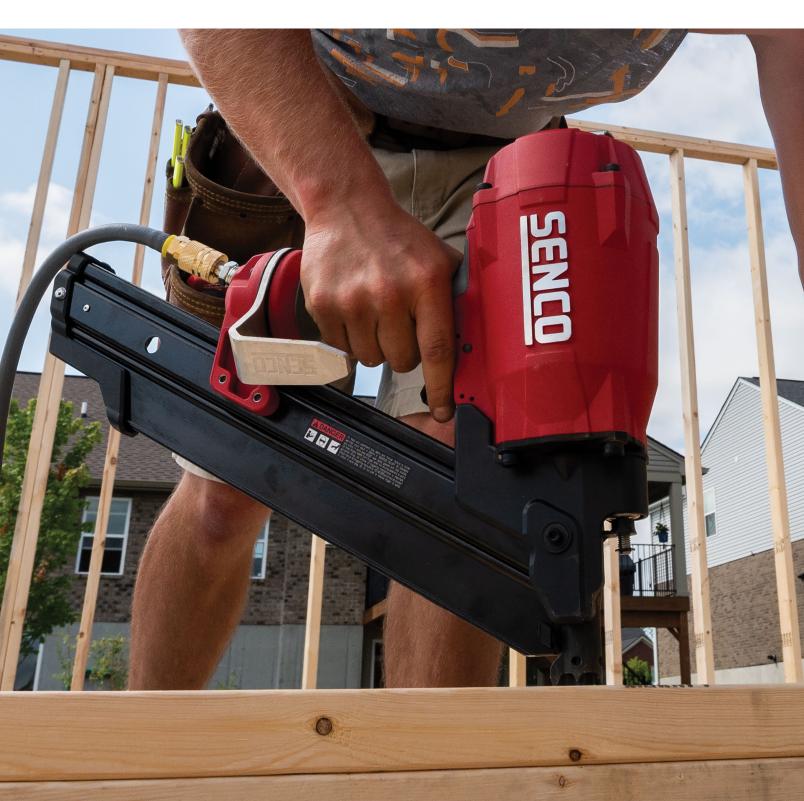

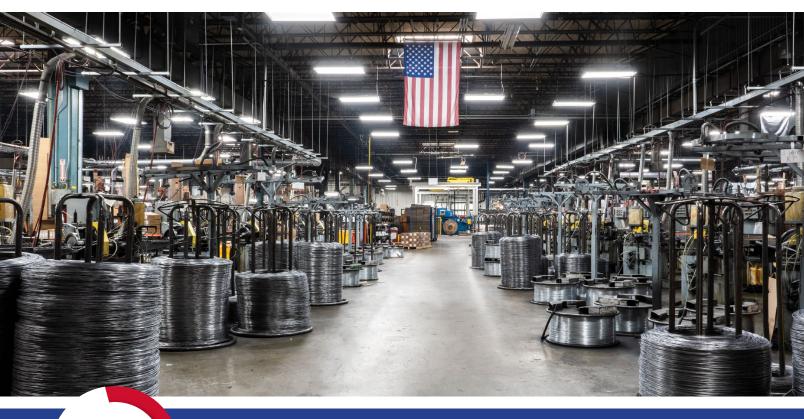



OVER 80% OF THE FASTENERS WE SELL ARE MANUFACTURED IN **CINCINNATI**

- Steel rod purchased from US manfacturers
- Rod drawn down to exact wire gauge sizes
- ICC Certified Facility
- Clean wire process
- Each box date stamped for Quality Assurance
- All precision forming dies made in house











TABLE OF CONTENTS

See all tools at a glance in the foldout located on pages 88-90



15

16

17

18

19

20

21

22

23-29

DURASPIN® Auto-Feed Screw Systems

TN21L1, LS1XP, FinishPro18Mg, FinishPro18BMg

FinishPro30XP, FinishPro35Mg, FinishPro42XP

SLP20XP, FinishPro25XP, FinishPro16XP

DS225-18V, DS222-18V, DS322-18V	3
DS245-AC, DS242-AC, DS342-AC	4
DS230-S1, DS230-M1, DS230-D1, DS230-D2	5
DS530 Series, DS532-AC, DS534-AC	6
SG2510, SG4100	7
Collated Screws	8–11
Screw System Accessories	12-13

Pallets & Crating

PalletPro57FXP, PalletPro100XP, PalletPro130XP	55
DFPXP, F75LXP, F75SXP	56
Fasteners	57-59

Upholstery & Furniture

SFT10XP Family	61
SFW09, NS20BXP	62
Fasteners	63-65

Flooring	- Contraction
SHF200, SLS20XP-HF	67
Fasteners	68



86-87

88-90



Framing, Sheathing & Subfloors

Finish & Woodworking F-18XP, F-16XP, F-15XP, F-LXP

SLS20XP, SLS25XP, SKSXP

SC1XP Senclamp, SC2 Sencor

SLS150Mg, SLS18Mg

Fasteners

TN11G1, TN11L1

F-35XP, F-35FRHXP	31 32
	32
FN91T, FN81T1	
FramePro325XP, FramePro701XP, FramePro751XP	33
FramePro325FRHXP, FramePro702XP, FramePro752XP	34
SCN60XP, SCN65XP, Mini Hand Nailer, A20 Hand Nailer	35
JN91H1, JN91H2, JN91P1, JN91P2	36
SCP40XP, PS15XP, PS20XP	37
NS20XP, NS20BXP, SNS41, SQS55XP	38
Fasteners 3	39-47

PC1131, PC0968, PC1280, PC1010, PC1010N, PC0947	7

Accessories

Fasteners at a Glance

Tools at a Glance

10063301163	
Air Hoses	73
Plugs & Couplers, Swivel Plugs & Swivel Couplers	74
Air Hose & Compressor Accessories, Regulators & Gauge	es 75
Oils & Lubricants, Safety Glasses & Tool Belt Hooks, Extended Length Magazines	76
Battery & Charger Systems, No-Mar Pads	77
Parts Kits	78

Product Reference Fastener Finish Types 79 Box, Carton & Pallet Quantities - Fasteners 80-81 Item Code Index 82-85

Roofing, Siding & Fencing	
RoofPro445XP, SN71P1	49
PS15RXP, BC58, A11	50
Fasteners	51-53





DURASPIN **PRODUCTIVITY REDEFINED**

DURASPIN® screw systems help you get the job done up to four times faster than bulk screwdrivers and loose screws, improving jobsite productivity by more than 30%.

APPLICATIONS

Our full line of integrated tools, attachments, kits, and accessories can tackle almost any job including drywall, sub-flooring, decking, metal framing, and a variety of commercial and industrial applications. For projects with tough requirements, our wide selection of ICC and Miami-Dade certified screws will keep your job on target. Check out our next generation of DURASPIN® auto-feed screw systems with enhanced features that redefine productivity and help you get the job done faster and easier.

KEY FEATURES

- Patented corner-fit feed system for better screw placement in tight spaces and corners
- Locking depth-of-drive adjustment
- Tool-free adjustable nosepiece
- Easily load 50 screws in less than a second
- Trigger lock for continuous operation
- Long-lasting drive bits with quick-slide release



DS225-18V

2" CORDLESS 18V LI-ION 5000 RPM

ITEM #10A0002N

2 bits included

Features

- High-speed, efficient brushless motor designed for drywall applications
- · Features feed on return the next screw is aligned with the bit for better line of sight and more accurate screw placement
- Patented corner fit technology
- Includes 2 bits, 1 Li-ion battery, quick charge battery charger and storage bag

DS322-18V

3" CORDLESS 18V LI-ION 2500 RPM

ITEM #10C0002N

Features

heavy steel

and storage bag



Selectable 2500/1600 RPM

efficient brushless motor • Toe nailing nosepiece

· Variable speed selector for

• Features feed on return - the

next screw is aligned with the

bit for better line of sight and

 Includes 2 bits. 1 Li-ion battery. quick charge battery charger

more accurate screw placement

General Applications Including

SECONDARY APPLICATIONS

Decking, Docks, Crating, Gypsum/ Sheathing to Steel, Tile Roofing

DS222-18V

2" CORDLESS 18V LI-ION 2500 RPM

ITEM #10B0002N

5000 RPM/TPM

BRUSHLESS

Motor

2500 RPM/TPM

BRUSHLESS MOTOR



Features

- Selectable 2500/1600 RPM efficient brushless motor
- Features feed on return the next screw is aligned with the bit for better line of sight and more accurate screw placement
- Patented corner fit technology Includes 2 bits 11 i-ion battery
- quick charge battery charger and storage bag

З

2500 RPM/TPM

BRUSHLESS

Motor

DURASPIN Auto-Feed **Cordless Screwdrivers**

Productivity Redefined

- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Universal toe-nailing nosepiece
- Powered by 18V Li-Ion extended life battery

 Quick charge battery charger

PRIMARY APPLICATIONS

Including Metal Framing/Decking

SECONDARY APPLICATIONS

Crating, Gypsum/Sheathing to

High Torque Applications

Steel, Decking, Subfloor

- Tool-free screw length adustment
- Variable speed trigger with lock and reverse
- Adjustable belt hook



Product Reference Chart

TOOL SPECS	DS225-18V	DS222-18V	DS322-18V
Speed (RPM)	0-5000	0-1600, 0-2500 (Selectable) 0-1600, 0-2500 (Select	
Voltage	18V	18V	18V
Weight w/ Battery	5.1 lbs (2.3 kg)	5.3 lbs (2.4 kg)	5.4 lbs (2.5 kg)
Height	9.6″ (244 mm)	9.6″ (244 mm)	9.6″ (244 mm)
Length	13.7" (348 mm)	13.7″ (348 mm)	14.5″ (368 mm)
Width	3.4" (86.4 mm)	3.4" (86.4 mm)	3.4" (86.4 mm)
Warranty	5 yr	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11		
Range	1''-2''*	1''-2''*	1''-3''
Shank Diameter	#6 - #8	#6 - #12	#6 - #12
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes
Trigger	Variable with Lock	Variable with Lock	Variable with Lock
Power Type	Cordless	Cordless	Cordless
Reversible	Yes	Yes	Yes

* 1/2" - 2" with nosepiece sold separately, part #FC0822

PRIMARY APPLICATIONS

PRIMARY APPLICATIONS

Underlayment

High Speed Applications Including

Drywall to Wood or Light Steel

SECONDARY APPLICATIONS

Subfloor, Sheathing, Cement Board,

Wood Decking, Tile Roofing, Crating

SCREWDRIVERS ОШ CORD AUTO-FEED

DS245-AC

DS342-AC

ITEM #10F0001N

3" CORDED 2500 RPM

· High-torque motor for driving

Product Reference Chart

into dense material

· Corner-fit feed system

2" CORDED 5000 RPM



DS242-AC

2" CORDED 2500 RPM

ITEM #10E0001N 2500 2 bits included Features PRIMARY APPLICATIONS High-torque motor for driving Metal Framing, Cement Board into dense material

- · Corner-fit feed system Feed on return
- Includes 2 bits and carrying baq

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Wood Decking, Composite Decking

DURASPIN Auto-Feed **Corded Screwdrivers**

Productivity Redefined

- Patented corner-fit feed system
- · Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Universal toe-nailing nosepiece
- Tool-free screw length adjustment
- Variable speed trigger with lock and reverse
- Screw-strip guide
- Adjustable belt hook
- Heavy duty 10' power cord

TOOL SPECS	DS245-AC	DS242-AC	DS342-AC
Speed (RPM)	0-5000 0-2500		0-2500
Current (Amps)	6.0	6.0	6.0
Voltage	120V/60Hz	120V/60Hz	120V/60Hz
Weight	5.5 lbs (2.5 kg)	5.7 lbs (2.6 kg)	6.7 lbs (3.0 kg)
Height	9.7″ (246 mm)	9.7" (246 mm)	9.7" (246 mm)
Length	16.3" (417 mm)	16.4" (417 mm)	17.2" (437 mm)
Width	3.2" (81 mm)	3.2" (81 mm)	3.2" (81 mm)
Warranty	5 yr	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11		
Range	1''-2''*	1''-2''*	1"-3"
Shank Diameter	#6 - #10	#6 - #12	#6 - #12
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes
Trigger	Variable with Lock	Variable with Lock	Variable with Lock
Power Type	Corded	Corded	Corded
Reversible	Yes	Yes	Yes

2500

BPM/TPM

PRIMARY APPLICATIONS

Wood Decking, Composite

Decking, Sheathing to Steel

SECONDARY APPLICATIONS

Subfloor, Underlayment, Metal

Framing, Cement Board

Drywall to Wood, Drywall to Steel,

* $\frac{1}{2}$ " – 2" with nosepiece sold separately, part #FC0822

4

- Feed on return • Includes 2 bits and carrying

bag

2 bits included

Features

DS230-S1

2" AUTO-FEED SCREWDRIVER ATTACHMENT



DS230-M1

2" AUTO-FEED SCREWDRIVER ATTACHMENT

DURASPIN 2" Auto-Feed Screwdriver Attachments

Convert a standard screwdriver into an auto-feed screw system in seconds

- Patented corner-fit feed system
- · Feed on return functionality to improve speed and reliability of drives
- Universal nosepiece for drywall and wood applications
- Easily remove attachment to access bit
- Tool-free screw length adjustment
- Supports several screwdriver models
- Precise depth of drive adjustment with depth lock



5

Product Reference Chart

TOOL SPECS	DS230-S1	DS230-M1	DS230-D1	DS230-D2
Weight	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)
Height	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)
Length	11.0" (280 mm)	11.0" (280 mm)	10.8" (274 mm)	10.3" (262 mm)
Width	2.5" (64 mm)	2.5″ (64 mm)	2.5" (64 mm)	2.5″ (64 mm)
Warranty	5 yr	5 yr	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8-11			
Range	1″-2″	1″-2″	1″–2″	1″–2″
Shank Diameter	#6 - #12	#6 - #12	#6 - #12	#6 - #12
TOOL FEATURES				
Depth-of-Drive	Yes	Yes	Yes	Yes



ന

6

DS530 Series

3" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #10X0002N | #10X0012N | #10X0022N



 Adjustable Depth-of-Drive with Depth Lock

DS530-S1 (10X0002N)

- for SENCO Models:
- SG2510 SG4100

DS530-D1 (10X0012N) for DeWalt Models:

- DW252 DW253 DW255
- DW257 DW266 • DW272 • DW276 • DCF624

DS530-M1 (10X0022N) for MAKITA Models:

- FS2200 FS2500 FS4200
- FS6200 XSF03 XSF04
- XSF05

DS532-AC

3" ATTACHMENT KIT WITH 2500 RPM SCREWDRIVER



- 3-in-1 Tool Kit
- Feed On Return
- Patented Sliding Screw Guide
- Corner-Fit Feed System
- Quick Release Clamp

APPLICATIONS

Wood and Composite Decking, Cement Board, Sub-Flooring and Underlayment, Sheathing to Steel, Steel Decking, Drywall to Wood or Steel

DS534-AC

3" ATTACHMENT KIT WITH 4000 RPM SCREWDRIVER



Features

- 3-in-1 Tool Kit
- Feed On Return • Patented Sliding Screw Guide
- Corner-Fit Feed System
- Quick Release Clamp

APPLICATIONS

Sub-Flooring, Underlayment, Wood and Composite Decking, Cement Board, Drywall to Wood, Drywall to Steel

Product Reference Chart

TOOL SPECS	DS530 SERIES		
Weight	3.4 lbs. (1.5 kg)		
Height	3.5" (89 mm)		
Length	33" (838 mm)		
Width	2.75" (70 mm)		
Warranty	5 yr		
FASTENER SPECS	Collated screws are located on pages 8–11		
Range	1″-3″		
Shank Diameter	#6 - #12		
TOOL FEATURES			
Depth-of-Drive	Yes		

Additional screwdrivers, bits and adaptors sold separately - see page 12

Product Reference Chart

TOOL SPECS	DS532-AC	DS534-AC	
Speed (RPM)	0-2500	0-4000	
Current (Amps)	6.5	6.5	
Weight	7 lbs (3.2 kg)	7 lbs. (3.2 kg)	
Height	7" (178 mm)	7" (178 mm)	
Length	40.5" (1029 mm)	40.5" (1029 mm)	
Width	2.75" (70 mm)	2.75" (70 mm)	
Warranty	5 yr	5 yr	
FASTENER SPECS	Collated screws are located on pages 8–11		
Range	1″-3″	1″-3″	
Shank Diameter	#6 - #12	#6 - #12	
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	
Belt Hook	Yes	Yes	
Trigger	Variable with lock	Variable with lock	
Power Type	Corded	Corded	
Reversible	Yes	Yes	

SG2510

HIGH-PERFORMANCE 2500 RPM SCREWDRIVER



A 🗆

Features

- High-torque motor for
- driving into dense materials • Industrial-grade metal gear
- housing designed to sustain heavy usage • Great for all-day use with
- ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS

Composite Decking, Wood Decking, Cement Board, Sheathing to Steel, Metal Framing

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment

SG4100



- · High-speed motor designed for drywall applications
- Industrial-grade metal gear housing designed to sustain
- heavy usage Great for all-day use with ergonomic, lightweight and
- compact design Trigger lock for continuous
- operation Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Cement Board

SECONDARY APPLICATIONS

Wood Decking

Nosepieces and drive bits for every application:

drywall, wood, metal and metal channel.



Product Reference Chart

TOOL SPECS	SG2510	SG4100
Speed (RPM)	0-2500	0-4000
Current (Amps)	6.5	6.5
Weight	3.6 lbs (1.6 kg)	3.4 lbs (1.5 kg)
Height	7.5" (191 mm)	7.5" (191 mm)
Length	12.5" (318 mm)	12" (305 mm)
Width	2.5" (64 mm)	2.5" (64 mm)
Warranty	5 yr	5 yr
TOOL FEATURES		
Depth-of-Drive	Yes	Yes
Belt Hook	Yes	Yes
Trigger	Variable with Lock	Variable with Lock
Power Type	Corded	Corded
Reversible	Yes	Yes

7

Drywa	all to \	Wood Screv	NS		
Sharp po	oint drywa	II screws for fastenin	g interior drywall to	wood	
Finish:		None			
Gray Ph	osphate	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	0000000	-	
		#2 Phillips	Bugle	Sharp	
Gauge	Length	Thread	Quantity	Item Code	
6	11⁄4″	Coarse	1000 Tub	06A125P	
6	11/4"	Coarse	4000 Box	06A125PB	
6 6	15%" 15%"	Coarse Coarse	1000 Tub 4000 Box	06A162P 06A162PB	
7	2"	Coarse	1000 Tub	07A200P	
8	2½"	Coarse	1000 Box	08A250PK	
Finish: Exterio	r	-111111111111			
Gauge	Length	Thread	Quantity	Item Code	
6	15⁄8″	Coarse	1000 Tub	06A162W	
Drvwa	all to I	Light Steel	Screws		
Sharp po	oint, doubl	e thread drywall scr		terior drywall to	
	uge metal	studs		100	
Finish: Gray Ph	osphate	Zummm	WWWW	ES	
		#2 Phillips	Bugle	Sharp	
Gauge	Length	Thread	Quantity	Item Code	
6	1¼″	Double Thread	1000 Tub	06B125P*	
6	1¼″	Double Thread	4000 Box	06B125PB*	
6	15%"	Double Thread	1000 Tub	06B162P*	
6 6	15%" 2"	Double Thread Double Thread	4000 Box 4000 Box	06B162PB* 06B200PB*	
		Heavy Stee			
		h self-drilling point to heavy-gauge met		ll or	
Finish: Clear Zi	nc			ES	
		+ #2 Phillips	Bugle	Drill	
Gauge	Length	Thread	Quantity	Item Code	
6	1¼″	Fine	4000 Box	06C125CB*	
6	15⁄8″	Fine	4000 Box	06C162CB*	
6	2"	Fine	4000 Box	06C200CB*	
Finish: Exterio		Dummun	mmmə	ES	
Gauge	Length	Thread	Quantity	Item Code	
6	11⁄4″	Fine	1000 Box	06C125WK*	
6 8	15%" 3″	Fine	1000 Box	06C162WK*	
Finish:	osphate	3/3 Fine		08C300WK	
Gauge	Length	Thread	Quantity	Item Code	
6	1¼"	Fine	4000 Box	06C125PB*	
6	15%"	Fine	4000 Box 4000 Box	06C162PB*	
6	2"	Fine	4000 Box	06C200PB*	
ICC —		*ICC certifi	ed test data ava	ilable on	

C certified test data available on all highlighted items.

Refer to ESR-4826 for details.


Wood to Wood Screws

General	General purpose interior wood screws			
Finish: Yellow 2	Zinc	Dum ta	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
		#2 Square	Flat	Sharp
Gauge	Length	Thread	Quantity	Item Code
8	11⁄2″	Coarse	1000 Tub	08F150Y
8	13⁄4″	⅔ Coarse	1000 Tub	08F175Y
8	2"	⅔ Coarse	1000 Tub	08F200Y
8	21/2"	⅔ Coarse	800 Tub	08F250Y
8	2½" 3"	⅔ Coarse ⅔ Coarse	1000 Box 800 Tub	08F250YK 08F300Y
Finish: Yellow 2	Finish: Yellow Zinc () #2 Square () Flat () Type 17			
Gauge	Length	Thread	Quantity	Item Code
8	13/4"	Coarse	4000 Box	08L175YB
Finish: Clear Zi	nc	#2 Square Flat Head Flat Head		
Gauge	Length	Thread	Quantity	Item Code
8	11/4"	Coarse	4000 Box	08L125CBLCTS
8 11/2" Coarse 4000 Box 08L125CBLC1S Interior wood screws for harder-engineered lumber and flooring materials				
	ing mater	DINOUNDUNUUUUUUUUUUUUUUUUUUU		
Finish: Yellow 2		Dannunnun	unannyanan an	
		#2 Square	Trim Head + Nibs	Sharp
			Trim Head	B
Yellow 2	Zinc	#2 Square	Trim Head + Nibs	Sharp
Yellow 2 Gauge 8	Zinc Length 2"	#2 Square Thread	Guantity 4000 Box	Sharp Item Code
Yellow 2 Gauge 8	Zinc Length 2" purpose in	#2 Square Thread High Low	Guantity 4000 Box	Sharp Item Code
Yellow 2 Gauge 8 General Finish:	Zinc Length 2" purpose in	#2 Square Thread High Low	Guantity 4000 Box	Sharp Item Code
Yellow 2 Gauge 8 General Finish:	Zinc Length 2" purpose in	#2 Square Thread High Low terior wood screws a	Trim Head + Nibs Quantity 4000 Box and subfloors	Sharp item Code 08F200YBTHSS
Yellow 2 Gauge 8 General Finish: Yellow 2	Zinc Length 2" purpose in Zinc	#2 Square Thread High Low terior wood screws a	Trim Head • Nibs Quantity 4000 Box and subfloors • Util Util Util • Flat	Sharp Item Code 08F200YBTHSS
Yellow 2 Gauge 8 General Finish: Yellow 2 Gauge	Zinc Length 2" purpose in Zinc Length	#2 Square Thread High Low terior wood screws a Rex Thread	Trim Head Quantity 4000 Box and subfloors Item (International Content of the second content of th	Sharp Item Code 08F200YBTHSS 08F200YBTHSS Type 17 Item Code

08F175YTK Double Thread Subfloor Screw

• Type 17 point and double thread design reduces installation time while improving holding power

- Our Rex drive provides smooth engagement with high torque transmitting capability
- Flathead for stronger holding power

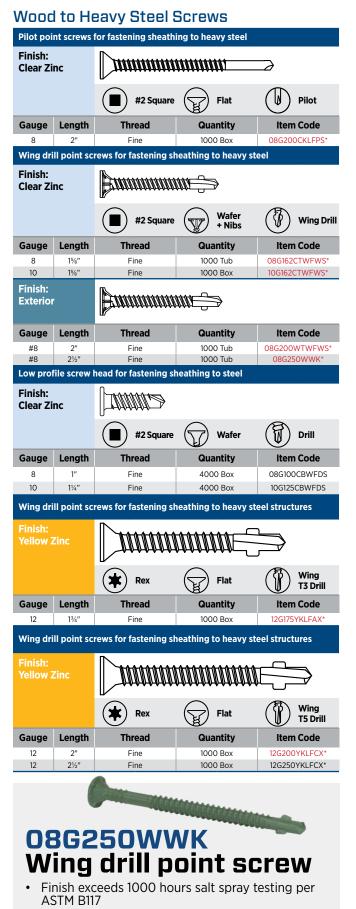

Wood to Light Steel Screws

Sharp po	Sharp point screws for fastening sheathing to light steel			
Finish: Clear Zinc				
		#2 Square Flat Sharp		
Gauge	Length	Thread	Quantity	Item Code
8	1½″	Double	1000 Tub	08G150CTLDSS
Ceme	ent Board Screws			
Screws f	Screws for fastening cement board or Hardie® board to wood			
Finish: Exterior	r			

		#2 Square	Wafer + Nibs	Spoon
Gauge	Length	Thread	Quantity	Item Code
8	11⁄4"	High Low	1000 Tub	08T125W
8	2″	High Low	1000 Tub	08T200W
Screws f	or fastenir	ng cement board or H	Hardie® board to ste	el studs
Finish: Exterior		<u> Ennunnun</u>	CINNNNNN S	
		#2 Square	Wafer + Nibs	Drill
Gauge	Length	Thread	Quantity	Item Code

Decking and Dock Screws

Fine

11/2"

8

Exterior wood screws for projects such as decks, tile roofing, fencing, siding and docks

4000 Box

08T150WBWFDS

Finish: Exterior		Dum 1	11111111	1 400
		#2 Square	Flat	Type 17
Gauge	Length	Thread	Quantity	Item Code
8	13⁄4″	⅔ Coarse	1000 Tub	08D175W
8	2"	⅔ Coarse	1000 Tub	08D200W**
8	21⁄2″	⅔ Coarse	800 Tub	08D250W**
8	21/2"	⅔ Coarse	1000 Box	08D250WK**
8	3"	⅔ Coarse	800 Tub	08D300W**
8	3"	⅔ Coarse	1000 Box	08D300WK**
Finish: Stainles	is 304		UIUUUU	(A)

Gauge	Length	Thread	Quantity	Item Code
8	21/2"	⅔ Coarse	800 Tub	08D250S
9	3"	⅔ Coarse	800 Tub	09D300S

Underlayment Wood to Wood Screws

LISTED

** Approved for use in Miami-Dade County FL.

Finish: Gray Ph	osphate	Sommer and the second			
		+ #2 Phillips	Trim Head + Nibs	Sharp	
Gauge	Length	Thread	Quantity	Item Code	
7	1″	High Low	4000 Box	07Q100PB	
Gray Ph	osphate	#2 Square			
7	11⁄4″	High Low	4000 Box	07Q125PBQ	
MIAM	MIAMI-DADE COUNTY				

Refer to ESR-4826 for details

Metal to Metal Screws


COULT					
Trim hea	d screws f	for fastening compo	site decking to woo	bd	
Finish: Exterior		Dun verereres			
		#2 Square	#2 Square Trim Type 17		
Gauge	Length	Thread	Quantity	Item Code	
8	2½″	⅔ Coarse	800 Tub	08R250W	
8	3"	⅔ Coarse	800 Tub	08R300W	
	/ designed er installat	l cup head screws e tion	liminate mushroom	ing around screw	
Finish: Exterio	/Gray	[]	11) - <i>11 11 11 11 11 11 11 1</i>		
		#2 Square	Cupped Pan	Sharp	
Gauge	Length	#2 Square Thread		Sharp Item Code	
Gauge 8	Length		Pan	\bigcirc	
-	21⁄2"	Thread	Quantity	Item Code	
8 Finish:	21⁄2"	Thread	Quantity	Item Code	
8 Finish: Exterior	2½" /Tan	Thread Multi-Thread	Pan Quantity 800 Tub	Item Code 085250W003	
8 Finish: Exterior Gauge 8 Finish:	2½" '/Tan Length	Thread Multi-Thread	Quantity 800 Tub	Item Code 085250W003	
8 Finish: Exterior Gauge 8 Finish:	2½" */Tan Length 2½"	Thread Multi-Thread	Quantity 800 Tub	Item Code 085250W003	
8 Finish: Exterior Gauge 8 Finish: Exterior	2½" '/Tan Length 2½" '/Brown	Thread Multi-Thread	Quantity 800 Tub Quantity 800 Tub Quantity 800 Tub	Item Code 085250W003 Item Code 085250W592	

Composite Decking Screws

ICC ES

*ICC certified test data available on all highlighted items. Refer to ESR-3558 for details.

General	purpose so	crews for fastening r	netal to metal	
Finish: Clear Zi	nc			ES
		#2 Square	Flat Pan	Drill
Gauge	Length	Thread	Quantity	Item Code
10	3⁄4″	Fine	1000 Tub	10M075CTMFDS*
10	1″	Fine	1000 Box	10M100CKMFDS*
Finish: Yellow 2	Zinc	()mms		ES
		Rex	Flat Pan	Drill
Gauge	Length	Thread	Quantity	Item Code
10	3⁄4″	Fine	1000 Tub	10M075YTFFDX*
Finish: Yellow 2	Zinc			ES
		Rex	Flat Pan	T4 Drill
Gauge	Length	Thread	Quantity	Item Code
10	3⁄4″	22 TPI	8000 Loose	10M075YLFT4X*
10	3/4"	22 TPI	1000 Box	10M075YKFT4X*
Finish: Yellow 2	Zinc		⇒	ES
		Rex	Flat Pan	T4 Drill
Gauge	Length	Thread	Quantity	Item Code
12	7⁄8″	Fine	1000 Box	12M087YKFF4X*
Finish: Yellow 2	Zinc		\rightarrow	Es
		Rex	Flat Pan	T3 Drill
Gauge	Length	Thread	Quantity	Item Code

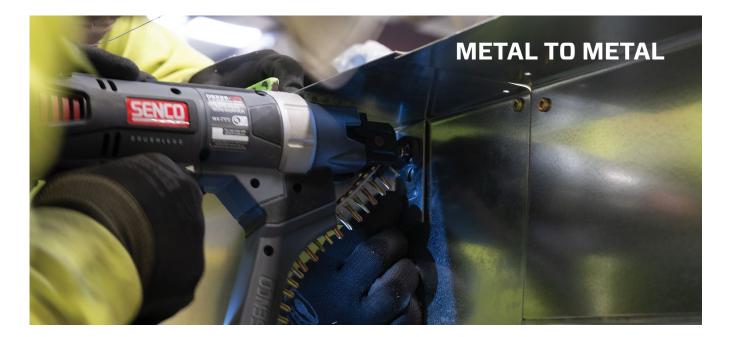

	Low Fromo Framming Corowo				
Self tapping metal framing screw					
Finish: Clear Zinc		().mm		ES	
		#2 Phillips	Mod Truss	Sharp	
Gauge	Length	Thread	Quantity	Item Code	
8	1⁄2″	Fine	1000 Tub	08M050CTRFSP*	
10	3/4"	Fine	1000 Box	10M075CSK	
Self drilling and tapping metal framing screws					
Finish: Clear Zi	nc	(juun)		ES	
	+ #2 Phillips Mod Tru		Mod Truss	Drill	
Gauge	Length	Thread	Quantity	Item Code	
8	1⁄2″	Fine	1000 Tub	08M050CTRFDP*	
10	3/4"	22 TPI	1000 Box	10M075CDK*	
	74				
	,4			A	

Low Profile Framing Screws

10M075CDK 22 TPI Metal Framing Screw

- Low profile head to reduce drywall flexing
- Higher thread count for better fastener engagement

Specialty Screws

	General purpose screws for a range of applications including window installation and crating					
Finish: Clear Zi	nc		\rightarrow			
		#2 Square	Round Washer	Type 17		
Gauge	Length	Thread	Quantity	Item Code		
8	11⁄4″	Coarse	4000 Box	08X125CBACTS		
Finish: Clear Zi	nc			ES		
		#2 Square	Round Washer	Drill		
Gauge	Length	Thread	Quantity	Item Code		
8	11⁄4″	Double	1000 Box	08X125CKADDS*		
8	2″	Double	1000 Box	08X200CKADDS*		
Finish: Clear Zi	nc					
		#2 Square	Pan Framing	Sharp		
Gauge	Length	Thread	Quantity	Item Code		
8	1″	Double	4000 BOX	08M100CBPDSS		



SCREW SYSTEM ACCESSORIES

Bits for Current Tools						
Integrated auto	o-feed screwd	river — 2 or 25 k	oits per pack*			
Bits Fit			ITEM #	000		
DS222-18V DS225-18V DS242-AC DS245-AC	EA0297 EA0297N*	EA0298 EA0298N*	EA0299 EA0299N*			
DS322-18V DS342-AC	EA0400	EA0401	EA0402			
Auto-feed atta	chments and k	its — 2 or 25 bi	ts per pack*			
Bits Fit						
DS230	EA0300	EA0301 EA0301N*	EA0302			
DS530 DS532-AC DS534-AC	EA0314	EA0315 EA0315N*	EA0316 EA0316N*			
For PAMFast au	ito-feed screw	system — 25 bi	ts per pack	100		
Bits Fit			ITEM #			
1"-3" Models	-	EA0396P	EA0397P			
*25 count high to	orque bits for u	ise in metal appl	ications			

Bit Tip

Loose screwdriver — 10 bits per pack					
Bits Fit	ITEM #	A			
SG2510 SG4100	EA0308				

DS530 Series Adapters

For attaching	For attaching screwdrivers to DS530 attachments					
Screwdriver	Fits To	ools	Adapter ITEM #	580187		
SENCO	SG2510	SG4100	MB0184			
DeWalt	DW252 DW253 DW255 DW257	DW266 DW272 DW276	MB0185	0		
	DCF624		MB0183	000102		
MAKITA	FS2200 FS2500 FS4200 FS6200	XSF03 XSF04 XSF05	MB0186			
	FS2701		MB0187			

Bits for Retired Tools

-						
Integrated auto	Integrated auto-feed screwdriver — 2 bits per pack					
Bits Fit			ITEM #			
DS232-AC DS235-AC DS212-18V DS215-18V	EA0297	EA0298	EA0299			
DS332-AC DS312-18V	EA0300	EA0301	EA0302			
DS425-AC DS440-AC	EA0314	EA0315	EA0316			
When attaching	g to SG2510, SG4100	and Makita with ADF	019 & MB0174			
Bits Fit			ITEM #			
DS220	EA0311	EA0312	EA0313			
DS320	EA0314	EA0315	EA0316			
When attaching	When attaching to DeWalt with ADP009					
Bits Fit			ITEM #			
DS220	EA0317	EA0318	EA0319			
DS320	EA0320	EA0321	EA0322			

DS220 and DS320 Adapters

For attaching screwdrivers to DS220 and DS320 attachments					
Screwdriver	Fits To	ools	Adapter ITEM #		
SENCO	SG2510	SG4100	MB0173		
DeWalt	DW252 DW253 DW255 DW257	DW266 DW272 DW276	ADP009		
MAKITA	FS2200 FS2500 FS4200 FS6200	XSF03 XSF04 XSF05	ADP019		
	FS2701		MB0174		

SCREW SYSTEM ACCESSORIES

Nosepieces for Current and Retired Tools

For wood applic	ations			For metal framing	applicati	ons	
Fits Tools	Range	ITEM #		Fits Tools	Range	ITEM #	
DS220 DS230 Series DS222-18V DS225-18V DS242-AC DS245-AC	1″–2″	FB0157		DS220 DS230 Series DS222-18V DS225-18V DS242-AC DS245-AC	½″- 1 ″	FB0155	
DS320 DS322-18V DS342-AC DS425AC DS440AC DS530 Series DS532-AC DS534-AC	1″–3″	FB0159		DS320 DS322-18V DS342-AC DS425AC DS440AC DS530 Series DS532-AC DS534-AC	1⁄2″-1″	FB0187	
For drywall appl	ications			DS220 DS230 Series			
Fits Tools	Range	ITEM #		DS222-18V DS225-18V	1⁄2″-1″	FC0822*	
				DS242-AC DS245-AC			
DS220	1″–2″	FC0878	۲. او او ا	DS320 DS322-18V DS342-AC			
DS320 DS425AC DS440AC	1″–3″	FC0895		DS425AC DS440AC DS530 Series DS532-AC DS534-AC	1⁄2″-1″	FC0887*	L

For general appli	cations	
Fits Tools	Range	ITEM #
DS220 DS230 Series DS222-18V DS225-18V DS242-AC DS245-AC	1"-2"	FC1022
DS320 DS322-18V DS342-AC DS425AC DS440AC DS530 Series DS532-AC DS534-AC	1"-3"	FC1023

SCREW SYSTEM ACCESSORIES

*Not recommended for screws exceeding 1"

Replacement Pads

For use on nosepieces				
Fits Nosepieces	Description	Qty.	ITEM #	
FC0822, FC0887	Round no-mar pad with adhesive	3	FC0983	
FB0157, FB0159	Square non-skid pad with adhesive	3	FA0334	
FC1022, FC1023	No-mar pad with clip	1	HA0332	

THE DIFFERENCE IS IN THE DETAILS

Experience award-winning cordless convenience in all-day, everyday trim tools.

APPLICATIONS

Finish and trim, fine woodworking, cabinet, furniture, decorative trim

KEY FEATURES

- FUSION[®] cordless air-power technology
- Selectable drive switch allows for contact or sequential trigger actuation
- Nose-mounted LED light
- Adjustable belt hook
- Thumbwheel depth-of-drive
- EZ-Clear[™] feature for quickly clearing jams
- Includes storage bag, battery and charger

SENCO has set the industry standard for pneumatic finish and fine woodworking tools, providing compact, ultra-light, easy-to-use tools designed for precision and longevity.

We offer a broader range of tools than anyone else, covering 15–23 gauge nailers and 16–19 gauge staplers, including the industry benchmark FinishPro®42XP.

APPLICATIONS

Cabinetry, furniture, decorative trim, crown molding, custom woodworking applications and all other finish needs

KEY FEATURES

- EZ-Clear[™] latch to clear jams fast
- No-mar pads to protect woodwork
- Clear line-of-sight for precision fastening
- Comfort grip
- · Adjustable depth-of-drive



F-18XP

21/8" 18 GA. CORDLESS PNEUMATIC BRAD NAILER

ITEM #10M0001N



Features

- FUSION[®] cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-15XP

21/2" 15 GA.CORDLESS PNEUMATIC FINISH NAILER

ITEM #10L0001N



Features

- FUSION[®] cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-16XP

2¹/₂" 16 GA. CORDLESS PNEUMATIC FINISH NAILER

TIEM #IUNUUUIN



Features

- FUSION® cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-LXP

1 $\frac{1}{2}$ " 18 GA. $\frac{1}{4}$ " CROWN CORDLESS PNEUMATIC FINISH STAPLER

ITEM #10Y0001N



Features

- FUSION[®] cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

Product Reference Chart

i loudot licitii chot				
TOOL SPECS	F-18XP	F-16XP	F-15XP	F-LXP
Weight with Battery	6.6 lbs (3.0 kg)	6.7 lbs (3.1 kg)	6.8 lbs (3.1 kg)	6.8 lbs (3.1 kg)
Height	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)
Length	10.2" (259 mm)	11.6" (295 mm)	12.6" (320 mm)	10.4" (264 mm)
Width	3.9" (99 mm)	3.9" (99 mm)	5.3" (135 mm)	3.9" (99 mm)
Charge Time		80% in 15 minutes,	100% in 45 minutes	
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are located	d on pages 23-25, 27	
Gauge, Gauge/Crown	18	16	15	18/¼″
Range	⁵ /8″-2 ¹ /8″	³ / ₄ "-2 ¹ / ₂ "	1½"-2½"	³ / ₈ "-1 ¹ / ₂ "
Capacity	110	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	34° Angled Taped Strip	Straight Glued Strip
Series	AY, AX	MO	DA	L
TOOL FEATURES				
Jam Reduction Intelligence	Yes	Yes	Yes	Yes
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
EZ-Clear™ Jam Clearing	No	No	Yes	No
Trigger Actuation	Sequential or Contact	Sequential or Contact	Sequential or Contact	Sequential or Contact
Nose Mounted LED Light	Yes	Yes	Yes	Yes
Belt Hook	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible

16.4

TN11G1 1%" HEADLESS PINNER



Features


- NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- Reversible belt hook
- Last nail lockout

TN11L1 2" HEADLESS PINNER



Features

- NEVERLUBE[®] oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- Reversible belt hook
- Last nail lockout

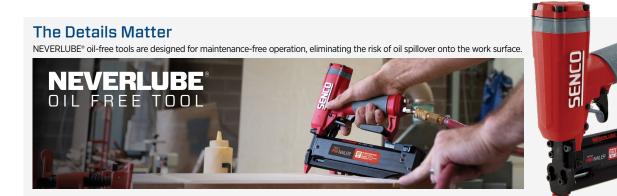



Product Reference Chart

FIDUULLINEIEIEILLE	bonare		
TOOL SPECS	TN11G1	TN11L1	
Trigger	Sequential	Sequential	
Operating Pressure	70-100 psi (4.8-6.9 bar)	70–110 psi (4.8–7.6 bar)	
Air Consumption (60 CPM)	1.1 scfm	1.1 scfm	
Air Inlet	1⁄4″ NPT	1/4" NPT	
Weight	2.41 lbs (1.09 kg)	2.86 lbs (1.3 kg)	
Height	7.8" (198 mm)	9.2" (233 mm)	
Length	8.57" (218 mm)	8.69" (220 mm)	
Width	2.6" (66 mm)	2.6" (66 mm)	
Main Body Material	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are loc	cated on page 23	
Gauge	23	23	
Range	1⁄2"-13⁄8"	1/2"-2"	
Capacity	100	100	
Angle/Collation	Straight Glued Strip	Straight Glued Strip	
Series	A1, CZ	A1, CZ	
TOOL FEATURES			
Depth-of-Drive	No	No	
Belt Hook	Yes	Yes	
NEVERLUBE *	Yes	Yes	
Exhaust	Rear	Rear	



Features

- NEVERLUBE® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- Reversible belt hook
- Last nail lockout

FinishPro®18Mg

21/8" BRAD NAILER

ITEM #1U0021N



Features

- Metal cylinder for increased durability
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Narrow nose for tight corners
- Includes case, swivel air plug and wrench

1" HEADLESS BRAD NAILER

ITEM #8N0001N



Features

- Never-Lube[®] design no lubrication to stain fine woods
- Ergonomic handle for all-day comfort
- Narrow nose for tight corners

FinishPro®18BMg

21/8" BRAD NAILER

18GA



Features

• Oil-free design — no oil required

- Ultra-lightweight for ease of use and maneuverability
- Nose mounted LED light illuminates dark work spaces
- Includes case, swivel air plug and wrench

Product Reference Chart

TOOL SPECS	TN21L1	LS1XP	FinishPro®18Mg	FinishPro®18BMg
Trigger	Sequential	Sequential	Selectable	Selectable
Operating Pressure	70–110 psi (4.8–7.6 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	1.1 scfm	1.92 scfm	2.4 scfm	1.6 scfm
Air Inlet	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT
Weight	3.16 lbs (1.43 kg)	2.9 lbs (1.3 kg)	2.48 lbs (1.12 kg)	2.8 lbs (1.26 kg)
Height	9.2" (233 mm)	8.25" (210 mm)	9.75″ (248 mm)	9.8" (248 mm)
Length	8.76" (222 mm)	9″ (229 mm)	10.5" (267 mm)	10" (255 mm)
Width	2.6" (66 mm)	2" (51 mm)	2.5" (63.5 mm)	2.5″ (63.5 mm)
Main Body Material	Aluminum	Aluminum	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are loca	ted on pages 23-24	
Gauge	21	18	18	18
Range	⁵⁄8″ − 2″	1⁄2‴−1″	5⁄8″-21⁄8″	5⁄8‴-21⁄8″
Capacity	200	100	110	100
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	ZX	AZ	AX	AX
TOOL FEATURES				
Depth-of-Drive	No	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Fixed	Yes	Yes
NEVERLUBE [®] /Oil-Less	NEVERLUBE®	NEVERLUBE®	Oil-Less	Oil-Less
Exhaust	Rear	Fixed	Rear Adjustable	Rear Adjustable

18GA

18

SLP20XP 15/8" BRAD NAILER

ITEM #430101N



Features

FINISH & WOODWORKING

- Never-Lube[®] design no oil required
- Drives both slight and medium headed brads
- Muffler ensures quieter operation
- Includes case

FinishPro®16XP

21/2" FINISH NAILER ITEM #9S0001N



Features

- Redesigned EZ-Clear™ latch for quick and easy jam clearing
- Upgraded magazine feed system for consistent, reliable shot
- performance
- Selectable single fire and bump fire modes
- Tool free depth of drive adjustment

Product Reference Chart

FIDUULLINEIEIEIILE	Sonart		
TOOL SPECS	SLP20XP	FinishPro®25XP	FinishPro®16XP
Trigger	Sequential	Sequential	Selectable
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.22 scfm
Air Inlet	¼″ NPT	1⁄4″ NPT	¼″ NPT
Weight	2.3 lbs (1 kg)	2.7 lbs (1.2 kg)	4.0 lbs (1.8 kg)
Height	8.25" (210 mm)	9.9" (251 mm)	11.4" (290 mm)
Length	9.5″ (241 mm)	9.8" (249 mm)	12" (305 mm)
Width	2" (50.8 mm)	2.2" (56 mm)	4" (102 mm)
Main Body Material	Aluminum	Aluminum	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	F	asteners are located on pages 23-2-	4
Gauge	18	18	16
Range	5⁄8″-15⁄8″	5⁄8″-2½″	11/4"-21/2"
Capacity	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	AX, AY	AX, AY	A4, MO
TOOL FEATURES			
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	No	Yes	Yes
Oil-Less	Yes	Yes	No
Exhaust	Fixed	Adjustable	Adjustable

FinishPro[®]25XP

2¹/₈" BRAD NAILER

ITEM #760102N

18

16



Features

- Never-Lube[®] design no oil required
- Drives both slight and medium headed brads
- Powerful ensures complete drives into hard substrates
- Includes case

FinishPro®30XP

2" ANGLED FINISH NAILER

ITEM #9P0002N



Features

- Never-Lube[®] design no oil required
- EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Adjustable depth of drive
- Includes case and belt hook

FinishPro®42XP

21/2" ANGLED FINISH NAILER

ITEM #4G0001N



Features

- Never-Lube $^{\circ}$ design no oil required
- EZ-Clear $\ensuremath{^{\text{\tiny M}}}$ latch virtually eliminates downtime caused by fastener jams
- High-strength driver with threaded connection
- Metal cylinder for increased durabilityIncludes case, belt hook and contact trigger kit
- Includes case, beit nook and contact trigger kil

Product Reference Chart

FinishPro®35Mg 2½" ANGLED FINISH NAILER

Z/2 ANGLEDTINISITIAL

ITEM #6G0001N

15.





- EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams
- Integrated air blower clears debris from work surface
- Metal cylinder for increased durability
- Includes case, swivel air plug and wrench

FINISH & WOODWORKING

i ouuot nererenee	onare		
TOOL SPECS	FinishPro®30XP	FinishPro®35Mg	FinishPro®42XP
Trigger	Sequential	Selectable	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8-8.3 bar)
Air Consumption (60 CPM)	2.16 scfm	3.2 scfm	3.87 scfm
Air Inlet	¼″ NPT	¼″ NPT	¼″ NPT
Weight	3.8 lbs (1.73 kg)	4.2 lbs (1.9 kg)	4.7 lbs (2.1 kg)
Height	9.63" (244.6 mm)	12.25" (311 mm)	11.25" (286 mm)
Length	12" (305 mm)	13" (330 mm)	13" (330 mm)
Width	3.25" (82.5 mm)	3.5" (89 mm)	3.5" (89 mm)
Main Body Material	Magnesium	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are located on page 25	
Gauge	15	15	15
Range	1"-2"	11⁄4″-21⁄2″	1¼"-2½"
Capacity	104	110	104
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	34° Angled Tape Strip
Series	DA	DA	DA
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Yes	Yes
Oil-Less	Yes	Yes	Yes
Exhaust	Fixed	Adjustable	Adjustable

SLS20XP

3/16", 1/4", 3/8" CROWNS, 11/2" FINE/MEDIUM WIRE STAPLER

SEE ITEM # CHART **19**GA **18**G SENCO

Features

- Never-Lube[®] design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Muffler ensures quieter operation

SLS25XP

1/4", 3/8" CROWNS, 11/2" MEDIUM WIRE STAPLER

SEE ITEM # CHART

Features

- Never-Lube® design no oil required
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Muffler ensures quieter operation

SKSXP

Features

• EZ-Clear[™] latch virtually eliminates downtime caused by fastener jams



SLS20XP, SLS25XP and SKSXP Item Code Chart

Model	Crown	ltem Code
SLS20XP-K	1⁄4″	490101N
SLS20XP-L	1⁄4″	490103N
SLS20XP-L W/CASE	1⁄4″	490105N
SLS20XP-L SENCOMATIC	1⁄4″	490015N
SLS20XP-M	3⁄8″	490107N
SLS20XP-R	³ ⁄16″	490111N
SLS25XP-L	1⁄4″	820103N
SLS25XP-M	3⁄8″	820107N
SKSXP-L	1⁄4″	300120N
SKSXP-M	3/8"	300152N
SKSXP-N	⁷ ⁄16″	300184N

20

• Never-Lube[®] design - no oil required

• Long 1" lip to get into tight spots

Product Reference Chart								
TOOL SPECS	SLS20XP	SLS25XP	SKSXP					
Trigger	Sequential	Contact	Sequential					
Operating Pressure	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8–8.3 bar)	70-120 psi (4.8-8.3 bar)					
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.16 scfm					
Air Inlet	1⁄4" NPT	1/4" NPT	¼″ NPT					
Weight	2.5 lbs (1.13 kg)	2.67 lbs (1.21 kg)	4.2 lbs (1.9 kg)					
Height	8.5″ (216 mm)	9″ (229 mm)	9.25″ (238 mm)					
Length	12" (305 mm)	12" (305 mm)	12.38" (314 mm)					
Width	2" (50.8 mm)	2" (50.8 mm)	3" (76 mm)					
Main Body Material	Aluminum	Aluminum	Aluminum					
Warranty	5 yrs	5 yrs	5 yrs					
FASTENER SPECS	F	asteners are located on pages 26-2	8					
Gauge	19, 18	18	18, 16					
Crown	3/16", 1/4", 3/8"	1⁄4", 3⁄8"	1/4", 3/8", 7/16"					
Range	³ ⁄8″-1 ¹ ⁄2″	3⁄8″-11⁄2″	3⁄4''-11⁄2''					
Capacity	168	168	145					
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip					
Series	K, L, M, R	L, M	L, M, N					
TOOL FEATURES								
Depth-of-Drive	Yes	Yes	No					
Belt Hook	No	No	No					
Oil-Less	Yes	Yes	Yes					

SLS150Mg ¼" CROWN, 1%6" MEDIUM WIRE STAPLER

ITEM #8C0001N



Features

- Ultra-lightweight for ease of use and maneuverability
- Nose-mounted LED light illuminates work surface
- Durable composite magazine
- Reload indicator on magazine
- Includes case and wrench

SLS18Mg ¼" CROWN, 1½" MEDIUM WIRE STAPLER

ITEM #1W0021N

18



Features

- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Reload indicator on magazine
- Includes case, swivel air plug and wrench

Product Reference Chart

i louust nerei ener	5 Ghart		
TOOL SPECS	SLS150Mg	SLS18Mg	
Trigger	Selectable	Selectable	
Operating Pressure	70-120 psi (4.8-8.3 bar)	70-120 psi (4.8-8.3 bar)	
Air Consumption (60 CPM)	2.4 scfm	2.4 scfm	
Air Inlet	½″ NPT	1⁄4" NPT	
Weight	2.6 lbs (1.8 kg)	2.6 lbs (1.8 kg)	
Height	9.5″ (241 mm)	9.5″ (241 mm)	
Length	10.25" (260 mm)	10.25" (260 mm)	
Width	2.5" (63.5 mm)	2.5" (63.5 mm)	
Main Body Material	Magnesium	Magnesium	
Warranty	5 yrs	5 yrs	
FASTENER SPECS	Fasteners are loc	cated on page 27	
Gauge	18	18	
Crown	1⁄4"	1/4"	
Range	1⁄2‴-19⁄16″	³ / ₈ "-1 ¹ / ₂ "	
Capacity	110	110	
Angle/Collation	Straight Glued & Taped Strip	Straight Glued & Taped Strip	
Series	L	L	
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	
Belt Hook	Yes	Yes	
Oil-Less	Yes	Yes	

18GA

SC1XP Senclamp® %" CROWN, %" SENCLAMP® FASTENER

ITEM #220101N



Features

FINISH & WOODWORKING

- Senclamp® fasteners pull the joint together during driving for a tight, permanent fit
- Eliminates milling, doweling, clamping, screwing and other time-consuming, cost-adding operations
- The Senclamp high-carbon steel fastener derives added strength from its special webbed design

SC2 Sencor[®] 1" CROWN, ½" CORRUGATED STAPLER

ITEM #470001N

25_G



Features


- Powerful ensures complete drives into hard substrates
- Eliminates gluing, milling, doweling, screwing and clamping
- Added strength for larger butt joints

Product Reference Chart

	Shart			
TOOL SPECS	SC1XP Senclamp®	SC2 Sencor®		
Trigger	Sequential	Sequential		
Operating Pressure	80–110 psi (5.5–7.5 bar)	80–110 psi (5.5–7.5 bar)		
Air Consumption (60 CPM)	3.8 scfm	3.7 scfm		
Air Inlet	3⁄8″ NPT	3∕8″ NPT		
Weight	6.3 lbs (2.8 kg)	6.9 lbs (3.1 kg)		
Height	9.8″ (249 mm)	9.44" (240 mm)		
Length	12.7" (322 mm)	12.5" (318 mm)		
Width	2.5" (63.5 mm)	2" (50.8 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are loc	cated on page 29		
Gauge	25	25		
Crown	7/16″	1"		
Range	⁵ / ₁₆ "- ⁹ / ₁₆ "	1/4"-1/2"		
Capacity	120	80		
Angle/Collation	Straight Glued & Taped Strip	Straight Glued Strip		
Series	Y	Х		
TOOL FEATURES				
Depth-of-Drive	No	No		
Belt Hook	No	No		
Oil-Less	No	No		

FINISH & WOODWORKING FASTENERS

23 Headless Straight Strip Pins										
Pins fasten the smallest of trim securely leaving a nearly invisible hole										
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
1/2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ08EAAN			
5⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ10EAA			
5⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ10EAAN			
3⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ11EAA			
3⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ11EAAN			
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ13EAA			
11⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ15EAA			
13⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ16EAA			
1½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ17EAA			
2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ21EAA			
1/2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100509			
5⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100629			
3⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100759			
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101009			
1¼″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101259			
13⁄8″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101379			
11⁄2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101509			
2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A102009			
1⁄2‴-1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109809*			
1"-2"	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109909*			



CS-Clamshell, *Variety Pack

²¹^{6A} Medium Straight Strip Head Pins

21 gauge pins offer significantly more holding power than 23 gauge pins while leaving a much smaller indent than an 18 gauge brad								
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code	
5⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX10EAA	
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX13EAA	
13⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX16EAA	
15⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX18EAA	
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX21EAA	


CS-Clamshell

8_{G/}


Straight Strip Brad Nails

Cabinet	Cabinets, decorative trim, picture frames and molding									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
5⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX10EAA			
3⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX11EAA			
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX13EAA			
1¼″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX15EAA			
11⁄2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX17EAA			
15⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX18EAA			
13⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX19EAA			
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX21EAAN			
21⁄8″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX22EAAN			
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201009			
11⁄4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201259			
1½″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A201509			
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A202009			
⁵ /8″-1 ¹ /4″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209809*			
1-2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209909*			

CS-Clamshell, *Variety Pack









18 Headless and Slight Head Brad Nails

Cabinets,	Cabinets, decorative trim, picture frames and molding									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
1⁄2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ08EAA			
3⁄4″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ11EAA			
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ13EAA			
5⁄8″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY10EAA			
3⁄4″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY11EAA			
1″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY13EAA			




16^{GA} Straight Strip Finish Nails

	Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels									
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code			
3⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M	M001000			
1″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001001			
11⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001002			
11⁄2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001003			
13⁄4″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001004			
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001005			
21/2"	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001007			
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402009			
CS-Clamsh	CS-Clamshell, PT-Plastic Tub									



Angled Strip Finish Nails

Furnitur	Furniture and cabinets, molding and trim, baseboard, chair rails, doors and window casings								
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code		
1″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA13EPBN		
11⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA15EPBN		
11⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA17EPBN		
13⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA19EPBN		
2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA21EPBN		
2¼″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA23EPBN		
2½″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	3M	DA25EPB		
11⁄2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301500		
13⁄4″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301750		
2″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302000		
2½″	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302500		
1¼″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA15EABN		
11⁄2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA17EABN		
13⁄4″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA19EABN		
2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA21EABN		
2½″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	3M	DA25EAB		
2″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302009		
2½″	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302509		
2″	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	2M	DA21EGBN		
2½″	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	1.2M	DA25EGB		
1¼″	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA15AIA		
11⁄2″	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA17AIA		
13⁄4″	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA19AIA		

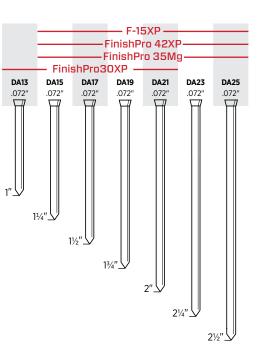

CS-Clamshell

*Hardened regular galvanized heat treated 15 Gauge for steel stud and trim applications

The Best Finish Nails in the Business.

SENCO® has the finish nails to meet all your finish and trim needs. In addition to offering a wide variety of fastener ranges and gauges, we provide a full line of tools to drive them.





25

FINISH & WOODWORKING FASTENERS


19_{ca} ½" Crown Medium Wire Staples

Cabinets, drawers, soffits, lattice, casebacks							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
3/4"	Chisel	Galv	Sencote	Glued	10M	K11BAB	
7⁄8″	Chisel	Galv	Sencote	Glued	5M	K12BAB	
1″	Chisel	Galv	Sencote	Glued	5M	K13BABN	




19_{GA} _{3/16}" Crown Medium Wire Staples


Cabinets, drawers, lattice, laminated hardwood flooring						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1⁄2″	Blunt	Galv	Sencote	Glued	10M	R08BAB
5⁄8″	Blunt	Galv	Sencote	Glued	5M	R10BAB
3⁄4″	Blunt	Galv	Sencote	Glued	5M	R11BAB
1″	Blunt	Galv	Sencote	Glued	5M	R13BAB



18 Jan 14" Crown Medium Wire Staples								
Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and insulation sheathing								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
3⁄4″	Chisel	Bright	Sencote	Glued	5M	L11BRB		
1″	Chisel	Bright	Sencote	Glued	5M	L13BRBN		
1″	Chisel	Bright	Sencote	Glued	40M	L13BRBP		
11⁄8″	Chisel	Bright	Sencote	Glued	5M	L14BRB		
11⁄4″	Chisel	Bright	Sencote	Glued	5M	L15BRB		
3⁄8″	Chisel	Galv	Sencote	Glued	10M	L06BAB		
%16″	Chisel	Galv	Sencote	Glued	24M	L07BABP		
1⁄2″	Chisel	Galv	Sencote	Glued	10M	L08BAB		
5⁄8″	Chisel	Galv	Sencote	Glued	5M	L10BABN		
5⁄8″	Cross Cut	Galv	Sencote	Glued	5M	L10HABN		
3⁄4″	Chisel	Galv	Sencote	Glued	5M	L11BAB		
3⁄4″	Cross Cut	Galv ¹	Sencote	Glued	5M	L11HBB		
3⁄4″	Cross Cut	Galv	Sencote	Glued	5M	L11HAB		
7⁄8″	Chisel	Galv	Sencote	Glued	5M	L12BAB		
7⁄8″	Chisel	Galv	Sencote	Glued	5M	L12BQB		
1″	Chisel	Galv	Sencote	Glued	5M	L13BABN		
1″	Cross Cut	Galv	Sencote	Glued	5M	L13HABN		
11⁄8″	Chisel	Galv	Sencote	Glued	5M	L14BAB		
1¼″	Chisel	Galv	Sencote	Glued	5M	L15BAB		
11⁄2″	Chisel	Galv	Sencote	Glued	5M	L17BAB		
5⁄8″	Chisel	Galv	Sencote	Glued	1.2M (CS)	A800629		
3⁄4″	Chisel	Galv	Sencote	Glued	0.9M (CS)	A800759		
1″	Chisel	Galv	Sencote	Glued	0.9M (CS)	A801009		
11⁄4″	Chisel	Galv	Sencote	Glued	0.7M (CS)	A801259		
11⁄2″	Chisel	Galv	Sencote	Glued	0.6M (CS)	A801509		
1⁄2″-11⁄2″	Chisel	Galv	Sencote	Glued	0.9M (CS)	A809909*		
5⁄8″	Chisel	Stainless 304 ²	Plain	Glued	5M	L10BHA		
3⁄4″	Chisel	Stainless 304	Plain	Glued	5M	L11BGA		
11⁄8″	Chisel	Stainless 304	Plain	Glued	5M	L14BGA		

CS-Clamshell, *Variety Pack







FINISH & WOODWORKING FASTENERS

27

18^{6A} _{3/8}" Crown Medium Wire Staples


Cabinets	Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing							
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5⁄8″	Chisel	Bright	Sencote	Glued	5M	M10BRBN		
3⁄4″	Chisel	Bright	Sencote	Glued	5M	M11BRBN		
1″	Chisel	Bright	Sencote	Glued	5M	M13BRB		
3⁄8″	Chisel	Galv	Sencote	Glued	10M	M06BABN		
1⁄2″	Chisel	Galv	Sencote	Glued	10M	M08BAB		
5⁄8″	Chisel	Galv	Sencote	Glued	5M	M10BABN		
3⁄4″	Chisel	Galv	Sencote	Glued	5M	M11BABN		
7⁄8″	Chisel	Galv	Sencote	Glued	5M	M12BAB		
1″	Chisel	Galv	Sencote	Glued	5M	M13BAB		
1¼″	Chisel	Galv	Sencote	Glued	10M	M15BAB		
11⁄2″	Chisel	Galv	Sencote	Glued	10M	M17BAB		






16 7/16" Crown Heavy Wire Staples

Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
3⁄4″	Chisel	Bright	Sencote	Glued	5M	N11BRB
1″	Chisel	Bright	Sencote	Glued	5M	N13BRB
11⁄8″	Chisel	Bright	Sencote	Taped	10M	N14BRB
1¼″	Chisel	Bright	Sencote	Taped	10M	N15BRB
13⁄8″	Chisel	Bright	Sencote	Taped	10M	N16BRB
11⁄2″	Chisel	Bright	Sencote	Taped	10M	N17BRB
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB
13⁄4″	Chisel	Bright	Sencote	Taped	10M	N19BRB
2″	Chisel	Bright	Sencote	Taped	10M	N21BRB
1⁄2″	Chisel	Galv	Sencote	Taped	5M	N08BABN
1⁄2″	Chisel	Galv*	Sencote	Glued	5M	N08BBBN
1⁄2″	Diverg	Galv*	Sencote	Glued	5M	N08FBB
5⁄8″	Chisel	Galv	Sencote	Glued	5M	N10BAB
3⁄4″	Chisel	Galv	Sencote	Glued	5M	N11BAB
³ ⁄4″	Diverg	Galv*	Sencote	Glued	5M	N11FBB
7⁄8″	Chisel	Galv	Sencote	Glued	5M	N12BABN
7⁄8″	Diverg	Galv	Sencote	Glued	5M	N12FABN
1″	Chisel	Galv	Sencote	Glued	5M	N13BAB
1″	Diverg	Galv	Sencote	Glued	5M	N13FAB
11⁄8″	Chisel	Galv	Sencote	Taped	10M	N14BAB
1¼″	Chisel	Galv	Sencote	Taped	10M	N15BAB
1¼″	Diverg	Galv	Sencote	Glued	10M	N15FAB
13⁄8″	Chisel	Galv	Sencote	Taped	10M	N16BAB
11⁄2″	Chisel	Galv	Sencote	Taped	10M	N17BAB
15⁄8″	Chisel	Galv	Sencote	Taped	10M	N18BAB
13⁄4″	Chisel	Galv	Sencote	Taped	10M	N19BAB
2″	Chisel	Galv	Sencote	Taped	10M	N21BAB
1¼″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB
11⁄2″	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB
13⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN
2″	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN






28

*Galvanized High Tensile

FINISH & WOODWORKING FASTENERS

25 ga	Sencor® 1" Crown Corrugated Fastener	

Butt and r	Butt and miter joints					
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1⁄4″	Sharp Chisel	Bright	Plain	Glued	8M	X04NRA
³ ⁄8″	Sharp Chisel	Bright	Plain	Glued	5M	X06NRA
1⁄2″	Sharp Chisel	Bright	Plain	Glued	4M	X08NRA



SENCOR® CORRUGATED FASTENERS


Sencor corrugated fasteners provide twice the joint strength of ordinary fasteners. Available in 1" crown and ¼", ¾" and ½" lengths to ensure maximum joint strength. Use this fastener for butt and miter joints, truss construction, wooden boxes, pallet repair, cabinet and furniture frames.




25a/

Senclamp[®] 7/16" Crown Joint Fastener

Butt and m	Butt and miter joints						
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
5/16″	Chisel	Bright	Plain	Taped	3M	Y05BFA	
⁷ / ₁₆ ″	Chisel	Bright	Plain	Taped	3M	Y07BFA	
⁹ / ₁₆ ″	Chisel	Bright	Plain	Taped	3M	Y09BFAN	





SENCLAMP®

Senclamp has a special webbed design that draws the material together as it drives through it. Made from carbon steel, fasteners are available in 7_{16} " crown and 5_{16} ", 7_{16} " and 9_{16} " lengths to best suit your requirements. Designed for a wide range of joint fastening applications, Senclamp secures joints better, faster and for less.

NAILING THE RIGHT BALANCE OF SIZE, WEIGHT AND POWER

We offer a large selection of pneumatic and cordless nailers for a wide variety of applications.

APPLICATIONS

Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets

KEY FEATURES

- Low profile designs allow for easy access between studs and joists
- Highly efficient internal design for increased durability
- Dry fire lock out prevents dry firing and signals user when to reload
- · Claw-like safety for precise toe-nailing



F-35XP

CORDLESS PNEUMATIC FRAMING NAILER

ITEM #10G0002N



Features

- FUSION[®] cordless air-power technology
- Pressure relief valve & refillable air port
- Brushless motor
- Includes one Li-ion battery, quick charge battery charger and storage bag
- Extended length magazine available, sold separately (see below)

Extended Length Magazines

FOR 20° & 34° CORDLESS PNEUMATIC FRAMING NAILERS

Designed to hold two strips of nails, these extended length magazines replace the stock magazine and are easy to attach with the included Allen wrench.

Extended Length Magazine	Fits
GA0767	F-35XP
GA0778	F-35FRHXP



F-35FRHXP

CORDLESS PNEUMATIC FRAMING NAILER

ITEM #10H0002N

34°



Features

- FUSION[®] cordless air-power technology
- Pressure relief valve & refillable air port
- Brushless motor
- Includes one Li-ion battery, quick charge
- battery charger and storage bag
- Extended length magazine available, sold separately (see below)



Product Reference Chart

TOOL SPECS	F-35XP	F-35FRHXP			
Trigger	Selectable	Selectable			
Technology	FUSION®	FUSION®			
Power Type	Cordless	Cordless			
Weight (with Battery)	11.37 lbs (5.16 kg)	11.38 lbs (5.17 kg)			
Height	14.4" (366 mm)	14.4" (366 mm)			
Length	14.0" (356 mm)	14.6" (371 mm)			
Width	5.5" (140 mm)	4.7" (119 mm)			
Charge Time	50% in less than 20 minutes, 100% in less than 60 minutes				
Warranty	5 yrs	5 yrs			
FASTENER SPECS	Fasteners are located on pages 39–42				
Range	2"-3½"	2"-3½"			
Shank	.113"148"	.113"–.131"			
Capacity	60	35			
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip			
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GD, GL, HD, HL, KD, MD			
TOOL FEATURES					
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free			
Rafter Hook	Yes	Yes			
Dry Fire Lockout	Yes	Yes			

20°

31

FN91T1 3½" PAPER TAPE FRA

31/2" PAPER TAPE FRAMING NAILER



Features

FRAMING, SHEATHING & SUBFLOORS

- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive
- Engineered and Assembled in Cincinnati, Ohio

FN81T1

 $3 \ensuremath{\ensuremath{\mathcal{I}}}\xspace^{\prime\prime}$ full round head framing nailer



Features

- Best in class tool power & durability
- Well-balanced ergonomic design
- In-line magazine for optimal line of sight
- Aggressive toenail safety
- Tool-free depth of drive
- Engineered and Assembled in Cincinnati, Ohio

The New Standard in Framing

The FN81T1 and FN91T1 deliver the power and durability demanded by professional contractors for all-day performance on the toughest jobsites. Upgraded features include an ergonomic design, an in-line magazine for clear line of sight, and a tool-free depth of drive for quick adjustments.





32

Product Reference Chart

FIDUULL NEIEIEILE	, unant			
TOOL SPECS	FN91T1	FN81T1		
Trigger	Sequential	Sequential		
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)		
Air Consumption (60 CPM)	6.7 scfm	6.7 scfm		
Air Inlet	3∕8″ NPT	3%" NPT		
Weight	8.39 lbs (3.8 kg)	8.75 lbs (3.9 kgs)		
Height	14.13" (358 mm)	14.13" (358 mm)		
Length	17.25" (438 mm)	20.75" (527 mm)		
Width	4.88" (123 mm)	4.88" (123 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are located on pages 39–40			
Range	2" or 3½"	2" or 3½"		
Shank	.113"135"	.113"–.148"		
Capacity	80	70		
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip		
Series	ProHead G5, H5, K5, G6, H6, K6 Clipped Head GC, GE, HC, HE, HF, KC, LC	GD, HD, KD, MD, GL, HL		
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free		
Rafter Hook	Yes	Yes		
Dry Fire Lockout	Yes	Yes		

FramePro®325XP

31/4" PAPER TAPE FRAMING NAILER

ITEM #4Z0101N



Features

- Patented TrueDrive magazine reduces jams and misfeeds
- Efficient internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists

FramePro®701XP

 $3^{1\!\!/_2\!\!\prime\prime}$ PAPER TAPE FRAMING NAILER

ITEM #2H0133N



Features

- In-line magazine for optimal line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists

FramePro®751XP

31/2" PAPER TAPE FRAMING NAILER





Magazine Retrofit Kit (Sold Separately)

Updated magazine options					
FITS TOOLS	DESCRIPTION	ITEM #			
FramePro701XP	2-Nail Strip Magazine Retrofit Kit	YJ0055			
FramePro701XP	Double Length Magazine Retrofit Kit	YJ0043			
FramePro751XP	4" Nail Feed System Retrofit Kit	YJ0042			

Features

- In-line magazine for optimal line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists

Product Reference Chart

Product Reference Chart			
TOOL SPECS	FramePro®325XP	FramePro®701XP	FramePro®751XP
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70-120 psi (4.8-8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	3⁄8″ NPT	3∕8″ NPT	3⁄8″ NPT
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	8.4 lbs (3.8 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	15.13" (384 mm)	15.13" (384 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 39–40		
Range	2"-3¼"	2"-3½"	2"-3½"
Shank	.113"–.148"	.113"135"	.113"–.148"
Capacity	83	70	70
Angle/Collation	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC, LC ProHead G5, G6, H5, H6, K5, K6
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Rafter Hook	Yes	Yes	Yes
Dry Fire Lockout	Yes	Yes	Yes

34°

FramePro®325FRHXP

31/4" FULL ROUND HEAD FRAMING NAILER

ITEM #4H0101N

SUBFLOORS

ഷ

FRAMING, SHEATHING



Features

- Patented TrueDrive magazine reduces jams and misfeeds
- Effective internal design means less wear and tear on the compressor
- Claw-like toenail safety
- Fits easily between studs and joists

FramePro®752XP

31/2" FULL ROUND HEAD FRAMING NAILER ITEM #2F0103N

Features

- 20° in-line magazine provides excellent maneuverability and line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists

Product Reference Chart

TOOL SPECS Trigger Selectable Sequential Sequential **Operating Pressure** 70-120 psi (4.8-8.3 bar) 70-120 psi (4.8-8.3 bar) 70-120 psi (4.8-8.3 bar) Air Consumption (60 CPM) 5.2 scfm 10 scfm 11 scfm Air Inlet 3/8" NPT 3/8" NPT 3/8" NPT Weight 7.9 lbs (3.58 kg) 8.4 lbs (3.8 kg) 8.7 lbs (3.97 kg) 11.9" (302 mm) 13.25" (337 mm) 14.25" (362 mm) Height 20" (508 mm) Length 17.3" (440 mm) 20" (508 mm) Width 4.5" (114 mm) 4.17" (106 mm) 4.17" (106 mm) **Main Body Material** Aluminum Aluminum Aluminum Warranty 5 yrs 5 yrs 5 yrs FASTENER SPECS 2"-3¼" 2"-3½" 2"-3½" Range .113"-.148" .120"-.162" .113"-.148" Shank 64 60 60 Capacity Angle/Collation 20-21° Angled Plastic Strip 20-21° Angled Plastic Strip 20-21° Angled Plastic Strip Series GD, GL, HD, HL, HK, KD, KL, MD GD, GL, HD, HL, KD, MD GD, GL, HD, HL, KD, MD TOOL FEATURES Depth-of-Drive Yes, Tool-Free Yes- Tool Free Yes, Tool-Free **Rafter Hook** Yes Yes Yes **Dry Fire Lockout** Yes Yes Yes

FramePro®702XP

31/2" FULL ROUND HEAD FRAMING NAILER



Features

20°

- 20° in-line magazine provides excellent maneuverability and line of sight
- Simple two-step loading
- Claw-like toenail safety
- Fits easily between studs and joists

SCN60XP

2¾" COIL NAILER

ITEM #520101N



Features

- High load capacity
- EZ-Load design saves time
- Fast cycle time increases productivity
- Lightweight for comfortable all-day use

Mini Hand Nailer

2"-31/2" BULK NAILER

ITEM #PC1195



Features

- Compact and powerful enough to drive 2"-3½" bulk nails
- Magnetic nose holds nail in place for safe, accurate placement
- Ultra-light at just 1 pound

SCN65XP

31/2" COIL NAILER

15°

ITEM #540101N - FLAT SAFETY; 540104N - TOENAIL SAFETY



Features

- High load capacity
- EZ-Load design saves time
- Fast cycle time increases productivity
- Light and fast for greater productivity

A20 Hand Nailer 2"-7" BULK NAILER

ITEM #PC0781



Features

- Drives bulk nails from 2"-7"
- Soft rubber palm pad for comfortable grip
- Magnetic nose holds nail in place for safe, accurate placement
- Includes leather strap for comfort

Product Reference Chart

TOOL SPECS	SCN60XP	SCN65XP	SCN65XP Mini Hand Nailer	
Trigger	Contact	Contact	_	_
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar) 60–110 psi (4–7.6 bar)	
Air Consumption (60 CPM)	8.29 scfm	9.54 scfm	2–4 scfm	2-4 scfm
Air Inlet	3⁄8″ NPT	3∕8″ NPT	1⁄4″ NPT	3⁄8″ NPT
Weight	7.5 lbs (3.4 kg)	8 lbs (3.6 kg)	1 lb (.45 kg)	2.4 lbs (1.1 kg)
Height	12.38" (314 mm)	14.1" (359 mm)	4" (101 mm)	5.8" (122 mm)
Length	12.88" (327 mm)	12.88" (327 mm)	2.75" (70 mm)	4" (101 mm)
Width	5.38" (137 mm)	5.38" (137 mm)	2" (55.6 mm)	3.25" (83 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	1 yr	1 yr
FASTENER SPECS		Fasteners are locat	ed on pages 42–44	
Range	2"-23/4"	2"-3½"	Bulk nails from 2"-3½"	Bulk nails from 2"-3½" up to 7" with opt. guide tips
Shank	.099"–.113"	.099"131"	-	.113"148"
Capacity	250-275	225-275	1	1
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	_	-
Series	BK, BL, BT, GD, GL, HR	BJ, BK, BL, BT, GD, GL, HD, HK, HL, KD	_	-
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free		-
Rafter Hook	No	No	_	_
Dry Fire Lockout	No	No	_	_

35

SUBFLOORS

JN91H1 1½" METAL CONNECTOR NAILER



Features

- · Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Leads with the nail to locate metal connector holes, providing accurate
- nail placement

 Dry fire lockout reduces tool wear and indicates the need to reload fasteners
- by the lockout reduces tool wear and indicates the need to reload fusion.

JN91P1 1½"-2½" METAL CONNECTOR NAILER

Features

- Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Nosepiece probe locates metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners
- •

JN91H2

11/2" METAL CONNECTOR NAILER



Features

- Extended magazine holds two racks of nails
- Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Leads with the nail to locate metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91P2

11/2"-21/2" METAL CONNECTOR NAILER



Features

- Extended magazine holds two racks of nails
- Lightweight and well-balanced for comfortable all day use
- Power to drive through engineered lumber
- Nosepiece probe locates metal connector holes, providing accurate nail placement
- Dry fire lockout reduces tool wear and indicates the need to reload fasteners

Product Reference Chart

TOOL SPECS	JN91H1	JN91H2	JN91P1	JN91P2
Trigger	Sequential	Sequential	Sequential	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8 - 8.3 bar)	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	4.4 scfm	4.4 scfm	6.4 scfm	6.4 scfm
Air Inlet	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT	1⁄4″ NPT
Weight	5.48 lbs (2.48 kg)	5.8 lbs (2.63 kg)	7.53 lbs (3.41 kg)	7.92 lbs (3.59 kg)
Height	12.5" (317 mm)	12.5" (317 mm)	14.38" (365 mm)	14.38" (365 mm)
Length	11.13" (282 mm)	17.86" (453 mm)	14" (355 mm)	19" (482 mm)
Width	4.38" (111 mm)	4.88" (123 mm)	5.25" (133 mm)	6.13" (155 mm)
Main Body Material	Magnesium	Magnesium	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are loo	cated on page 45	
Range	11⁄2″	11⁄2″	1½"-2½"	11⁄2″-21⁄2″
Shank	.131"148"	.131"–.148"	.131"162"	.131″–.162″
Capacity	30	55	35	55
Angle/Collation	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip
Series	KJ, MD	KJ, MD	KJ, MD, ND	KJ, MD, ND
TOOL FEATURES				
Depth-of-Drive	No	No	Yes	Yes
Rafter Hook	Yes	Yes	Yes	Yes
Dry Fire Lockout	Yes	Yes	Yes	Yes

SCP40XP

11/2" STANDARD PRESSURE PNEUMATIC CONCRETE & STEEL PINNER

ITEM #7J0001N



Features

- 10 times faster than powder-actuated systems
- No licensing required to operate
- Works with conventional air compressors, hoses and fittings
- Operates at extreme temperatures and altitudes

PS20XP

1" WIDE CROWN, 2" HEAVY WIRE STAPLER

ITEM #9W0001N

16

Features

- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
 Updated aggressive locking feature provides superior holding power for
- complete control of the fastener, offering pinpoint accuracy and unrivaled driveability
- New drive track design eliminates movement of the staple, enhancing overall drive performance and virtually eliminating fastener jams, skipping and misfires

Product Reference Chart



1" WIDE CROWN, 11/2" HEAVY WIRE STAPLER



Features

- \bullet Enhanced EZ-Clear^ ${\ensuremath{^{\rm M}}}$ latch allows for quick access to clear fasteners and
- a new locking feature offers pinpoint accuracy and unrivaled driveability
- Updated drive track eliminates staple movement, virtually eliminating jams
- Robust firing valve design makes the tool fast, powerful and efficient
- Positive-locking adjustable depth-of-drive ensures consistently flush drives

Concrete Pinner

Plaster, stucco & building wrap fastening attachment							
	Fits Tools	Range	ITEM #				
SENCO	SCP40XP	1¼″	NPC035				
				Magnetic washer nosepiece			

Galvanized Metal Washer

ITEM #	Diameter	Box Count	Fits SCP40XP, GT40CP			
SWM125B	11⁄4″	1M	.109" Dia. Concrete Pins			

Feed System Retrofit Kit (Sold Separately)

Updated feed system option			
CONVERTS	ITEM #		
WC150 to PS15XP	YJ0044		

SUBFLOORS

FRAMING, SHEATHING &

TOOL SPECS	SCP40XP	PS15XP	PS20XP	
Trigger	Selectable	Contact	Contact	
Operating Pressure	80–120 psi (5.5–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	
Air Consumption (60 CPM)	5.2 scfm	3.18 scfm	3.45 scfm	
Air Inlet	3⁄8″ NPT	3⁄8″ NPT	3⁄8″ NPT	
Weight	7.1 lbs (3.2 kg)	5.5 lbs (2.5 kg)	5.5 lbs (2.5 kg)	
Height	12.22" (310 mm)	9″ (229 mm)	10" (254 mm)	
Length	18.2" (462 mm)	15.25″ (387 mm)	15.25″ (387 mm)	
Width	4.5" (114.4 mm)	5.5 lbs (2.5 kg)	3.5" (89 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS	F	asteners are located on pages 45-4	7	
Shank/Crown	.109"/.118" Shanks	1" Crown	1" Crown	
Range	1/2"-11/2"	⁵ / ₈ "-1½"	7⁄8″-2″	
Capacity	42	160	160	
Angle/Collation	Straight Plastic Collated Strip	Taped and taped glued	Straight Glued and Taped Strip	
Series	W3	Р	Р	
TOOL FEATURES				
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free	
Belt Hook	No	Yes	Yes	
Dry Fire Lockout	Yes	No	No	

NS20XP

7/16" CROWN, 2" HEAVY WIRE STAPLER

ITEM #9X0001N



Features

FRAMING, SHEATHING & SUBFLOORS

- 15% more powerful than all other construction staplers in its class
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- Updated aggressive locking feature
- Drive track design eliminates movement of the staple
- Can also be used for vinyl siding installation (item number HC0788 required, sold separately)

SNS41

%6" CROWN, 2" HEAVY WIRE STAPLER



Features

- Durable construction minimizes downtime and operating costs
- EZ-Clear™ latch virtually eliminates downtime caused by
- fastener jams
- Fast, multidirectional stitching

Product Reference Chart

NS20BXP

7/16" CROWN, HEAVY WIRE STAPLER

ITEM #9Y0001N



17_{GA}

Features

- 20% more powerful than the standard NS20XP for the most demanding applications
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- Updated aggressive locking feature
- Can also be used for vinyl siding installation (item number HC0788 required, sold separately)

SQS55XP

7/6" CROWN, 21/2" HEAVY WIRE STAPLER




Features

- Fast up to 15 staples per second • EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
- Rugged dependability


TOOL SPECS	NS20XP	NS20BXP	SNS41	SQS55XP
Trigger	Contact	Contact	Contact	Contact
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	80–120 psi (5.5–8.3 bar)	80–120 psi (5.5–8.3 bar)
Air Consumption (60 CPM)	3.5 scfm	3.98 scfm	5.4 scfm	6.54 scfm
Air Inlet	3⁄8″ NPT	3∕8″ NPT	3⁄8″ NPT	3∕8″ NPT
Weight	5.1 lbs (2.3 kg)	5.8 lbs (2.6 kg)	4.6 lbs (2.1 kg)	5.9 lbs (2.7 kg)
Height	11" (279 mm)	11" (279 mm)	10.75" (273 mm)	12" (305 mm)
Length	15" (381 mm)	15" (381 mm)	15" (381 mm)	14.38" (365 mm)
Width	3.5" (89 mm)	4" (102 mm)	3.4" (86 mm)	3.6" (92 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS		Fasteners are locat	ed on pages 46–47	
Crown	7⁄16″	7⁄16″	7⁄16″	7⁄16″
Range	1″-2″	1"-2"	1"-2"	11⁄4″-21⁄2″
Capacity	160	160	160	130
Angle/Collation	Straight Glued and Taped Strip			
Series	N, O	N, O	N, O	Q
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Required	Yes, Tool-Required
Belt Hook	Yes	Yes	No	No
Dry Fire Lockout	No	No	No	No

34° Pr	^{34°} ProHead [®] Smooth Paper Tape Nails								
Framing, sh	Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G524APBXN			
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H527APBXN			
3¼″ x .120″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H528APBXN			
21⁄2″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2M	K525APBXN			
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K527APBXN			
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K527APBXR			
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K528APBXN			
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K528APBXR			
3½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K529APBXN			
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G524ASBXN			
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K527ASBXN			
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K528ASBXN			

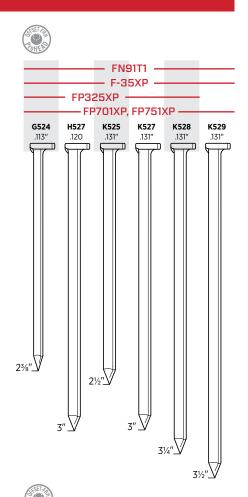

^{34°} ProHead[®] Ring Paper Tape Nails


Framing, sheathing, subfloor, decks, trusses and pallets							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
2¾″ x .113″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G624APBXN	
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H627APBXN	
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K628APBXN	
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G621ASBXN	
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G624ASBXN	
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	H627ASBXN	
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K627ASBXN	
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K628ASBXN	
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K629ASBXN	

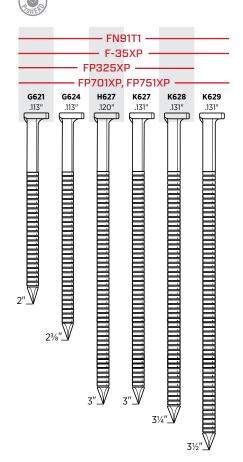

39

^{34°} Smooth Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2¼" x .113"	Diamond	Bt. Hardened	Plain	34° Paper Tape Strip	1M	GC23AHAK		
2" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC21APBX		
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC24APBX		
21⁄2" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC25APBX		
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC27APBX		
3¼" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC28APBX		
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC27APBX		
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC28APBX		
3½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC29APBX		
3½" x .135"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	LC29APBX		
4" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC31APBX*		
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GC24ASBX		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HC27ASBX		
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC27ASBX		
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC28ASBX		
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC29ASBX		
3" x .131"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC27AGBK		
3¼" x .131"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC28AGBK		
*FramePro*751)	KP can drive 4	1 inch nails when 1	fitted with th	ne YJ0042 kit				

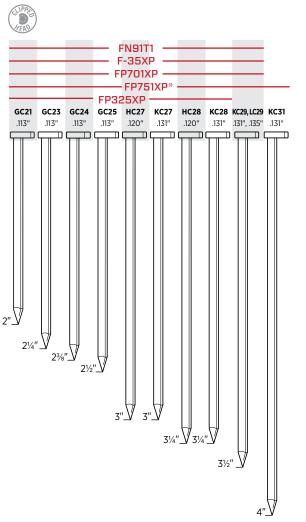


^{34°} Ring Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
2" x .113"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	GE21APAX		
2¾" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GE24APBX		
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE21ASBX		
2¾" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE24ASBX		
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HE27ASBX		
23⁄8" x .113"	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	GE24AGBK		


^{34°} Screw Shank Paper Tape Collated Nails


Framing, sheathing, subfloor, decks, trusses and pallets							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
3″ x .120″	Chisel	Bright	Plain	34° Paper Tape Strip	3.1M	HF27EPAK	
3" x .120"	Chisel	Bright	Sencote	34° Paper Tape Strip	1M	HF27EDB	

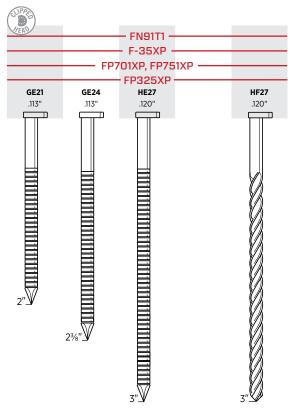

20° sr	20° Smooth Shank Plastic Collated Nails										
Framing, sh	Framing, sheathing, subfloor, decks, trusses and pallets										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
2¾" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD24APBSN					
2½" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD25APBSN					
2½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD25APBSN					
3" x .120"	Diamond	Bright	Sencote	20° Plastic Strip	4M	HD27APBSN					
3" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD27APBSN					
3" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD27APBSN					
3¼″ x .131″	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD28APBSN					
3¼" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD28APBSN					
3½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD29APBSN					
2¾" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GD24ASBS					
2½" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GD25AABSN					
2½" x .120"	Diamond	Exterior	Sencote	20° Plastic Strip	2.3M	HJ25ADBS*					
21⁄2″ x .131″	Diamond	Galv	Sencote	20° Plastic Strip	2.5M	KD25AABS					
3" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD27ASBS					
3¼" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD28ASBS					
3½" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD29ASBS					
3¼" x .131"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	KD28AGBS					

Roof tile nails, drive with FramePro 725XP or SN952XP

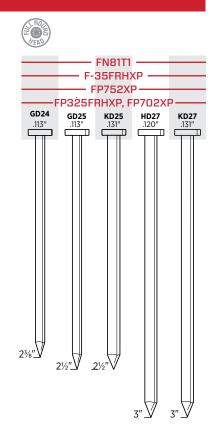


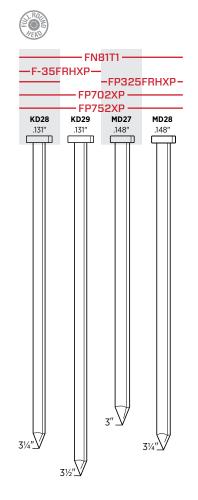

FRAMING, SHEATHING & SUBFLOOR FASTENERS

^{20°} Ring Shank Plastic Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
2" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL21APBSN				
23⁄8" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL24APBSN				
2" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL21ASBS				
2¾" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GL24AABSN				
2¾" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL24ASBS				
3" x .120"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	HL27ASBS				
23⁄8" x .113"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	GL24AGBS				
3" x .120"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	HL27AGBS				




15° Ring Shank Subflooring Nails

Superior fastening in subfloor applications										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
2" x .099"	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	6.6M	BT21APBF				
2¾″ x .113″	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	4M	GT24APBF				
2½" x .131"	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	4M	KT25APBF				

Subfloor and Sheathing Coil Nails


- Superior fastening in floor applications
- Tested and proven to reduce squeaky subfloors, uneven surfaces, and raised nail heads
- Unique double rings shank design reduces the potential of nails backing out, one of the most common flooring problems






^{15°} Smooth Shank Coil Nails

Framing, sh	Framing, sheathing, pallets, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF			
2½" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF			
2½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF			
3" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF			
3¼" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF			
3½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF			
5" x .148"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF			
2" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF			
2½" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF			
3" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF			
3¼" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF			

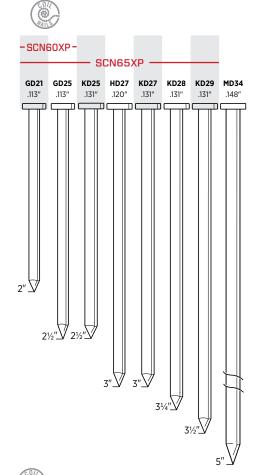


^{15°} Ring Shank Coil Nails

Framing, sh	Framing, sheathing, pallets, subfloor, decks and trusses										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF					
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF					
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF					
2¾" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF					
2¼" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF					
2¾" x .113"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF					
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF					
2¾" x .113"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF					

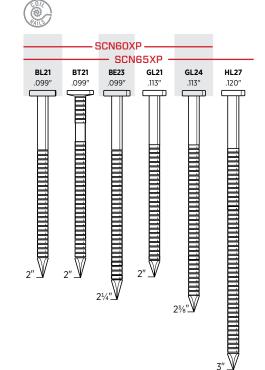

15° Screw Shank Coil Nails

Framing, sh	Framing, sheathing, pallets, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN			
2¼" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN			
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN			

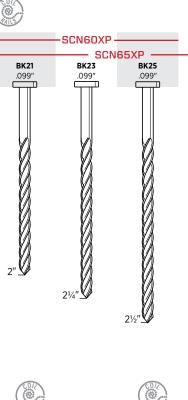

15° Smooth Shank Stiff-Stock Coil Nails

For fastening wood to masonry								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
1½" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3M	M003011		


15° Duplex Smooth Shank Coil Nails*


Framing, trusses, crating and concrete forms								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
21⁄8″ x .120″	Diamond	Bright	Plain	15° Flat Wire Welded Coil	5.4M	HR22APAF		
2 ⁷ ⁄ ₈ " x .120"	Diamond	Bright	Plain	15° Flat Wire Welded Coil	3.6M	HR74APAF		

*Requires a special-order modified SCN60XP tool (order XA1739)

Drywall Ring Shank Bugle Head Coil Nails

For fastening drywall to wood									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1½" x .099"	Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG17AAAQ			
15⁄8″ x .099″	Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG18AAAQ			






HK27

.120″

Г



-SCN65XP-

M003011

.099″ Π


11⁄2″ V

0°

Collated Concrete and Steel Pins

For fastening drywall track, wood furring, hat channels, metal washers or ceiling grid to concrete, concrete block and steel

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1⁄2" x .109"/.118"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3050YXS
¾″ x .109″	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3075YXC
1" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3100YXC
1¼" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3125YXC
1½" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3150YXC



^{34°} Hardened Metal Connector Nails

Joist hanger	Joist hangers, foundation anchors, seismic and hurricane straps and ties									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	3M	MD17AQBD				
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	MD25AQBDN				
21⁄2″ x .162″	Diamond	Bright	Plain	34° Paper Tape Strip	2M	ND25AQBDN				
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	3M	MD17AJBDN				
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2.5M	MD25AJBDN				
2½" x .162"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	ND25AJBDN				

^{34°} Heat Treated Metal Connector Nails


Joist hangers, foundation anchors, seismic and hurricane straps and ties								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	KJ17AHBD		
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	MD25AHBD		
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	KJ17AEBD		

JN91H1/JN91H2 JN91P1/JN91P KJ17 MD25 ND25 .131" .148" .162" .131" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .162" .111" .148" .148" <tr/tr>

^{34°} Non-Heat Treated Metal Connector Nails

Standard tensile, non-hardened nails for use in joist hangers, foundation anchors, seismic and hurricane straps and ties


Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002261
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002263
21⁄2″ x .148″	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	M002265
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002262
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002264
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.5M	M002266




1" Crown Heavy Wire Staples

	Sheathing, house wrap, composite roofing, roofing felt, corrugated containers, foam insulation board, furniture/cabinet frames and butt joints										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
3⁄8″	Chisel	Galv	Plain	Glued	10M	P06BAA*					
1⁄2″	Chisel	Galv	Sencote	Taped	10M	P08BABT*					
5⁄8″	Chisel	Galv	Sencote	Taped	10M	P10BAB*					
5⁄8″	Divergent	Galv	Sencote	Glued	10M	P10FAB*					
5⁄8″	Chisel	Galv	Coated	Glued	10M	P10BPE*					
3⁄4″	Chisel	Galv	Sencote	Taped	10M	P11BAB					
3⁄4″	Chisel	Galv	Coated	Glued	10M	P11BPE					
7⁄8″	Chisel	Galv	Sencote	Taped	10M	P12BAB					
1″	Chisel	Galv	Sencote	Taped	10M	P13BAB					
1″	Chisel	Galv	Sencote	Glued	10M	P13BPE					
11⁄4″	Chisel	Galv	Sencote	Taped	10M	P15BAB					
11⁄4″	Chisel	Galv	Coated	Glued	10M	P15BPE					
1½″	Chisel	Galv	Sencote	Taped	10M	P17BAB					
1¾″	Chisel	Galv	Sencote	Taped	5M	P19BAB					
2″	Chisel	Galv	Sencote	Taped	5M	P21BAB					
1″	Outside Chisel	Stainless 304	Sencote	Taped	5M	P13BGBN					

*Use kit #YK0883 with PS15XP for 3/8"-5/8" staples

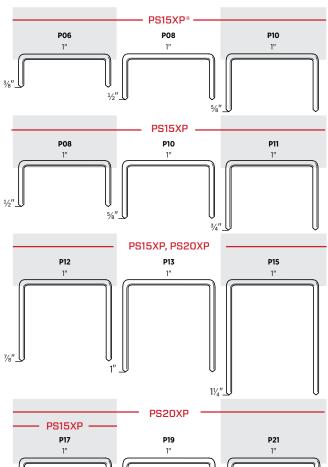




17aa 7/16" Crown Heavy Wire Staples*


Sheathi	Sheathing, subfloor, furniture frames and crates										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
11⁄4″	Chisel	Bright	Sencote	Glued	21.12M	O15BRBBN					
13⁄8″	Chisel	Bright	Sencote	Glued	17.6M	O16BRBBN					
1½″	Chisel	Bright	Sencote	Glued	17.6M	O17BRBBN					
15⁄8″	Chisel	Bright	Sencote	Glued	17.6M	O18BRBBN					
1¾″	Chisel	Bright	Sencote	Glued	14.08M	O19BRBBN					


*Compatible with NS20XP, NS20BXP, SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.

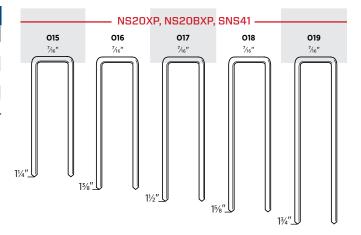

46

16 GA	16 GA 7/16" Crown Heavy Wire Staples											
Sheathin	Sheathing, soffits, underlayment, lattice, cabinets, casebacks and drawers											
Length	Point	Finish	Coating	Collation	Box Count	Item Code						
3⁄4″	Chisel	Bright	Sencote	Glued	5M	N11BRB						
1″	Chisel	Bright	Sencote	Glued	5M	N13BRB						
11⁄8″	Chisel	Bright	Sencote	Taped	10M	N14BRB						
11⁄4″	Chisel	Bright	Sencote	Taped	10M	N15BRB						
13⁄8″	Chisel	Bright	Sencote	Taped	10M	N16BRB						
11⁄2″	Chisel	Bright	Sencote	Taped	10M	N17BRB						
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB						
1¾″	Chisel	Bright	Sencote	Taped	10M	N19BRB						
2″	Chisel	Bright	Sencote	Taped	10M	N21BRB						
1⁄2″	Chisel	Galv	Sencote	Glued	5M	N08BABN						
1/2"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN						
1/2"	Diverg	Galv*	Sencote	Glued	5M	N08FBB						
5⁄8″	Chisel	Galv*	Sencote	Glued	5M	N10BAB						
3⁄4″	Chisel	Galv	Sencote	Glued	5M	N11BAB						
3⁄4″	Diverg	Galv*	Sencote	Glued	5M	N11FBB						
7⁄8″	Chisel	Galv	Sencote	Glued	5M	N12BABN						
7⁄8″	Diverg	Galv	Sencote	Glued	5M	N12FABN						
1″	Chisel	Galv	Sencote	Glued	5M	N13BAB						
1″	Diverg	Galv	Sencote	Glued	5M	N13FAB						
11⁄8″	Chisel	Galv	Sencote	Taped	10M	N14BAB						
11⁄4″	Chisel	Galv	Sencote	Taped	10M	N15BAB						
11⁄4″	Diverg	Galv	Sencote	Glued	10M	N15FAB						
13⁄8″	Chisel	Galv	Sencote	Taped	10M	N16BAB						
1½″	Chisel	Galv	Sencote	Taped	10M	N17BAB						
15⁄8″	Chisel	Galv	Sencote	Taped	10M	N18BAB						
1¾″	Chisel	Galv	Sencote	Taped	10M	N19BAB						
2″	Chisel	Galv	Sencote	Taped	10M	N21BAB						
1¼″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB						
1½″	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB						
1¾″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN						
2″	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN						
*Galvanized	High-Ton	silo Stool										






*Galvanized High-Tensile Steel

15 7/16" Crown Heavy Wire Staples

Framing, sheathing, subflooring, decking, lathing, door and window units, fencing, pallets, crate and box assembly, furring and furniture framing										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
11⁄2″	Chisel	Bright	Sencote	Taped	5M	Q17BRB				
1¾″	Chisel	Bright	Sencote	Taped	5M	Q19BRB				
2″	Chisel	Bright	Sencote	Taped	5M	Q21BRB				
21⁄4″	Chisel	Bright	Sencote	Taped	5M	Q23BRB				
21⁄2″	Chisel	Bright	Sencote	Taped	5M	Q25BRB				
1¼″	Chisel	Galv	Sencote	Taped	5M	Q15BAB				
1½″	Chisel	Galv	Sencote	Taped	5M	Q17BAB				
1¾″	Chisel	Galv	Sencote	Taped	5M	Q19BAB				
2″	Chisel	Galv	Sencote	Taped	5M	Q21BAB				
2½″	Chisel	Galv	Sencote	Taped	5M	Q25BAB				
1¾″	Chisel	Stainless 304	Sencote	Taped	2.2M	Q19BGBN				
2½″	Chisel	Stainless 304	Sencote	Taped	1M	Q25BGBN				



WE COVER IT ALL

When it comes to roofing applications or installing siding, uptime is everything. SENCO has designed a full line of tools and fasteners to maximize your productivity.


Our RoofPro™445XP with its innovative firing valve uses 5% less air. A bi-metal driver blade increases durability. And our power in, power out feed system is air driven for stability and speed.

APPLICATIONS

SENCO offers a variety of coil nailers and crown staplers with fasteners optimized for different types of shingles, siding, sheathing, and felt underlayment.

KEY FEATURES

- High-strength housings
- Long-lasting wear plates
- Easy, one-handed operation
- Adjustable depth-of-drive

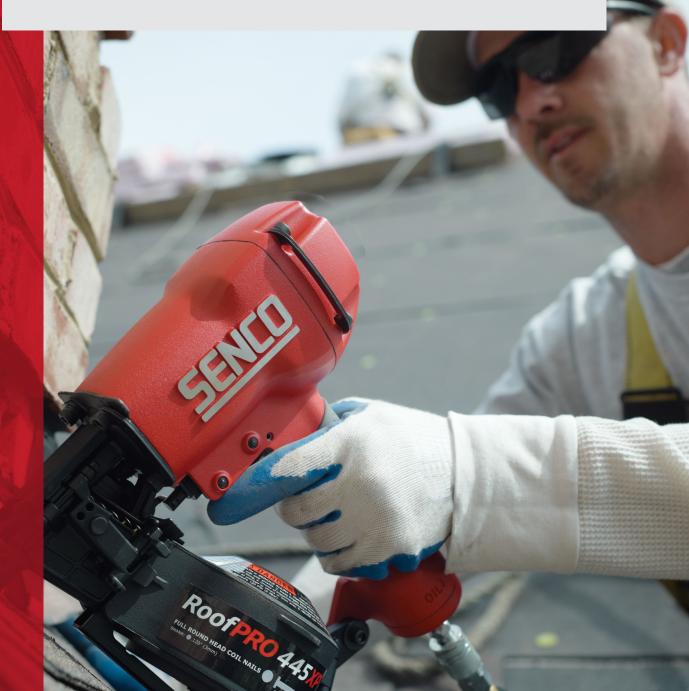

ROOFING, SIDING & FENCING

15°

RoofPro™445XP

1¾" COIL NAILER

ITEM #8V0001N



Features

- Innovative firing valve reduces air consumption without compromising power or speed
- Bi-metal driver blade reduces wear and improves durability
- Power in, power out feed system improves speed and delivers consistent drives
- Metal wear plate in nail canister reduces wear and helps improve nail feed
- Adjustable and removable shingle guide

SN71P1 2½" COIL NAILER

15°



Features

- Dual collation allows the choice between wire or plastic collation
- Tool-free depth of drive
- High load capacity (up to 375 nails)
- Overmold grip
- Rotatable rafter hook
- EZ-Load design



Product Reference Chart

TOOL SPECS	RoofPro™445XP	SN71P1		
Trigger	Contact	Selectable		
Operating Pressure	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	3.86 scfm	4.6 scfm		
Air Inlet	½" NPT	3∕8″ NPT		
Weight	5.2 lbs (2.35 kg)	5.58 lbs (2.53 kg)		
Height	10.9" (276 mm)	12.75" (324 mm)		
Length	10.6" (269 mm)	11.63" (295 mm)		
Width	4.5" (114 mm)	5.06" (129 mm)		
Main Body Material	Aluminum	Magnesium		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are loca	red on pages 51–52		
Range	³ / ₄ "-1 ³ / ₄ "	1¼"-2½"		
Shank	.120″	.082"092"		
Capacity	120	250-375		
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded or Plastic Carrier Coil		
Series	HJ, MOO	ED, EJ, EL, SE		
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free		
Tool-Free Jam Clearing	Yes	Yes		
Adjustable Exhaust	No	Yes		

PS15RXP

1" CROWN 11/2" ROOFING STAPLER

ITEM #9U000IN 16.4

Features

- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- New aggressive locking feature offers pinpoint accuracy and unrivaled driveability
- Updated drive track eliminates staple movement, virtually eliminating jams
- Positive-locking adjustable depth-of-drive ensures consistently flush drives
- Hardened wear plates and safety protect tool from shingle damage

BC58

1/2" CROWN 5/8" STAPLE + 1" CAP



Features

- EZ-Load system for staples and caps
- Ultra-lightweight for ease of use and maneuverability
- Balanced and fast for greater productivity
 Side-mounted cap collator holds caps regardless of tool position

A11 %6" CROWN %" HAMMER STAPLER

ITEM #PC0700





Features

- Rugged all-steel construction
- Easy to service and maintain
- Comfortable fluted handle with grip

Product Reference Chart

TOOL SPECS	PS15RXP	BC58	A11	
Trigger	Contact	Contact	_	
Operating Pressure	70-120 psi (4.8-8.3 bar)	60-95 psi (4.1-6.5 bar)	_	
Air Consumption (60 CPM)	3.18 scfm	.77 scfm	_	
Air Inlet	3∕8″ NPT	1⁄4″ NPT	_	
Weight	5.5 lbs (2.5 kg)	4.1 lbs (2 kg)	2 lbs (.9 kg)	
Height	9" (229 mm)	8.5" (216 mm)	1.75″ (44.4 mm)	
Length	15.25" (387 mm)	12.5" (317 mm)	12.3" (312.4 mm)	
Width	4" (105 mm)	3.5″ (89 mm)	_	
Main Body Material	Main Body Material Aluminum		Steel	
Warranty	5 yrs	5 yrs	1 yr	
FASTENER SPECS		Fasteners are located on page 53		
Gauge	16	21	20	
Crown	1″	1⁄2"	7⁄16″	
Range	5⁄8″-1½″	5‰" Galv.	3⁄8"	
Capacity	160	110	168	
Angle/Collation	Taped and taped glued	Glued Staple, Laser Welded Cap	Straight Glued Strip	
Series	Р	M004092, Cap	Н	
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	No	_	
Tool-Free Jam Clearing	Yes	No	Yes	
Adjustable Exhaust	No	Yes	_	


ROOFING, SIDING & FENCING FASTENERS

^{15°} Smooth Shank Coil Nails

Siding, aspl	Siding, asphalt and fiberglass shingles and vapor barriers									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
3⁄4″ x .120″	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003101				
1" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003103				
1¼" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003104				
1½" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003105				
1¾" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003106				


Vinyl Siding Attachment (Sold Separately)

Convert RoofPro™445XP and RoofPro™455XP into vinyl siding nailer						
Fits Tool	Item Code					
RoofPro™445XP	HA0308					
RoofPro™455XP	MA0013					

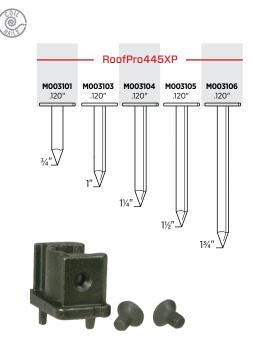



Siding, pacl	Siding, packaging, fencing, pallets and underlayment									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1½" x .099"	Diamond	Bright	Sencote	15° Plastic Carrier Coil	6M	BD17APBC				
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH				
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH				
2¼" x .092"	Diamond	Exterior	Sencote	15° Conical Wire Welded Coil	7.2M	EJ23ADBH				
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EJ23ASBC				





51

ROOFING, SIDING & FENCING FASTENERS

15° Ring Shank Coil Nails

Siding, packaging, fencing, wood shingles, crating and pallets										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1¼" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	15M	SE15APB				
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH				
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH				
1¾" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	12M	SE19APB				
1¾″ x .092″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH				
1 ⁷ /8" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH				
1⅔″ x .092″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH				
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH				
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH				
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EL23ASBC				
2¼″ x .092″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH				
1¾″ x .092″	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH				
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH				
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH				







ROOFING, SIDING & FENCING FASTENERS


16 and 1" Crown Heavy Wire Staples

Composite roofing, roofing felt, foam insulation board, house wrap, sheathing, corrugated containers, furniture/cabinets and butt joints **Collation Box Count** Length Point Finish Coating Item Code 3/2' Galv Plain 10M P06BAA* Chisel Glued $\frac{1}{2}''$ Galv 10M Chisel Sencote Taped P08BABT* 5⁄8″ Chisel Galv Sencote Taped 10M P10BAB* 5⁄8″ Divergent Galv Sencote Glued 10M P10FAB* 5⁄8″ Chisel Galv Coated Glued 10M P10BPE* Taped 3/4" Chisel Galv Sencote 10M P11BAB 3/4" Chisel 10M P11BPE Galv Coated Glued 7⁄8″ 10M Chisel Galv Taped P12BAB Sencote 10M P13BAB 1″ Chisel Galv Sencote Taped 1″ Chisel Galv Sencote Glued 10M P13BPE 11/4" Chisel Galv Taped 10M P15BAB Sencote 11/4" Chisel Galv 10M P15BPE Coated Glued 11/2" Chisel Galv Sencote Taped 10M P17BAB Stainless Outside 1″ Sencote Taped 5M P13BGBN Chisel 304

*Use kit #YK0883 with PS15RXP for 3%"-5%" staples








20_{cA} 7/16" Crown Fine Wire Staples


Roofing, insulation and vapor barriers									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
³ ⁄8″	Chisel	Galv	Plain	Glued	5M	H06BAA			

21 ••• 1" Cap & ½" Crown Staples

Roof felt installation and house wrap									
Length Point Finish Coating Collation Box Count Item Co									
5⁄8″	Chisel	Galv	Plain	Glued	2.2M	M004092			
1″	-	Plastic	_	Laser Weld	2.2M	-			







THE DURABILITY TO DRIVE ALL DAY

SENCO's PalletPro™ heavy-duty coil nailers are built specifically for the challenges of pallets and crating. The PalletPro130 can drive fasteners as long as 5½" and hold up to 225 nails.

APPLICATIONS

Pallets, crates, heavy-duty framing and truss attachment

KEY FEATURES

- Durable drivers and bumpers
- Flexible collation deflectors
- Dust guards for safe operation and extended use

Clinch and sisal anvil staple tools come in 18 and 20 gauge ½" and ½" crowns. Great for hand-held or mounted applications.

APPLICATIONS

Packaging, corrugated box fabrication, shoe making and bedding: basically any time two materials must be stapled and clinched together

FEATURES

- High-capacity magazines
- Extended reach capability
- Tool-free adjustable anvil opening
- Bottom-load magazines



PalletPro[™]57FXP

2¹/₄" COIL NAILER

ITEM #4L0001N



Features

- High load capacity
- Utra-durability driver and piston bumper for long life
- Adjustable nail canister accommodates wide range of nails
- Body protection side steel wear plates reduce abrasion of tool

PalletPro[™]100XP

4" COIL NAILER (SPECIAL ORDER TOOL)



Features

- High load capacity
- Includes optional heavy-duty threaded T-handle
- Flexible collation deflector and dust guard for improved safety in commercial environments
- Strengthened driver and bumper for extended use and reliable service

PalletPro[™]130XP

51/8" COIL NAILER (SPECIAL ORDER TOOL) ITEM #5M0001N







Features

- High load capacity
- Includes optional heavy-duty threaded T-handle • Flexible collation deflector and dust guard for
- improved safety in commercial environments • Strengthened driver and bumper for extended
- use and reliable service

Product Reference Chart

TOOL SPECS	PalletPro™57FXP	PalletPro™100XP	PalletPro™130XP	
Trigger	Contact	Contact	Sequential	
Operating Pressure	70-120 psi (4.9-8.4 bar)	70–120 psi (4.9–8.4 bar)	70–120 psi (4.9–8.4 bar)	
Air Consumption (60 CPM)	3.07 scfm	11.4 scfm	11.4 scfm	
Air Inlet	3⁄8″ NPT	3⁄8″ NPT	3⁄8″ NPT	
Weight	5.9 lbs (2.67 kg)	11.5 lbs (5.24 kg)	13 lbs (5.9 kg)	
Height	11.25" (286 mm)	16.5" (418 mm)	18″ (457 mm)	
Length	11.88" (302 mm)	13.25″ (338 mm)	13" (330 mm)	
Width	5.25" (123 mm)	6" (153 mm)	6.6" (168 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS	F	asteners are located on pages 58-5	9	
Range	1''-21/4''	21⁄4″-4″	3"-5½"	
Shank	.082"092"	.099"148"	.120"148"	
Capacity	300-350	225-300	120-225	
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	
Series	BK, ED, EJ, EL, SE	BE, BK, BL, BT, HK, GD, GL, HD, HL, KD	HD, HK, HL, KD, MD	
TOOL FEATURES				
Tool-Free Jam Clearing	Yes	Yes	Yes	
Depth-of-Drive	No	No	No	
Debris Shield	Yes	Yes	Yes	

PALLETS & CRATING

DFPXP 20 Ga. 1/2" CROWN, 1/2" STAPLE **CLINCH TOOL**

ITEM #8H0001N



Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening • Rubber comfort grip reduces vibration, slipping
- and fatigue · Bottom-load magazine for quick reloading
- 6.9" throat allows for extended reach into cartons

F75LXP

18 Ga. 7/16" CROWN, 5/8" STAPLE **CLINCH TOOL**

ITEM #8J0002N **18**_G

Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening Rubber comfort grip reduces vibration, slipping
- and fatigue • Bottom-load magazine for quick reloading
- 6.9" throat allows for extended reach into cartons

F75SXP

18 Ga. 7/16" CROWN, 5/8" STAPLE SISAL ANVIL

ITEM #8J0001N



Features

- High-capacity magazine less reloading means greater productivity
- Tool-free adjustable anvil opening Rubber comfort grip reduces vibration, slipping and fatigue
- · Bottom-load magazine for quick reloading

Product Reference Chart

Product Reference	Ghart			
TOOL SPECS	DFPXP	F75LXP	F75SXP	
Trigger	Sequential	Sequential	Sequential	
Operating Pressure	65–100 psi (4–7 bar)	65-100 psi (4-7 bar)	65–100 psi (4–7 bar)	
Air Consumption (60 CPM)	.7 scfm	.7 scfm	.8 scfm	
Air Inlet	1⁄4″ NPT	¼″ NPT	½″ NPT	
Weight	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	
Height	12.9″ (327 mm)	12.9" (327 mm)	12.9" (327 mm)	
Length	14.9" (380 mm)	14.9" (380 mm)	14.9" (380 mm)	
Width	3″ (75 mm)	3″ (75 mm)	3″ (75 mm)	
Main Body Material	Aluminum	Aluminum	Aluminum	
Warranty	5 yrs	5 yrs	5 yrs	
FASTENER SPECS		Fasteners are located on page 59		
Gauge	20	18	18	
Crown	1/2"	7⁄16″	7⁄16″	
Range	5/16''-5/8''	5/16''-5/8''	5⁄16″-5⁄8″	
Capacity	230	152	152	
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	
Series	F	J	J	
TOOL FEATURES				
Tool-Free Adjustable Anvil Opening	Yes	Yes	Yes	
Bottom-Load Magazine	Yes	Yes	Yes	
Extended Reach Capability	Yes	Yes	No	

PALLETS & CRATING FASTENERS

15° Smooth Shank Coil Nails

Pallets, crates, fencing, siding and underlayment								
Length Point Finish Coating Collation Box Cour						Item Code		
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH		
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH		



EJ21

.092″

2″_)

PAL57XP


ED23

.092″



Smooth Shank Coil Nails

Pallets, fran	Pallets, framing, sheathing, subfloor, decks and trusses									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF				
2½" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF				
2½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF				
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF				
3" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF				
3¼" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF				
3½" x .131"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF				
5" x .148"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF				
2" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF				
2½" x .113"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF				
3" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF				
3¼" x .131"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF				

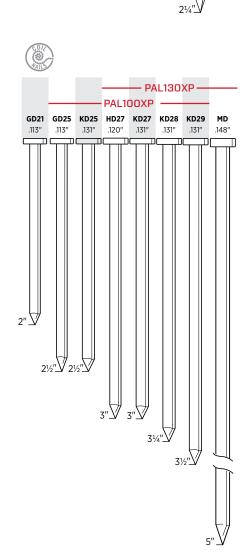


PALLETS & CRATING FASTENERS


^{15°} Ring Shank Coil Nails

Pallets, crat	Pallets, crates, fencing, wood shingles, siding and underlayment									
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH				
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH				
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH				
11/8" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH				
11/8" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH				
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH				
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH				
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH				
1¾" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH				
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH				
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH				

^{15°} Ring Shank Coil Nails

Pallets, framing, sheathing, subfloor, decks and trusses									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF			
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF			
2¾" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF			
2¼" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF			
2¾" x .113"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF			
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF			
2¾" x .113"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF			



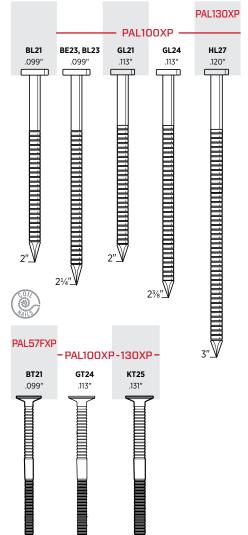

2"_

23⁄8″_

21/2"_

^{5°} Step Ring Shank Nails

Superior fastening in subfloor applications									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	6.6M	BT21APBF			
2¾" x .113"	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	4M	GT24APBF			
2½″ x .131″	Diamond	Bright Basic	Sencote	15º Flat Wire Welded Coil	4M	KT25APBF			

Step Ring Pallet Coil Nails

- Superior fastening in pallet applications
- Tested and proven to reduce raised nail heads
- Unique double rings shank design reduces the potential of nail backing outs

S


& CRATING FASTENER

PALLETS

PALLETS & CRATING FASTENERS


15° Screw Shank Coil Nails

Pallets, fram	Pallets, framing, sheathing, subfloor, decks and trusses								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN			
2¼" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN			
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN			
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN			

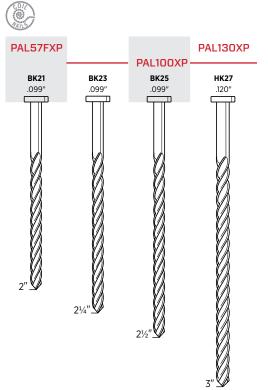


20 _{GA}	1⁄2"	Crown	Fine	Wire	Staples
-------------------------	------	-------	------	------	---------

Packagin	Packaging, set-up boxes and bedding										
Length	Point	Finish	Coating	Collation	Box Count	Item Code					
⁵ ⁄16″	Chisel	Galv	Sencote	Glued Strip	24M	F05BAAP					
3/8"	Chisel	Galv	Sencote	Glued Strip	10M	F06BAA					
3⁄8″	Chisel	Galv	Sencote	Glued Strip	24M	F06BAAP					
1⁄2″	Chisel	Galv	Sencote	Glued Strip	10M	F08BAAN					
1⁄2″	Chisel	Galv	Sencote	Glued Strip	15M	F08BAAP					
³ ⁄8″	Chisel	Stainless 304	Sencote	Glued Strip	10M	F06BGA					



18 an 7/16" Crown Fine Wire Staples

For assembling packaging and joining corrugated materials									
Length Point Finish Coating Collation Box Count Item Cod									
3⁄8″	Chisel	Galv	Plain	Glued Strip	5M	J06BAA			
1⁄2″	Chisel	Galv	Plain	Glued Strip	5M	J08BAAN			
5⁄8″	Chisel	Galv	Plain	Glued Strip	5M	J10BAAN			



SENCO HAS YOU COVERED

SENCO offers a range of fine and medium wire staplers for upholstery and furniture assembly. Our upholstery staplers are the most customizable in the industry, with long nosepieces, extended magazines and a wide range of fasteners for any project.

APPLICATIONS

Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction

KEY FEATURES

- Lightweight
- Ergonomic
- Variety of configurations



SFT10XP FAMILY

3/16", 3/8", 7/16", 1/2" CROWN, 5%" FINE WIRE STAPLERS

SFTIOXP 22.0 20.0

Features

Heavy-duty steel cap

- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Models and Item Codes									
Crown	Ga	Staple	Description	Item Code					
³ ⁄16″	22	A/D Wire	Standard	6S0001N					
³ ⁄16″	22	A/D Wire	Auto	6S0101N					
1⁄2″	22	B Wire	Standard	6S0011N					
³∕8″	22	C Wire	Standard	6S0021N					
3⁄8″	22	C Wire	Auto	6S0121N					
³ ⁄16″	20	E Wire	Standard	6S0031N					
1⁄2″	20	F Wire	Standard	6S0041N					
3⁄8″	20	G Wire	Standard	6S0051N					

SFT10XP FAMILY

¾6", ¾", ⅔6", ½" CROWN, %" FINE WIRE STAPLERS



Features

- Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabricAutomatic models have adjustable speed triggers
- **Models and Item Codes** Ga Staple Crown Description Item Code 22 B Wire Standard 6S0211N 1/2 1⁄2″ 22 B Wire Auto 6S0311N 3⁄8″ 22 C Wire Standard 6S0221N 3/8" 22 C Wire Auto 6S0321N 1/2" 20 F Wire Auto 6S0341N 3/8" 6S0251N 20 G Wire Standard 7/16" 20 H Wire 6S0361N Auto

SFT10XP FAMILY

3/16", 3/8", 7/16", 1/2" CROWN, 5/8" FINE WIRE STAPLERS

LONG NOSE



Features

- Heavy-duty steel cap
- Short trigger stroke
- Rear exhaust keeps oil off fabric
- Automatic models have adjustable speed triggers

Models and Item Codes								
Crown	n Ga Staple Description Ite							
3⁄8″	22	C Wire	Standard	6S0421N				

Product Reference Chart

TOOL SPECS	SFT10XP			
Trigger	Sequential, Auto			
Operating Pressure	60-95 psi (4.1-6.5 bar)			
Air Consumption (60 CPM)	.77 scfm			
Air Inlet	¼″ NPT			
Weight	2.1 lbs (0.955 kg)			
Height	6.57" (167 mm)			
Length	8.58" (218 mm)			
Width	1.65″ (42 mm)			
Main Body Material	Aluminum			
Warranty	5 yrs			
FASTENER SPECS	Fasteners are located on pages 63–64			
Gauge	22, 20			
Crown	3/16", 3/8", 7/16", 1/2"			
Range	1⁄4''-5⁄8''			
Capacity	110-92			
Angle/Collation	Straight Glued Strip			
Series	A, B, C, D, E, F, G, H			



Stapling Upholstery for **Over 70 Years**

SENCO[®] offers 18 configurations of upholstery staplers and over 40 combinations of staple length, crown and gauge.

UPHOLSTERY & FURNITURE

SFW09

3%" CROWN, 5%" FINE WIRE STAPLER

ITEM #4C0001N



22

Features

- Rear exhaust keeps oil off fabric
- Full 1" lip length
- Rear magazine bumper protects fabric
- Rounded steel cap won't snag fabric

NS20BXP



Features

- 20% more powerful than the standard NS20XP for the most demanding applications
- Enhanced EZ-Clear[™] latch allows for quick access to clear fasteners
- Updated aggressive locking feature
- New drive track design eliminates movement of the staple

The NS20BXP is the Benchmark Stapler for the Furniture Industry.

- 20% more powerful than all other staplers in its class to handle even the toughest engineered woods.
- Drives both 16 and 17 gauge, $7\!\!{}_{16}{}''$ crown staples (1" to 2" in length).
- The combination of class-leading power, durability and ergonomics make it an unrivaled professional tool.




Product Reference Chart

	, onan			
TOOL SPECS	SFW09	NS20BXP		
Trigger	Dual	Contact		
Operating Pressure	60–95 psi (4.1–6.5 bar)	70-120 psi (4.8-8.3 bar)		
Air Consumption (60 CPM)	.77 scfm	3.98 scfm		
Air Inlet	¼″ NPT	3%" NPT		
Weight	2.1 lbs (0.955 kg)	5.8 lbs (2.6 kg)		
Height	6" (152 mm)	11" (279 mm)		
Length	9.25″ (235 mm)	15" (381 mm)		
Width	1.63" (41 mm)	4" (102 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are locat	ed on pages 63, 65		
Gauge	22	17 (O-Wire), 16 (N-Wire)		
Crown	3/8"	7⁄16″		
Range	⁵ / ₃₂ "- ⁵ / ₈ "	1"-2"		
Capacity	110-168	160		
Angle/Collation	Straight Glued Strip	Straight Glued/Taped Strip		
Series	C	N, O		

UPHOLSTERY & FURNITURE FASTENERS

22_{ca} _{3/16}" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
1⁄4″	Chisel	Galv	Sencote	Straight Glued Strip	10M	A04BAAN			
3⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	30M	A06BABN			
3⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	40M	A06BABP			
1⁄2″	Chisel	Galv	Sencote	Straight Glued Strip	20M	A08BAB			
1⁄2″	Chisel	Galv	Sencote	Straight Glued Strip	30M	A08BABP			
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	20M	D10BABN			
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	23M	D10BABPN			



B04

1⁄2″

1/4"

SFT10XP-B

B06

1⁄2″

1/2".

3/8"

B08

1⁄2″

½" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	25M	B04BAAPN				
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	40M	B06BAAP				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	25M	B08BAAP				

^{GA} ¾" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
⁵ ⁄32″	Chisel	Galv	Plain	Straight Glued Strip	60M	C02BAAPN				
³ ⁄16″	Chisel	Galv	Plain	Straight Glued Strip	55M	C03BAAPN				
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	35M	C04BAAP				
⁵∕16″	Chisel	Galv	Plain	Straight Glued Strip	28M	C05BAAPN				
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	50M	C06BAAP				
7⁄16″	Chisel	Galv	Plain	Straight Glued Strip	40M	C07BAAPN				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	35M	C08BAAP				
5⁄8″	Chisel	Galv	Plain	Straight Glued Strip	27M	C10BAAP				
³ ⁄16″	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C03BGAN				
1⁄4″	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C04BGAN				
3⁄8″	Chisel	Stainless 304*	Plain	Straight Glued Strip	10M	C06BHA				
3/8"	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	C06BGA				


* High-Tensile 304 Stainless Steel

21_G


22

³/16" Crown Fine Wire Staples

Furniture	Furniture upholstery, felt, insulation, casebacks, screening and shoes								
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	10M	W10BAB			




63



UPHOLSTERY & FURNITURE FASTENERS


20_{GA} _{3/16}" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
3/8"	Chisel	Galv	Plain	Straight Glued Strip	10M	E06BAA				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	10M	E08BAA				
5⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	E10BAA				




20_{GA} ½" Crown Fine Wire Staples

Upholstery, felt, insulation and casebacks										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	10M	F04BAAN				
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	17M	F04BAAP				
5⁄16″	Chisel	Galv	Plain	Straight Glued Strip	24M	F05BAAP				
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	10M	F06BAA				
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	24M	F06BAAP				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	10M	F08BAAN				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	15M	F08BAAP				
³ ⁄8″	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	F06BGA				



20_{6A} 3/8" Crown Fine Wire Staples

Upholstery, felt, insulation and casebacks										
Length	Point	Finish	Coating	Collation	Box Count	Item Code				
1⁄4″	Chisel	Galv	Plain	Straight Glued Strip	10M	G04BAAN				
3⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	G06BABN				
1⁄2″	Chisel	Galv	Plain	Straight Glued Strip	5M	G08BAB				



20 an 7/16" Crown Fine Wire Staples


Upholstery, felt, insulation and casebacks									
Length	Point	Finish	Coating	Collation	Box Count	Item Code			
³ ⁄8″	Chisel	Galv	Plain	Straight Glued Strip	5M	H06BAA			



17_{GA} 7/16" Crown Heavy Wire Staples*

Furniture frames and crates								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
11⁄4″	Chisel	Bright	Sencote	Glued	21.12M	O15BRBBN		
13⁄8″	Chisel	Bright	Sencote	Glued	17.6M	O16BRBBN		
1½″	Chisel	Bright	Sencote	Glued	17.6M	O17BRBBN		
15⁄8″	Chisel	Bright	Sencote	Glued	17.6M	O18BRBBN		
1¾″	Chisel	Bright	Sencote	Glued	14.08M	O19BRBBN		


*Compatible with NS20XP, NS20BXP, SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.






7/16" Crown Heavy Wire Staples

Length	Point	Finish	Coating	Collation	Box Count	Item Code
3⁄4″	Chisel	Bright	Sencote	Glued	5M	N11BRB
1″	Chisel	Bright	Sencote	Glued	5M	N13BRB
11⁄8″	Chisel	Bright	Sencote	Taped	10M	N14BRB
11⁄4″	Chisel	Bright	Sencote	Taped	10M	N15BRB
13⁄8″	Chisel	Bright	Sencote	Taped	10M	N16BRB
11⁄2″	Chisel	Bright	Sencote	Taped	10M	N17BRB
15⁄8″	Chisel	Bright	Sencote	Taped	10M	N18BRB
1¾″	Chisel	Bright	Sencote	Taped	10M	N19BRB
2″	Chisel	Bright	Sencote	Taped	10M	N21BRB
1⁄2″	Chisel	Galv	Sencote	Glued	5M	N08BABN
1⁄2″	Chisel	Galv*	Sencote	Glued	5M	N08BBBN
1⁄2″	Diverg	Galv*	Sencote	Glued	5M	N08FBB
5⁄8″	Chisel	Galv	Sencote	Glued	5M	N10BAB
3⁄4″	Chisel	Galv	Sencote	Glued	5M	N11BAB
3⁄4″	Diverg	Galv*	Sencote	Glued	5M	N11FBB
7⁄8″	Chisel	Galv	Sencote	Glued	5M	N12BABN
⅔″	Diverg	Galv	Sencote	Glued	5M	N12FABN
1″	Chisel	Galv	Sencote	Glued	5M	N13BAB
1″	Diverg	Galv	Sencote	Glued	5M	N13FAB
11⁄8″	Chisel	Galv	Sencote	Taped	10M	N14BAB
11⁄4″	Chisel	Galv	Sencote	Taped	10M	N15BAB
11⁄4″	Diverg	Galv	Sencote	Glued	10M	N15FAB
13⁄8″	Chisel	Galv	Sencote	Taped	10M	N16BAB
11⁄2″	Chisel	Galv	Sencote	Taped	10M	N17BAB
15⁄8″	Chisel	Galv	Sencote	Glued	10M	N18BAB
1¾″	Chisel	Galv	Sencote	Taped	10M	N19BAB
2″	Chisel	Galv	Sencote	Taped	10M	N21BAB
11⁄4″	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB
11⁄2″	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB
1¾″	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN
2″	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN







*Galvanized High-Tensile Steel

HARDWOOD FLOORING DONE RIGHT

Hardwood floors aren't so hard to install with our SHF2OO stand-up flooring tool. With a long, ergonomic handle and a base that easily adjusts to any floor thickness, you will get your job done in no time. SENCO is committed to creating industry-leading flooring tools to make your job easier.

Tem.

Manue C. S

SENIO

SHF200

2" PNEUMATIC MALLET ACTUATED HARDWOOD FLOORING CLEAT NAILER

ITEM #8D0001N



Features

- Innovative non-marring base that adjusts between $\frac{1}{2}''$ and $\frac{3}{4}''$ flooring without the use of tools
- Safety trigger prevents accidental ejection of fasteners
- Lightweight and well balanced, yet 5% more powerful than competitive flooring nailers
- Extra-long ergonomic handle reduces user fatigue

SLS20XP-HF

3/16" CROWN, 1" ENGINEERED & HARDWOOD FLOOR STAPLER

ITEM #490021N

16_{G/}



Features

- Never-Lube * design no oil required
- Front block easily adjusts to floor thicknessIndustry-exclusive safety controls staple placement
- Power-adjusted motor drives staples to consistent and controllable depth

Product Reference Chart


TOOL SPECS	SHF200	SLS20XP-HF		
Trigger	Sequential	Sequential		
Operating Pressure	90–110 psi (6.2–7.6 bar)	70–120 psi (4.8–8.3 bar)		
Air Consumption (60 CPM)	2.52 scfm	1.92 scfm		
Air Inlet	¼″ NPT	¼″ NPT		
Weight	10.1 lbs (4.58 kg)	3.2 lbs (1.5 kg)		
Height	21.5" (546 mm)	9″ (228 mm)		
Length	17.8" (452 mm)	13" (332 mm)		
Width	3.1" (78 mm)	3″ (76 mm)		
Main Body Material	Aluminum	Aluminum		
Warranty	5 yrs	5 yrs		
FASTENER SPECS	Fasteners are located on page 68			
Gauge	16	19		
Crown	L-Head	³ ⁄16″		
Range	1 ½"-2"	5⁄8″–1″		
Capacity	107	168		
Angled/Collation	Straight Glued Strip	Straight Glued Strip		
Series	RW	R		
FLOORING MATERIAL				
Hardwood	Yes	Yes		
Hardwood Laminate	Yes	Yes		
Board Thickness	½", 5%", 3⁄4", 33⁄32" (12-26 mm)	¼″, ⁵⁄₁₅″, ¾″ (6−10 mm)		

19GA

FLOORING FASTENERS


16 L-Head Flooring Cleat Nails

½", ¾", ¾", ¾", ¾", ¾", ¾", ¾", ¾", ¾", ¾							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
11⁄2″	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW17BPE	
13⁄4″	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW19BPE	
2″	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW21BPE	
2″	Blunt Diamond	Stainless 304	N/A	Straight Glued Strip	1M	RW21BGE	



19 and 3/16" Crown Flooring Staples

¼", %6", ¾" Engineered and hardwood floors								
Length	Point	Finish	Coating	Collation	Box Count	Item Code		
5⁄8″	Chisel	Galv	Sencote	Straight Glued Strip	5M	R10BAB		
3⁄4″	Chisel	Galv	Sencote	Straight Glued Strip	5M	R11BAB		
1″	Chisel	Galv	Sencote	Straight Glued Strip	5M	R13BAB		



Get the Job Done. With genuine SENCO compressors & accessories.

SENCO continuously strives to offer a wide selection of compressors, accessories, and parts to complete our full-line of fastening systems. Our commitment is to bring you the highest quality products to help you get the job done right.



COMPRESSORS

SENCO compressors are made to exacting standards. Only the highest quality components are used to provide the reliability expected from a SENCO product.

AIR HOSES

SENCO offers a wide variety of air hoses that allow you to choose the right solution for your job site. Our NEW Premium Hybrid hose provides the ultimate in flexibility and memory resistance, even in extremely cold temperatures. Quick Couple Rubber Hose is the standard for the professional on the job site with its tough flexible neoprene cover. ProFlex Reinforced Polyurethane Hose is the lightest weight non-marring flexible hose. PVC is resistant to lubricating oils, chemicals, and ultraviolet sunlight.







REGULATORS, GAUGES & LUBRICANTS

SENCO's assortments of regulators, gauges, oils and lubricants are chosen to satisfy the demanding requirements of the job site and deliver professional durability and quality. All will accurately replace the damaged component on SENCO units as well as many others.

PLUGS & COUPLERS

SENCO quick connect coupler and plug fittings are available in the most popular Industrial Interchange styles and sizes. Quick connect couplers are also available in the Universal style to work with other style plugs.





TOOL BELT HOOKS

SENCO offers a variety of belt hooks to allow the professional the ability to use both hands without worrying about dropping their pneumatic tool.

THE INNOVATION YOU'VE COME TO EXPECT, THE QUALITY YOU ALREADY KNOW

Whether you need an air compressor for punch-out jobs or for all-day performance, SENCO offers high quality, reliable options to meet your needs.

KEY FEATURES

SENCO has you covered with industry leading compressors that provide plenty of tank storage and air flow for the job site or professional shop. Many feature an oil-free pump design to reduce maintenance and have integrated panels that provide easy access to control knobs. There's even a compressor equipped with dual couplers so you can run two hoses simultaneously. Count on quickly getting back to work – we offer compressors that have pump up times of less than 40 seconds. You can easily monitor output pressure with individual tank and outlet gauges.

A full line of hoses and accessories is also available.



AIR COMPRESSORS

PC1131

2 HP (RUNNING) 4.3 GALLON TWIN TANK AIR COMPRESSOR



Features

- Cast-iron cylinder for superior pump life
- Compact twin stack tank design
- Heavy-duty induction motor

PC1010

1/2 HP (RUNNING) 1 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

• Ultra-quiet — 68 dBA

- Ultra-light 20 lbs
- Heavy-duty induction motor

Air Compressor Reference Chart

PC0968

1 HP (RUNNING) 2½ GALLON TWIN TANK FINISH AND TRIM AIR COMPRESSOR



Features

- Compact twin stack tank design
- Lightweight 38 lbs
 Heavy-duty induction motor

PC1010N

1/2 HP (RUNNING) 1 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

- Ultra-quiet 68 dBA
- Ultra-light 21 lbs
- Heavy-duty induction motor

PC1280

1½ HP (RUNNING) 6 GALLON FINISH AND TRIM AIR COMPRESSOR



Features

Compact and balanced pancake tank design

- Lightweight 38 lbs
- Dual quick connect couplers

PC0947

2" FINISHPRO®18 BRAD NAILER AND PC1010 COMPRESSOR KIT



- 1 gallon PC1010 compressor
- 2" 18 gauge brad nailer
- Everything you need to get started

Tool Kit Ref. Chart

SPECS	PC1131	PC0968	PC1280	PC1010	PC1010N	KIT SPECS	PC0947
Motor	Induction	Induction	Universal	Induction	Induction	Compressor	PC1010
Amps	14	8	12	4	4	Tool	FinishPro [®] 18
Power Source	115 Volts	115 Volts	115 Volts	115 Volts	115 Volts	Trigger	Contact
SCFM @ 90 PSI	4.4	2.2	2.8	0.7	0.7		Contact
Max PSI	125	135	150	135	135	Tool Operating Pressure	70-95 psi
Weight	60 lbs (27 kg)	38 lbs (17.24 kg)	38 lbs (17.24 kg)	20 lbs (9.07 kg)	21 lbs (9.53 kg)		
Height	14.5" (368 mm)	13.5" (343 mm)	18" (457 mm)	13" (330 mm)	12.25" (311 mm)	Tool Air Inlet	¼″ NPT
Length	20.5" (521 mm)	16" (406 mm)	17" (432 mm)	14" (356 mm)	11.5" (292 mm)	Tool Weight	3 lbs (1.6 kg)
Width	16.5" (419 mm)	15" (381 mm)	16.3" (414 mm)	10" (254 mm)	14" (356 mm)		(1.6 kg) 9.3″
Warranty	1 yr	1 yr	1 yr	1 yr	1 yr	Tool Height	9.3 (238 mm)
FEATURES						Tool Length	9.75″ (248 mm)
Thermal Over- load Protector	Yes	Yes	Yes	Yes	Yes	Kit Warranty	1 yr
Pump	Oil-Lube	Oil-Free	Oil-Free	Oil-Free	Oil-Free	Coil Hose	¼″ x 25′
Pump Up/ Recovery Time	67 sec./16 sec.	82 sec./17 sec.	152 sec./33 sec.	125 sec./30 sec.	125 sec./30 sec.	Air Fittings	Yes
¹ ⁄4" Quick Connect Coupler	1	1	2 (Dual)	1	1	Tool Oil & Safety Glasses	Yes
Regulator	Yes	Yes	Yes	Yes	Yes	Variety Pack of Fasteners	18 Ga. Brads
Individual Tank & Outlet Gauges	Yes	Yes	Yes	Yes	Yes	FASTENERS	
Cold Start Valve	Yes	No	No	No	No	Gauge	18 Ga. Brads
CSA Approved	Yes	Yes	Yes	Yes	Yes	Range	⁵ /8″-2″

FILTERS, REGULATORS, LUBRICANTS, PLUGS, COUPLERS, HOSES, PART KITS AND MORE

SENCO offers an assortment of accessories that are precision engineered to meet the demanding requirements of professionals. Be sure that your tools and compressors are running at peak performance by using SENCO certified replacement parts, accessories, hoses, oils and lubricants.

PC12

07814

Will North

SENCO

SENCO

ENCO



Making Hard Work Easier.

1

int

Tool Lubricant OIL-FREE 2.2 scfm @ 90psi 135 max psi 1.0 hp

101-17 181

ACCESSORIES

Air Hoses

SENCO offers a wide variety of air hoses in various materials, sizes and specifications for your job site.

(FPT) - Female Pipe Thread (MPT) - Male Pipe Thread

Quick Couple Rubber Hose

SENCO's premium air hoses:

- Can handle up to 250 psi working pressure
- Oil-resistant nitrile tube
- Braided textile reinforcing for max strength and kink resistance
- Remains flexible at temperatures from -40° to 200°F
- 4-to-1 working pressure to burst safety factor
- Tough, flexible neoprene cover

	Hose Size	Length	Qty.	ITEM #
Gray with Industrial Interchange Plug and Coupler Fittings	1⁄4″	50 ft	1	PC0064
Gray with Industrial Interchange Plug and Coupler Fittings	1⁄4″	100 ft	1	PC1152
Gray with Industrial Interchange Plug and Coupler Fittings	3⁄8″	50 ft	1	PC0065

ProFlex[™] Reinforced Polyurethane Red Air Hose

Lightest available non-marring flexible hose

- Flexible in all weather (-48° to 150°F)
- Working pressure: 250 psi
- Durable oil and fuel resistant
 MPT-threaded ends

Description	Hose Size	Length	Qty.	ITEM #
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC0977
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC0978
ProFlex [™] with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	50 ft	1	PC0979

Premium Hybrid Polymer Air Hose

• Provides the ultimate in flexibility and memory resistance, even in extreme cold

Offers the best combination of strength and flexibility on the market

Description	Hose Size	Length	Qty.	ITEM #
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC1319
Hybrid with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC1320
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	50 ft	1	PC1321
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	1⁄4″	100 ft	1	PC1322
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	3⁄8″	50 ft	1	PC1339

Field Repairable End Fitting

• Field repairable hose ends are made with aircraft aluminum for easy on-site repair without hose clamps

Description	Hose Size	Qty.	ITEM #
Hybrid Hose Repair End Fitting	1⁄4″	1	PC1341
Hybrid Hose Repair End Fitting	³ ⁄8″	1	PC1337
Hybrid Hose Splicer	1⁄4″	1	PC1338
Hybrid Hose Splicer	³ ⁄8″	1	PC1340



GRAY WITH PLUG & COUPLER PC0064, PC1152, PC0065



PROFLEX WITH MPT ENDS PC0977, PC0978, PC0979







HYBRID HOSE FIELD REPAIR KITS END FITTING AND HOSE SPLICER KITS

Plugs & Couplers

Quick connect plugs and couplers are available in the most popular Industrial Interchange styles. Couplers are also available in Universal style.

Universal Couplers — push plug into coupler (no need to pull back on sleeve)					
Туре	Body Size	NPT Size	Pack Qty.	ITEM #	
Female	1⁄4″	1/4" FPT	1	PC0900	

Plugs — Industrial Interchange							
Туре	Body Size	Size	Pack Qty.	ITEM #			
Male	1⁄4″	1⁄4" MPT	2	PC0479			
Male	1⁄4″	3⁄8″ MPT	2	PC0480			
Female	1⁄4″	1⁄4" FPT	2	PC0477			
Female	1⁄4″	3∕8″ FPT	2	PC0478			
Push-on Barb	1⁄4″	1/4" LHB	1	PC0576			
Push-on Barb	1⁄4″	¾″ LHB	1	PC0577			

Couplers — Industrial Interchange							
Туре	Body Size	Size	Pack Qty.	ITEM #			
Male	1⁄4″	1/4" MPT	1	PC0503			
Male	1⁄4″	3⁄8″ MPT	1	PC0504			
Female	1⁄4″	1/4" FPT	1	PC0501			
Female	1⁄4″	3⁄8" FPT	1	PC0502			
Push-on Barb	1⁄4″	1/4" LHB	1	PC0505			
Push-on Barb	1⁄4″	¾″ LHB	1	PC0506			

74

Swivel Plugs & Couplers

- Allow easier access when working in corners and tight spaces
- Reduce fatigue
- Help prevent kinks and reduce stress on hose
- Provide strong and simple connection for pneumatic tools

Swivel Plugs — Industrial Interchange						
Туре	Body Size	NPT Size	Pack Qty.	ITEM #		
Male	1⁄4″	1/4" MPT	2	PC1323		
Male	1⁄4″	3⁄8" MPT	2	PC1325		

Swivel Couplers — Industrial Interchange					
Туре	Body Size	NPT Size	Pack Qty.	ITEM #	
Female	1⁄4″	1⁄4" FPT	1	PC1328	

Swivel Couplers — Universal						
Туре	Body Size	NPT Size	Pack Qty.	ITEM #		
Female	1⁄4″	¼" FPT	1	PC1330		

(FPT) - Female Pipe Thread (MPT) - Male Pipe Thread

(LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.



PC0900





ACCESSORIES

PLUG (PUSH-ON LOCKING BARB)

PC0479, PC0480

MALE COUPLER

PC0503, PC504



FEMALE COUPLER PC0501, PC0502

COUPLER (PUSH-ON LOCKING BARB) PC0505, PC0506

MALE SWIVEL PLUG

PC1323, PC1325



FEMALE SWIVEL COUPLER PC1328



FEMALE SWIVEL COUPLER PC1330

FEMALE PLUG PC0477, PC0478 MALE PLUG

PC0576, PC0577



ACCESSORIES

Air Hose Accessories

Splicer			
Description	Size	Pack Qty.	ITEM #
Push-On Barbed Hose Splicer	1/4" LHB	2	PC0643

ProFlex Hose Fittings			
Description	Size	Pack Qty.	ITEM #
Brass Hose End	1/4" MPT	1	PC0983
Brass Hose End and Splicer	1/4" MPT	1	PC0987

Air Hose and Compressor Accessories

Tripod Manifold				
Description	Inlet Thread	Outlet Thread	Pack Qty.	ITEM #
3-Way Flat Manifold Industrial Interchange	¼" Plug	1⁄4" Coupler	1	PC1138

ad Pack Qty.	ITEM #
1	PC0489

(FPT) - Female Pipe Thread

Teflon® Thread Sealing Tape		
Description	Pack Qty.	ITEM #
½" x 260' Sealing Tape	1	PC0349

Regulators & Gauges

SENCO's assortment of filters and gauges are precision engineered to meet the demanding requirements of professional contractors. Be sure that your compressor is running at peak performance by using SENCO-certified replacement parts and accessories.

Air Regulation Accessories: Regulator with Gauge					
Description	Max PSI	Max Airflow	FPT Size	NPT Gauge	ITEM #
Mini Regulator with Gauge	250	14 SCFM	1⁄4″	1⁄8″	PC0656
Regulator with Gauge	300	80 SCFM	3⁄8″	1⁄8″	PC0657
Back-Mount Pressure Gauge	160	-	-	1⁄8″	PC0057
Back-Mount Pressure Gauge	160	-	-	1⁄4″	PC0051



PC0643





BRASS HOSE END & SPLICER PC0987











MINI REGULATOR WITH GAUGE PC0656

REGULATOR WITH GAUGE PC0657





BACK-MOUNT PRESSURE GAUGE PC0057

BACK-MOUNT PRESSURE GAUGE PC0051

Oils & Lubricants

Oils and Lubricants				
Description	Features	Size	Case Qty.	ITEM #
Pneumatic Tool Oil (½ pt)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	8 oz	12	PC0101
Pneumatic Tool Oil (1 qt)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	32 oz	12	PC0102
Pneumatic Tool Oil (1 gal)	 Premium-grade oil with high-quality paraffin distillate stock Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive 	128 oz	4	PC0103
Compressor Pump Oil (1 qt)	 Premium-grade oil with high-quality naphthenic distillate stock Recommended for all oil-splash compressors Protects against corrosion Lubricates to extend part life 	32 oz	12	PC0344
Moisture Shield Tool Lubricant (1 qt)	 For use in cold weather and/or high-moisture areas Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog 	32 oz	12	PC1295
Tool Lubricant	 Protects against corrosion Lubricates to extend part life Special additive to minimize exhaust fog 	4 oz	12	YB0123



COMPRESSOR MOISTURE SHIELD TOOL LUBRICANT PUMP OIL TOOL LUBRICANT YB0123 PC0344 PC1295

Safety Glasses & Tool Belt Hooks

Safety Glasses		
Description	Qty.	ITEM #
Wrap-Around Safety Glasses*	10-Case	PC1166

*Filters 99% of UVA and UVB rays. Meets or exceeds ANSI Z87.1 and CE EN 166 safety standards. For indoor and outdoor use.

Tool Belt Hooks			
Description	Size	Qty.	ITEM #
Attaches to ¼" Air Fitting on Tool	Standard	1	PC0350
Attaches to ¼" Air Fitting on Tool	X-Wide	1	PC0629
Attaches to ¾" Air Fitting on Tool	Standard	1	PC0351
Attaches to 3/8" Air Fitting on Tool	X-Wide	1	PC0630

WRAP AROUND PC1166



BELT HOOK PC0351 BELT HOOK PC0630

Extended Length Magazines

Extended Length Magazine for Cordless Pneumatic Framers		
Tool ITEM #		
F-35XP	GA0767	
F-35FRHXP GA0778		



ACCESSORIES

ACCESSORIES

Li-Ion Batteries

For use with 18V Li-lon cordless screwdrivers and cordless pneumatic tools			
18V Li-Ion Battery 2.0 amp hour	For use with		
VB0212		 High-quality reliable cells Charges to 50% in less than 20 minutes and 100% in less than 60 minutes with VB0156 	
18V Li-Ion Battery 3.0 amp hour	DS222-18V DS225-18V		
VB0190	DS322-18V F-15XP F-16XP F-18XP F-18XP F-35XP* F-355RHXP*	 State of the art 21700 cells Charges to 50% in less than 20 minutes and 100% in less than 60 minutes with VB0189 	
18V Li-Ion Battery 4.0 amp hour			
VB0210		 State of the art 21700 cells Charges to 50% in less than 20 minutes and 100% in less than 60 minutes with VB0189 	

Battery Chargers

For use with SENCO batte	ries	
Battery Charger	For use with	
VB0156		 3 amp quick charger Battery charge indicators display charge status of your battery
Battery Charger	VB0155 VB0212	
VB0189	VB0190** VB0210**	SENED
		 5 amp quick charger Upright design is ideal for wall mounting

**The VB0189 charger is recommended for the VB0210 and VB0190 batteries; using the VB0156 charger will result in longer charge times

*For optimal performance only use the VB0190 or VB210 battery with the F-35XP and F-35FRHXP

Replacement No-Mar Pads



Replacement No-Mar Pads Fit	ITEM #
AF25, CF25	HF0064
AF41, CF41	HF0079
FIP11	HC0463
FIP15, FIP18	HC0506
FIP15Mg, FIP18Mg	HC0571
FIP23SXP, 23LXP, 21LXP	HC0729
FIP25XP	HF0064
FIP32*	HC0396
FIP32*	HC0401
FIP41XP, FIP42XP	HF0079
FN55AX	HF0113
FN65DA	HF0110
FP600-650 SERIES	HF0046, HC0253
FP601, FP602, FP651, FP652	HA0170
FP700 SERIES	HF0046, HC0253

Replacement No-Mar Pads Fit	ITEM #
GT65DA	HC0626
GT65RHA	HC0625
GT90CH	HA0200
GT90FRH	HA0201
SCN49	HC0536
SFN30, SFN40, SFNI	HF0079
SLS15, SLS18	HC0507
SLS15Mg, SLS18Mg	HC0572
SLS20, SLS20XP (K, L & R CROWNS)	HF0028
SLS20, SLS20XP (M CROWN)	HF0029
SLS25-L, SLS25XP-L	HF0028

One pad per pack

One pad per pack

*Refer to parts chart to identify desired safety element design

Maintaining Your Tools

SENCO repair kits are designed to provide the parts normally needed to properly maintain and service your SENCO tools.

Tool Model	Description	Item Code	Tool Model	Description	Item Code
FinishPro15, 18, 2N1	Repair Kit	YK0393	SFN1, SKS, SPS	Repair Kit	YK0376
FinishPro15Mg, 18Mg	Repair Kit	YK0780	SFN1, SKS, SPS	Retrofit Kit	YJ0035
FinishPro16XP	Repair Kit A	YK0884	SFN30	Repair Kit	YK0368
FinishPro16XP	Repair Kit B	YK0885	SFT10XP, SFT10XP D/L, SFT10XP LN	Piston Stop Kit	YK0802
Finish Pro 18 BMg	Repair Kit	YK0868	SFT10XP, SFT10XP D/L, SFT10XP LN	Firing System Kit	YK0803
FinishPro21LXP, 23LXP	Repair Kit	YK0855	SFT10XP (AUTO)	Firing System Kit	YK0804
FinishPro23SXP	Repair Kit	YK0854	SFT10XP (AUTO D/L)	Firing System Kit	YK0804
FinishPro25XP	Firing System Kit	YK0281	SFT10XP (AUTO D/L)	Piston Stop Kit	YK0802
FinishPro25XP	Piston Stop Kit	YK0282	SFN1, SKSXP, SPS	Firing System Kit	YK0804
FinishPro32	Repair Kit	YK0394	SFW09	Repair Kit	YK0775
Finish Pro 33 Mg	Repair Kit	YK0787	SFW10XP	Piston Stop Kit	YK0321
FinishPro35Mg	Repair Kit	YK0788	SFW10XP	Firing System Kit	YK0322
FinishPro41XP, 42XP	Firing System Kit	YK0361	SLP20	Repair Kit	YK0373
FinishPro41XP, 42XP	Piston Stop Kit	YK0362	SLS15, SLS18	Repair Kit	YK0393
FramePro601, 602, 651, 652	Repair Kit	YK0360	SLS15Mg, SLS18Mg	Repair Kit	YK0780
FramePro XP 701, 752, 702, 752	Firing System Kit	YK0243	SLS20XP	Repair Kit	YK0372
FramePro XP 701, 752, 702, 752	Piston Stop Kit	YK0244	SLS25XP	Piston Stop Kit	YK0291
HN150, HN250	Repair Kit	BA0158	SLS25XP	Firing System Kit	YK0359
JoistPro150XP	Firing System Kit	YK0823	SLS150Mg	Repair Kit	YK0852
JoistPro150XP	Piston Stop Kit	YK0824	SCP40XP	Firing System Kit	YK0444
JoistPro250XP	Firing System Kit	YK0825	SCP40XP	Piston Stop Kit	YK0445
JoistPro250XP	Piston Stop Kit	YK0826	SN901/902XP, FP325/325FRHXP	Firing System Kit	YK0444
JoistPro250XP	Safety Upgrade Kit	YK0869	SN901/902XP, FP325/325FRHXP	Piston Stop Kit	YK0445
LS1XP	Repair Kit	YK0858	SN951XP, SN952XP	Firing System Kit	YK0444
MW	Repair Kit	YK0371	SN951XP, SN952XP	Piston Stop Kit	YK0768
NS20XP	Firing System Kit	YK0840	SNS40	Repair Kit	YK0374
NS20XP	Piston Stop Kit	YK0841	SNS41	Repair Kit	YK0423
NS20XP	Siding Safety Kit	HC0788	SNS41 (Retrofit Kit)	Cap/Firing Valve	YJ0034
NS20BXP	Firing System Kit	YK0838	SNS41	Driver/Back Plate Upgrade	YK0794
NS20BXP	Piston Stop Kit	YK0839	SNS44XP	Firing System Kit	YK0421
PAL57FXP	Repair Kit	YK0446	SNS44XP	Piston Stop Kit	YK0422
PS15XP, PS15RXP	Repair Kit	YK0784	SNS44XP	Driver/Back Plate Upgrade	YK0793
PS15XP, PS15RXP	Repair Kit	YK0818	SNS45XP	Piston Stop Kit	YK0231
PS15XP, PS15RXP	Block Out Kit	YK883	SNS50XP, SQS55XP	Seal Kit	YK0375
PS15XP	Retrofit Kit – Solid Safety	YJ0044	SNS200XP-BST	Firing System Kit	YK0838
PS15RXP	Retrofit Kit – Solid Safety	YJ0049	SNS200XP-BST	Piston Stop Kit	YK0839
PS20XP	Repair Kit	YK0783	SNS200XP-BST	Wider Driver Kit	YK0873
RoofPro™ 455XP	Firing System Kit	YK0424	SNS200XP	Firing System Kit	YK0840
RoofPro™ 445XP	Repair Kit	YK0865	SNS200XP	Piston Stop Kit	YK0841
RoofPro™ 445XP	Wear Guard Kit	YK0870	SNS200XP	Block-Out Kit	YK0850
RoofPro™ 445XP	Gate Repair Kit	YK0871	SNS200XP	Wider Driver Kit	YK0872
RoofPro™ 455XP	Piston Stop Kit	YK0425	SNS200XP	Siding Safety Kit	HC0748
RoofPro™ 450XP	Repair Kit	YK0426	TN11G1	Repair Kit	YK0888
SC 1	Repair Kit	YK0370	TN11L1, TN21L1	Repair Kit	YK0889
SC 2	Repair Kit	YK0371	WC200XP	Piston Stop Kit	YK0784
SCN48	Repair Kit	YK0769	WC200XP	Repair Kit	YK0783
SCN49	Repair Kit	YK0771	WC200XP	Block-Out Kit	YK0786
SCN60, SCN65	Seal Kit	YK0366	WC200XP	Retrofit Kit - Solid Safety	YJ0037



<u>SENCO</u>

SENCO

SENCO

Download SENCO tool parts charts at www.senco.com to see a complete list of available individual parts.

GUIDE TO CORROSION RESISTANT FASTENERS

BRIGHT BASIC

Bright Basic fasteners are an uncoated steel, which is commonly used in applications where corrosion protection is not required such as interior framing, finish and trim. These fasteners are not recommended for use in treated lumber or exterior applications.

ELECTRO GALVANIZED

Electro Galvanized fasteners have a thin layer of zinc coating that helps corrision resistance in mild weather conditions and in areas with lower humidity. Because of its minimal protective properties these fasteners are recommended for interior use in areas such as kitchens and bathrooms.

HOT DIPPED GALVANIZED

Hot Dipped Galvanized nails have one ounce per square foot of zinc coating. The zinc coating on the nail acts as a barrier between the base steel and the elements, slowing the corrosion process. Ideal for preservative-treated wood and most exterior applications.

304 STAINLESS STEEL

304 Stainless Steel contains 18% chromium and 8% nickel among other elements, making it resist most oxidizing acids and rust. An excellent choice for all types of environments and woods including exotic woods, cedar or redwood.

Recommended use: Exposure to wet conditions regularly and more than 5 miles away from a body of water.

CORROSION RESISTANCE



GOOD CORROSION RESISTANCE

8888

BETTER CORROSION RESISTANCE

88888

BEST CORROSION RESISTANCE S

BOX, CARTON & PALLET QUANTITIES – FASTENERS

Nails (cont.)

Item Code

Boxes Per

Carton

Boxes

Per Skid

Nails Item Code A100509 A100629

A100759 A101009 A101259 A101379 A101509 A102009 A109809 A109909 A201009 A201259 A201509 A202009 A209809 A209909 A301500 A301750 A302000 A302009

A302500 A302509 A402009 AX10EAA AX11EAA AX13EAA AX15EAA AX17EAA AX18EAA AX19EAA AX21EAAN AX22EAAN AY10EAA AY11EAA AY13EAA

AZ08EAA AZ11EAA AZ13EAA BD17APBC

BE23AABF BG17AAAQ BG18AAAQ

BK21BPBFN BK23BPBFN

BK25BPBFN

BL21APBF BT21APBF

CZ08EAAN CZ10EAA CZ10EAAN CZ11EAA

CZ11EAAN CZ13EAA CZ15EAA CZ16EAA CZ17EAA CZ21EAA

DA13EPBN DA15AIA

DA15EABN

DA15EPBN

DA17EABN

DA17EPBN

DA19EABN

DA19EPBN

DA21EABN

DA21EGBN

DA21EPBN

DA23EPBN

DA19AIA

DA17AIA

Nails (cont.)

Boxes Per Carton	Boxes Per Skid	Item Code	Boxes Per Carton	Boxes Per Skid	Item Code
5	900	DA25EAB	3	120	K527APBXN
5	900	DA25EGB	N/A*	80	K527APBXR
5	900	DA25EPB	3	120	K527ASBXN
5	900	ED23AABH	N/A*	60	K528APBXN
5	900	EJ21ADBH	N/A*	40	K528APBXR
5	900	EJ23ADBH	N/A*	40	K528ASBXN
5	900 900	EJ23ASBC EL19AGBH	N/A*	24 60	K529APBXN K627ASBXN
5	900	EL19AGBH	N/A* N/A*	60	K628APBXN
5	900	EL20AABH	N/A*	60	K628ASBXN
5	700	EL20ASBH	N/A*	60	K629ASBXN
5	700	EL21AGBH	N/A*	60	KC27AGBK
5	700	EL21ASBH	N/A*	60	KC27APBX
5	700	EL23AABH	N/A*	60	KC27ASBX
5	700	EL23AGBH	N/A*	60	KC28AGBK
5	700	EL23ASBC	N/A*	24	KC28APBX
5	480	EL23ASBH	N/A*	60	KC28ASBX
5	480	G524APBXN	N/A*	72	KC29APBX
5	480	G524ASBXN	N/A*	72	KC29ASBX
5	480	G621ASBXN	N/A*	80	KC31APBX
5	480	G624APBXN	N/A*	72	KD25AABS
5	480	G624ASBXN	N/A*	72	KD25APBF
5	480	GC21APBX	N/A*	80	KD25APBSN
16 16	480 480	GC23AHAK GC24APBX	N/A* N/A*	80 72	KD27APBF KD27APBSN
16 10	300	GC24APBX GC24ASBX	N/A*	72	KD27APBSN KD27ASBF
10	300	GC25APBX	N/A*	72	KD27ASBS
8	240	GD21AABF	N/A*	40	KD28AGBS
8	240	GD21APBF	N/A*	40	KD28APBF
6	180	GD24APBSN	N/A*	48	KD28APBSN
6	180	GD24ASBS	N/A*	45	KD28ASBF
6	180	GD25AABF	N/A*	40	KD28ASBS
16	480	GD25AABSN	N/A*	48	KD29APBF
16	480	GD25APBF	N/A*	40	KD29APBSN
10	300	GD25APBSN	N/A*	48	KD29ASBS
32	960	GE21APAX	N/A*	80	KJ17AEBD
24	720	GE21ASBX	N/A*	80	KJ17AHBD
16	480	GE24AGBK	N/A*	80	KT25APBF
N/A*	24	GE24APBX	N/A*	72	LC29APBX
N/A* N/A*	45 40	GE24ASBX GL21APBF	N/A* N/A*	72 40	M001000 M001001
N/A*	40	GL21APBSN	N/A*	40	M001002
N/A*	35	GL21ASBS	N/A*	45	M001003
N/A*	35	GL24AABSN	N/A*	48	M001004
N/A*	35	GL24AGBF	N/A*	24	M001005
N/A*	45	GL24AGBS	N/A*	72	M001007
N/A*	45	GL24APBF	N/A*	40	M002261
N/A*	140	GL24APBSN	N/A*	48	M002262
24	1440	GL24ASBF	N/A*	40	M002263
N/A*	140	GL24ASBS	N/A*	45	M002264
24	1152	GT24APBF	N/A*	40	M002265
N/A*	140	H527APBXN	N/A*	48	M002266
12	720	H528APBXN	N/A*	48	M003011
12	720	H627APBXN	N/A*	48 48	M003101 M003103
12 12	720 720	H627ASBXN HC27APBX	N/A* N/A*	48	M003103
12	576	HC27APBX HC27ASBX	N/A*	48	M003104
5	200	HC28APBX	N/A*	48	M003106
5	200	HD27APBF	N/A*	40	MD17AJBDN
5	200	HD27APBSN	N/A*	48	MD17AQBD
5	200	HE27ASBX	N/A*	48	MD25AHBD
5	200	HF27EDB	N/A*	80	MD25AJBDN
5	200	HF27EPAK	N/A*	40	MD25AQBDN
5	200	HJ25ADBS	N/A*	45	MD27APBSN
4	160	HK27APBFN	N/A*	35	MD28APBSN
4	160	HL27AGBS	N/A*	54	MD34APBF
4	160	HL27ASBF	N/A*	40	ND25AJBDN
4	160	HL27ASBS	N/A*	40	ND25AQBDN
N/A*	90	HR22APAF	N/A*	40	P13BGBN
4	160	HR74APAF	N/A*	40	RW19BPE
	120	K525APBXN	N/A*	72	RW21BGE
in the item b	ox, not in a r	naster shipping carton.			

	Curton	i ci olitita
527APBXN	N/A*	48
527APBXR	N/A*	80
527ASBXN	N/A*	48
528APBXN	N/A*	48
528APBXR	N/A*	80
528ASBXN	N/A*	48
529APBXN	N/A*	48
627ASBXN	N/A*	48
528APBXN	N/A*	48
628ASBXN	N/A*	48
629ASBXN	N/A*	48
C27AGBK	N/A*	80
C27APBX	N/A*	48
C27ASBX	N/A*	48
C28AGBK	N/A*	80
C28APBX	N/A*	48
C28ASBX	N/A*	48
C29APBX	N/A*	48
C29AFBX	N/A*	48
C31APBX	N/A*	40
D25AABS	N/A*	40
D25AAB5 D25APBF	N/A*	45
D25APBSN D27APBF	N/A* N/A*	48 40
D27APBF D27APBSN	N/A* N/A*	40
	,	
D27ASBF	N/A*	24
D27ASBS	N/A*	40
D28AGBS	N/A*	54
D28APBF	N/A*	40
D28APBSN	N/A*	48
D28ASBF	N/A*	24
D28ASBS	N/A*	40
D29APBF	N/A*	40
D29APBSN	N/A*	48
D29ASBS	N/A*	40
J17AEBD	N/A*	100
J17AHBD	3	900
T25APBF	N/A*	40
C29APBX	N/A*	48
001000	20	960
001001	16	768
001002	6	480
001003	6	480
001004	6	384
001005	6	384
001007	6	288
002261	N/A*	100
002262	N/A*	100
002263	N/A*	100
002264	N/A*	100
002265	N/A*	100
002266	N/A*	100
003011	N/A*	24
003101	N/A*	56
003103	N/A*	56
003104	N/A*	48
003105	N/A*	40
007100	N1/A*	40

N/A*

10

10

40

96

96

100

96

96

36

36

36

96

96

60

510

510

Nails (cont.)

`		
Item Code	Boxes Per Carton	Boxes Per Skid
RW17BPE	10	510
RW19BPE	10	510
RW21BGE	10	510
RW21BPE	10	510
SE15APB	N/A*	40
SE15APBH	N/A*	40
SE17APBH	N/A*	40
SE19APB	N/A*	40
W3050YXS	5	250
W3075YXC	5	250
W3100YXC	5	250
W3125YXC	5	250
W3150YXC	5	250
ZX10EAA	12	720
ZX13EAA	12	576
ZX16EAA	10	360
ZX18EAA	10	360
ZX21EAA	10	240

Staples

Item Code	Boxes Per Carton	Boxes Per Skid
A04BAAN	48	1152
A06BABN	6	216
A06BABP	8	192
A08BAB	12	288
A08BABP	8	192
A800629	5	600
A800759	5	600
A801009	5	600
A801259	5	600
A801509	5	600
A809909	5	600
B04BAAPN	8	192
B06BAAP	4	96
B08BAAP	4	96
C02BAAPN	8	192
C03BAAPN	8	192
C03BGAN	8	272
C04BAAP	8	192
C04BGAN	8	272
C05BAAPN	8	192
C06BAAP	4	96
C06BGA	20	480
C06BHA	20	640
C07BAAPN	4	96
C08BAAP	4	96
C10BAAP	4	96
D10BABN	6	216
D10BABPN	8	192
E06BAA	20	640
E08BAA	16	512
E10BAA	25	800
F04BAAN	12	384
F04BAAP	8	192
F05BAAP	4	96
F06BAA	10	300
F06BAAP	4	96
F06BGA	10	300
F08BAAN	8	240
F08BAAP	4	96
G04BAAN	24	480
G06BABN	25	800
G08BAB	20	640
HO6BAA	20	480
JO6BAA	12	216
JOSBAAN	9	288
JIOBAAN	8	160
K11BAB	6	240
NIDAD	0	240

*Product is shipped in the item box, not in a master shipping carton.

BOX, CARTON & PALLET QUANTITIES – FASTENERS

Staples (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
K12BAB	10	400
K13BABN	12	384
LO6BAB	10	360
L07BABP L08BAB	N/A* 8	112 288
L10BABN	12	432
L10BHA	12	432
L10HABN	12	432
L11BAB	10	360
L11BGA L11BRB	10 10	360 360
LIIBRB	10	360
L11HBB	10	360
L12BAB	10	360
L12BQB	10	360
L13BABN	8	288
L13BRBN L13BRBP	8 N/A*	288 36
LI3BRBP LI3HABN	N/A 8	288
L14BAB	6	216
L14BGA	6	216
L14BRB	6	216
L15BAB	6	216
L15BRB L17BAB	6 6	216 216
M06BABN	7	210
M08BAB	6	192
M10BABN	9	288
M10BRBN	9	288
M11BABN	8	256
M11BRBN M12BAB	8	256 192
MI3BAB	6	192
M13BRB	6	192
M15BAB	N/A*	60
M17BAB	N/A*	48
M004092	N/A*	180
N08BABN N08BBBN	6 6	192 192
NO8FBB	6	192
N10BAB	6	192
N11BAB	6	192
N11BRB	6	192
N11FBB	6	192
N12BABN N12FABN	6 5	192 160
N13BAB	4	128
N13BRB	4	128
N13FAB	4	128
N14BAB	N/A*	56
N14BRB	N/A*	56 56
N15BAB N15BGB	N/A* N/A*	165
N15BRB	N/A*	56
N15FAB	N/A*	56
N16BAB	N/A*	56
N16BRB	N/A*	56
N17BAB	N/A* N/A*	48 165
N17BGB N17BRB	N/A* N/A*	48
N18BAB	N/A*	48
N18BRB	N/A*	48
N19BAB	N/A*	40
N19BGBN	N/A*	130
N19BRB	N/A*	40
N21BAB N21BGBN	N/A* N/A*	40 120
N21BRB	N/A*	40
O15BRBBN	N/A*	56
O16BRBBN	N/A*	70
O17BRBBN	N/A*	56

Staples (cont.)

	· · ·	
Item Code	Boxes Per Carton	Boxes Per Skid
O18BRBBN	N/A*	56
O19BRBBN	N/A*	56
P06BAA	N/A*	60
P08BABT	N/A*	60
P10BAB	N/A*	60
P10BPE	N/A*	60
P10FAB	N/A*	60
P11BAB	N/A*	50
P11BPE	N/A*	50
P12BAB	N/A*	40
P13BAB	N/A*	40
P13BGBN	N/A*	60
P13BPE	N/A*	40
P15BAB	N/A*	30
P15BPE	N/A*	30
P17BAB	N/A*	30
P19BAB	N/A*	40
P21BAB	N/A*	40
Q15BAB	N/A*	64
Q17BAB	N/A*	64
Q17BRB	N/A*	64
Q19BAB	N/A*	64
Q19BGBN	N/A*	130
Q19BRB	N/A*	64
Q21BAB	N/A*	56
Q21BRB	N/A*	56
Q23BRB	N/A*	48
Q25BAB	N/A*	48
Q25BRB	N/A*	48
R08BAB	12	384
R10BAB	12	480
R11BAB	12	480
R13BAB	12	480
W10BAB	10	400

Staples — Specialty

item Code	Boxes Per Carton	Boxes Per Skid
X04NRA	N/A*	224
X06NRA	N/A*	224
X08NRA	N/A*	224
Y05BFA	10	320
Y07BFA	8	256
Y09BFAN	6	180

Screws

ltem Code	Boxes Per Carton	Boxes Per Skid
06A125P	6	144
06A125PB	N/A*	72
06A162P	6	144
06A162PB	N/A*	72
06A162W	6	144
06B125P	6	144
06B125PB	N/A*	72
06B162P	6	144
06B162PB	N/A*	72
06B200PB	N/A*	48
06C125CB	N/A*	72
06C125PB	N/A*	72
06C125WK	6	240
06C162CB	N/A*	72
06C162PB	N/A*	72
06C162WK	6	240
06C200CB	N/A*	48
06C200PB	N/A*	48
07A200P	6	144

Screws (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
07Q100PB	N/A*	72
07Q125PBQ	N/A*	72
08A250PK	6	192
08C300WK	6	144
08D175W	6	144
08D200W	6	144
08D250S	6	144
08D250W	6	144
08D250WK	6	192
08D300W	6	144
08D300WK	6	144
08F150Y	6	144
08F150YTK	6	240
08F175Y	6	144
08F175YTK	6	240
08F200Y	6	144
08F200YBTHSS	N/A*	48
08F200YTK	6	192
08F250Y	6	192
08F250YK	6	192
08F300Y	6	192
08G100CBWFDS	N/A*	72
08G150CTLDSS		144
08G162CTWFWS	6	144
08G200CKLFPS 08G200WTWFWS	6	192 144
	6	
08G250WWK	6	192
08L125CBLCTS	N/A*	72
08L175YB	N/A*	72
08M050CTRFDP	6	144
08M050CTRFSP	6	144
08M100CBPDSS	N/A*	72
08R250W	6	144
08R300W	6	144
08S250W003	6	144
08S250W497	6	144
08S250W592	6	144
08T125W	6	144
08T150WBWFDS	N/A*	72
08T200W	6	144
08X125CBACTS	N/A*	72
08X125CKADDS	6	240
08X200CKADDS	6	192
09D300S	6	144
10G125CBWFDS	N/A*	72
10G162CTWFWS	6	144
10M075CDK	6	240
10M075CSK	6	240
10M075CTMFDS	6	144
10M075YKFT4X	6	240
10M075YLFT4X	N/A*	48
10M075YTFFDX	6	144
10M100CKMFDS	6	240
12G175YKLFAX	6	240
12G200YKLFCX	6	192
12G250YKLFCX	6	192
1202301 KLFCA	6	240
12M1007TKFF4X	6	240
121-11UUTKFF3X	0	240

81

*Product is shipped in the item box, not in a master shipping carton.

ITEM CODE INDEX

Tools: DURASPIN® (Cordless)

Model	Item #	Page
DS222-18V - 2" Cordless 18v Li-Ion 2500 RPM	10B0002N	3
DS225-18V - 2" Cordless 18v Li-Ion 5000 RPM	10A0002N	3
DS322-18V - 3" Cordless 18v Li-Ion 2500 RPM	10C0002N	3

Tools:

DURASPIN® (Corded)

Model	ltem #	Page
DS242-AC - 2" Corded 2500 RPM	10E0001N	4
DS245-AC - 2" Corded 5000 RPM	10D0001N	4
DS342-AC - 3" Corded 2500 RPM	10F0001N	4
SG2510 - High-Performance 2500 RPM Screwdriver	6X0002N	7
SG4100 - High-Performance 4000 RPM Screwdriver	6X0004N	7

DURASPIN® (Attachments)

Model	item #	Page
DS230-D1 - 2" Auto-Feed Screwdriver Attachment	9Z0011N	5
DS230-D2 - 2" Auto-Feed Screwdriver Attachment	9Z0012N	5
DS230-M1 - 2" Auto-Feed Screwdriver Attachment	9Z0021N	5
DS230-S1 - 2" Auto-Feed Screwdriver Attachment	9Z0001N	5
DS530-D1 - 3" Auto-Feed Screwdriver Attachment	10X0012N	6
DS530-M1 - 3" Auto-Feed Screwdriver Attachment	10X0022N	6
DS530-S1 - 3" Auto-Feed Screwdriver Attachment	10X0002N	6

Tools: DURASPIN® (Attachment Kits)

Model	Item #	Page
DS532-AC - 3" Attachment Kit with 2500 RPM Screwdriver	10X0003N	6
DS534-AC - 3" Auto-Feed Screwdriver Attachment	10X0013N	6

Tools:

Pneumatic

Model	Item #	Page
A11 - 7/16" Crown 3/6" Hammer Stapler	PC0700	50
A20 Hand Nailer - 2" – 7" Bulk Nailer	PC0781	35
BC58 - ½" Crown 5%" Staple + 1" Cap	4A0001N	50
DFPXP - 20 GA. ½" Crown, ½" Staple Clinch Tool	8H0001N	56
F-15XP - 2½" 15 GA. Cordless Pneumatic Finish Nailer	10L0001N	15
F-16XP - 2½" 16 GA. Cordless Pneumatic Finish Nailer	10N0001N	15
F-18XP - 21/8" 18 GA. Cordless Pneumatic Brad Nailer	10M0001N	15
F-35FRHXP - Cordless Pneumatic Framing Nailer	10H0002N	31
F-35XP - Cordless Pneumatic Framing Nailer	10G0002N	31
F75LXP - 18 GA. 7/16" Crown, 5/8" Staple Clinch Tool	8J0002N	56
F75SXP - 18 GA. 7/16" Crown, 5/8" Staple Sisal Anvil	8J0001N	56
FinishPro*16XP - 21/2" Finish Nailer	9S0001N	18
FinishPro*18BMg - 21/8" Brad Nailer	9B0001N	17
FinishPro*18Mg - 21/8" Brad Nailer	1U0021N	17
FinishPro*25XP - 21/8" Brad Nailer	760102N	18
FinishPro*30XP - 2" Angled Finish Nailer	9P0002N	19
FinishPro*35Mg - 2½" Angled Finish Nailer	6G0001N	19
FinishPro*42XP - 21/2" Angled Finish Nailer	4G0001N	19
F-LXP - 11/2" 18 GA. 1/4" Crown Cordless Pneumatic Finish Stapler	10Y0001N	15
FN81T1 - 3½" Full Round Head Framing Nailer	FN81T1	32
FN91T1 - 3½" Paper Tape Framing Nailer	FN91T1	32
FramePro®325FRHXP - 3¼" Full Round Head Framing Nailer	4H0101N	34
FramePro*325XP - 3¼" Paper Tape Framing Nailer	4Z0101N	33
FramePro*701XP - 3½" Paper Tape Framing Nailer	2H0133N	33
FramePro*702XP - 31/2" Full Round Head Framing Nailer	2K0103N	34
FramePro*751XP - 3½" Paper Tape Framing Nailer	2J0103N	33
FramePro*752XP - 3½" Full Round Head Framing Nailer	2F0103N	34
JN91H1 - 11/2" Metal Connector Nailer	JN91H1	36

Tools:

Pneumatic (cont.)

Model	ltem #	Page
	10101112	76
JN91H2 - 1½" Metal Connector Nailer JN91P1 - 1½"-2½" Metal Connector Nailer	JN91H2 JN91P1	36 36
JN91P2 - $1/2$ - $2/2$ Metal Connector Nailer	JN91P2	36
LS1XP - 1" Headless Brad Nailer	8N0001N	17
Mini Hand Nailer - 2"-3½" Bulk Nailer	PC1195	35
NS20BXP - 7/16" Crown, Heavy Wire Stapler	9Y0001N	38, 62
NS20XP - 7/16" Crown, 2" Heavy Wire Stapler	9X0001N	38
PalletPro™100XP - 4" Coil Nailer (Special Order Tool)	5L0001N	55
PalletPro™130XP - 5¼" Coil Nailer (Special Order Tool)	5M0001N	55
PalletPro™57FXP - 2¼" Coil Nailer	4L0001N	55
PS15RXP - 1" Crown 1½" Roofing Stapler	9U0001N	50
PS15XP - 1" Wide Crown, 1½" Heavy Wire Stapler	9T0001N	37
PS20XP - 1" Wide Crown, 2" Heavy Wire Stapler	9W0001N	37
RoofPro™445XP - 1¾" Coil Nailer	8V0001N	49
SCIXP Senclamp* - 7/16" Crown, %6" Senclamp* Fastener	220101N	22
SC2 Sencor [®] - 1" Crown, ½" Corrugated Stapler	470001N	22
SCN60XP - 2 ³ / ⁴ Coil Nailer	520101N 540101N	35 35
SCN65XP - 3 ¹ / ₂ " Coil Nailer (Flat Safety) SCN65XP - 3 ¹ / ₂ " Coil Nailer (Toenail Safety)	540101N 540104N	35
SCP40XP - 1/2" Standard Pressure Pneumatic Concrete & Steel Pinner	7.J0001N	35
SFT10XP 20 GA. E Wire - Standard	6S0031N	61
SFT10XP 20 GA. F Wire - Standard	6S0041N	61
SFT10XP 20 GA. G Wire - Standard	6S0051N	61
SFT10XP 22 GA C Wire - Standard	6S0021N	61
SFT10XP 22 GA. A/D Wire - Auto	6S0101N	61
SFT10XP 22 GA. A/D Wire - Standard	6S0001N	61
SFT10XP 22 GA. B Wire - Standard	6S0011N	61
SFT10XP 22 GA. C Wire - Auto	6S0121N	61
SFT10XP Dbl. Length Mag. 20 GA. F Wire - Auto	6S0341N	61
SFT10XP Dbl. Length Mag. 20 GA. G Wire - Standard	6S0251N	61
SFT10XP Dbl. Length Mag. 20 GA. H Wire - Auto	6S0361N	61
SFT10XP Dbl. Length Mag. 22 GA. B Wire - Auto	6S0311N	61
SFT10XP Dbl. Length Mag. 22 GA. B Wire - Standard	6S0211N	61
SFT10XP Dbl. Length Mag. 22 GA. C Wire - Auto	6S0321N	61
SFT10XP Dbl. Length Mag. 22 GA. C Wire - Standard	6S0221N	61
SFT10XP Long Nose 22 GA. C Wire - Standard	6S0421N	61
SFW09 - ³ / ₆ " Crown, ⁵ / ₆ " Fine Wire Stapler	4C0001N	62
SHF200 - 2" Pneumatic Mallet Actuated Flooring Cleat Nailer	8D0001N	67
SKSXP-L Stapler	300120N	20 20
SKSXP-M Stapler SKSXP-N Stapler	300152N 300184N	20
SLP20XP - 1%" Brad Nailer	430101N	18
SLS150MG - ¼" Crown, 1%6" Medium Wire Stapler	8C0001N	21
SLS18MG - ¼" Crown, 1½" Medium Wire Stapler	1W0021N	21
SLS20XP-HF - 3/6" Crown, 1" Floor Stapler	490021N	67
SLS20XP-K Stapler	490101N	20
SLS20XP-L Stapler	490103N	20
SLS20XP-L Sencomatic Stapler	490015N	20
SLS20XP-L Stapler With Case	490105N	20
SLS20XP-M Stapler	490107N	20
SLS20XP-R Stapler	490111N	20
SLS25XP-L Stapler	820103N	20
SLS25XP-M Stapler	820107N	20
SN71P1 - 2½" Coil Nailer	SN71P1	49
SNS41 - 7/16" Crown, 2" Heavy Wire Stapler	3L0003N	38
SQS55XP - 7/16" Crown, 2½" Heavy Wire Stapler	660101N	38
TN11G1 - 1¾" Headless Pinner	TN11G1	16
TN11L1 - 2" Headless Pinner	TN11L1	16
TN21L1 - 2" Pinner	TN21L1	17

Tools:

Compressors & Kit

Model	Item #	Page
PC0947	PC0947	71
PC0968	PC0968	71
PC1010	PC1010	71
PC1010N	PC1010N	71
PC1131	PC1131	71
PC1280	PC1280	71

ITEM CODE INDEX

Page

23

23 23

23

23

23

23

23

23 23

23

23

23 23

23

23

25 25

25

25 25

25

24

23 23

23

23

23

23 23

23

23

24

24

24

24

24

24

51

43, 58

44

44

44, 59

44, 59

44, 59 43, 58

42, 43, 58 23

> 23 23

> 23

23

23

23

23

23

23

25

25

25

25

25

25

25

25

25

25 25

25 25

25

25

Fasteners: Nails

Item #

A100509

A100629

A100759 A101009

A101259

A101379

A101509

A102009

A109809

A109909 A201009

A201259

A201509

A202009 A209809

A209909

A301500

A301750 A302000

A302009

A302500 A302509

A402009

AX10EAA

AX11EAA AX13EAA

AX15EAA

AX17EAA

AX18EAA

AX19EAA AX21EAAN

AX22EAAN

AY10EAA

AY11EAA

AY13EAA

AZ08EAA

AZ11EAA

AZ13EAA

BD17APBC

BE23AABF

BG17AAAQ

BG18AAAQ

BK21BPBFN

BK23BPBFN

BK25BPBFN

BL21APBF BT21APBF

CZ08EAAN CZ10EAA

CZ10EAAN CZ11EAA

CZ11EAAN

CZ13EAA

CZ15EAA

CZ16EAA

CZ17EAA

CZ21EAA

DA13EPBN

DA15AIA

DA15EABN

DA15EPBN

DA17AIA

DA17EABN

DA17EPBN

DA19AIA

DA19EABN

DA19EPBN

DA21EABN DA21EGBN

DA21EPBN DA23EPBN

DA25EAB

Fasteners: Nails (cont.)

	ltem #	Page
	DA25EGB	25
	DA25EPB	25
	ED23AABH	51, 57
	EJ21ADBH	51, 57
	EJ23ADBH	51
	EJ23ASBC	51
	EL19AGBH	52, 58
	EL19ASBH	52, 58
	EL20AABH	52, 58
	EL20ASBH	52, 58
	EL21AGBH	52, 58
	EL21ASBH	52, 58
	EL23AABH	52, 58
	EL23AGBH	52, 58
	EL23ASBC	52
	EL23ASBH	52, 58
	G524APBXN	39
	G524ASBXN	39
	G621ASBXN	39
	G624APBXN G624ASBXN	39
	G624ASBXN GC21APBX	39 40
	GC2IAPBX GC23AHAK	40
	GC23AHAK GC24APBX	40
	GC24APBX GC24ASBX	40
	GC25APBX	40
	GD21AABF	40
	GD21APBF	43, 57
	GD24APBSN	41
	GD24ASBS	41
	GD25AABF	43, 57
	GD25AABSN	41
	GD25APBF	43, 57
	GD25APBSN	41
	GE21APAX	40
	GE21ASBX	40
	GE24AGBK	40
	GE24APBX	40
	GE24ASBX	40
	GL21APBF	43, 58
	GL21APBSN	42
	GL21ASBS	42
	GL24AABSN GL24AGBF	42
	GL24AGBF GL24AGBS	43, 58 42
	GL24AGB3	42 43, 58
	GL24APBP GL24APBSN	43, 56
	GL24APBSN GL24ASBF	42 43, 58
	GL24ASBS	42
	GT24APBF	42, 58
	H527APBXN	39
	H528APBXN	39
	H627APBXN	39
	H627ASBXN	39
	HC27APBX	40
	HC27ASBX	40
	HC28APBX	40
	HD27APBF	43, 57
	HD27APBSN	41
	HE27ASBX	40
	HF27EDB	40
	HF27EPAK	40
	HJ25ADBS	41
	HK27APBFN	44, 59
	HL27AGBS	42
	HL27ASBF	43, 58
	HL27ASBS HR22APAF	42 44
	HR74APAF	44
	K525APBXN	39
	K525APBAN K527APBXN	39
	K527APBXR	39
-		-

Fasteners: Nails (cont.)

ltem #	Page
K527ASBXN	39
K528APBXN	39
K528APBXR	39
K528ASBXN K529APBXN	39 39
K627ASBXN	39
K628APBXN	39
K628ASBXN	39
K629ASBXN	39
KC27AGBK KC27APBX	40 40
KC27ASBX	40
KC28AGBK	40
KC28APBX	40
KC28ASBX KC29APBX	40 40
KC29APBX KC29ASBX	40
KC31APBX	40
KD25AABS	41
KD25APBF	43, 57
KD25APBSN KD27APBF	41 43, 57
KD27APBF	43, 57
KD27ASBF	43, 57
KD27ASBS	41
KD28AGBS	41
KD28APBF	43, 57
KD28APBSN KD28ASBF	41 43, 57
KD28ASBS	43, 37
KD29APBF	43, 57
KD29APBSN	41
KD29ASBS	41
KJ17AEBD KJ17AHBD	45 45
KT25APBF	42, 58
LC29APBX	40
M001000	24
M001001 M001002	24 24
M001002	24
M001004	24
M001005	24
M001007	24
M002261	45 45
M002262 M002263	45
M002264	45
M002265	45
M002266	45
M003011 M003101	44
M003101 M003103	51 51
M003104	51
M003105	51
M003106	51
MD17AJBDN	45
MD17AQBD MD25AHBD	45 45
MD25AJBDN	45
MD25AQBDN	45
MD27APBSN	41
MD28APBSN	41
MD34APBF ND25AJBDN	43, 57 45
ND25AJBDN	45
P13BGBN	53
RW17BPE	68
RW19BPE	68
RW21BGE RW21BPE	68 68
SE15APB	52
22.07.17.25	

Fasteners: Nails (cont.)

Item #	Page
SE15APBH	52, 58
SE17APBH	52, 58
SE19APB	52
W3050YXS	45
W3075YXC	45
W3100YXC	45
W3125YXC	45
W3150YXC	45
ZX10EAA	23
ZX13EAA	23
ZX16EAA	23
ZX18EAA	23
ZX21EAA	23

Fasteners: Staples

Item #	Page
A04BAAN	63
A06BABN	63
A06BABP	63
A08BAB	63
A08BABP	63
A800629	27
A800759	27
A801009	27
A801259	27
A801509	27
A809909	27
B04BAAPN	63
B06BAAP	63
B08BAAP	63
C02BAAPN	63
C03BAAPN	63
C03BGAN	63
C04BAAP	63
C04BGAN	63
C05BAAPN	63
C06BAAP	63
C06BGA	63
C06BHA	63
C07BAAPN	63
CO8BAAP	63
C10BAAP	63
D10BABN	63
D10BABPN	63
E06BAA	64
E08BAA	64
E10BAA	64
F04BAAN	64
F04BAAP	64
F05BAAP	59, 64
F06BAA	59, 64
F06BAAP	59, 64
F06BGA	59, 64
F08BAAN	59, 64
F08BAAP	59, 64
G04BAAN	64
G06BABN	64
G08BAB	64
HO6BAA	53, 64
JO6BAA	59
JO8BAAN	59
JIOBAAN	59
K11BAB	26
K12BAB	26
K13BABN	26
LO6BAB	20
LO7BABP	27
LO8BAB	27
	_,

Fasteners: Staples (cont.)

Item #	Page
L10BABN	27
L10BHA	27
L10HABN	27 27
L11BAB L11BGA	27
L11BRB	27
L11HAB	27
L11HBB	27
L12BAB	27
L12BQB L13BABN	27 27
LI3BABN	27
L13BRBP	27
L13HABN	27
L14BAB	27
L14BGA	27
L14BRB L15BAB	27 27
L15BRB	27
L17BAB	27
M06BABN	28
M08BAB	28
M10BABN M10BRBN	28 28
MIIBABN	28
M11BRBN	28
M12BAB	28
M13BAB	28
M13BRB	28
M15BAB M17BAB	28 28
M004092	53
N08BABN	28, 47, 65
N08BBBN	28, 47, 65
N08FBB	28, 47, 65
N10BAB N11BAB	28, 47, 65 28, 47, 65
N11BRB	28, 47, 65
N11FBB	28, 47, 65
N12BABN	28, 47, 65
N12FABN	28, 47, 65
N13BAB N13BRB	28, 47, 65 28, 47, 65
N13FAB	28, 47, 65
N14BAB	28, 47, 65
N14BRB	28, 47, 65
N15BAB	28, 47, 65
N15BGB N15BRB	28, 47, 65 28, 47, 65
N15FAB	28, 47, 65
N16BAB	28, 47, 65
N16BRB	28, 47, 65
N17BAB	28, 47, 65
N17BGB N17BRB	28, 47, 65 28, 47, 65
N18BAB	28, 47, 65
N18BRB	28, 47, 65
N19BAB	28, 47, 65
N19BGBN	28, 47, 65
N19BRB	28, 47, 65
N21BAB N21BGBN	28, 47, 65 28, 47, 65
N21BRB	28, 47, 65
O15BRBBN	46, 65
O16BRBBN	46, 65
O17BRBBN	46, 65
O18BRBBN O19BRBBN	46, 65 46, 65
PO6BAA	46, 65
PO8BABT	46, 53
P10BAB	46, 53

P10BAB

P10BPE

46, 53

46, 53

Fasteners: Staples (cont.)

item #	Page
P10FAB	46, 53
P11BAB	46, 53
P11BPE	46, 53
P12BAB	46, 53
P13BAB	46, 53
P13BGBN	46
P13BPE	46, 53
P15BAB	46, 53
P15BPE	46, 53
P17BAB	46, 53
P19BAB	46
P21BAB	46
Q15BAB	47
Q17BAB	47
Q17BRB	47
Q19BAB	47
Q19BGBN	47
Q19BRB	47
Q21BAB	47
Q21BRB	47
Q23BRB	47
Q25BAB	47
Q25BRB	47
R08BAB	26
R10BAB	26, 68
R11BAB	26, 68
R13BAB	26, 68
W10BAB	63

Fasteners: Staples — Specialty

Item #	Page		
X04NRA	29		
X06NRA	29		
X08NRA	29		
Y05BFA	29		
Y07BFA	29		
Y09BFAN	29		

Fasteners: Screws

item #	Page			
06A125P	8			
06A125PB	8			
06A162P	8			
06A162PB	8			
06A162W	8			
06B125P	8			
06B125PB	8			
06B162P	8			
06B162PB	8			
06B200PB	8			
06C125CB	8			
06C125PB	8			
06C125WK	8			
06C162CB	8			
06C162PB	8			
06C162WK	8			
06C200CB	8			
06C200PB	8			
07A200P	8			
07Q100PB	9			
07Q125PBQ	9			
08A250PK	9			
08C300WK	8			
08D175W	8			

Fasteners: Screws (cont.)

)		
Item #	Page		
08D200W	9		
08D250S	9		
08D250W	9		
08D250WK	9		
08D300W	9		
08D300WK	9		
08F150Y	8		
08F150YTK	8		
08F175Y	8		
08F175YTK	8		
08F200Y	8		
08F200YBTHSS	8		
08F200YTK	8		
08F250Y	8		
08F250YK	8		
08F300Y	8		
08G100CBWFDS	9		
08G150CTLDSS	9		
08G162CTWFWS	9		
08G200CKLFPS	9		
08G200WTWFWS	9		
08G250WWK	9		
08L125CBLCTS	8		
08L175YB	8		
08M050CTRFDP			
08M050CTRFSP	11		
08M100CBPDSS	11		
08R250W	10		
08R300W	10		
08S250W003	10		
085250W005			
085250W497 08S250W592	10		
	9		
08T125W 08T150WBWFDS			
	9		
08T200W	9		
08X125CBACTS	11		
08X125CKADDS	11		
08X200CKADDS	11		
09D300S	9		
10G125CBWFDS	9		
10G162CTWFWS	9		
10M075CDK	11		
10M075CSK	11		
10M075CTMFDS	10		
10M075YKFT4X	10		
10M075YLFT4X	10		
10M075YTFFDX	10		
10M100CKMFDS	10		
12G175YKLFAX	9		
12G200YKLFCX	9		
12G250YKLFCX	9		
12M087YKFF4X	10		
12M100YKFF3X	10		

Accessories: Screw System

Item #	Page		
9Z0001N	5		
9Z0011N	5		
9Z0012N	5		
9Z0021N	5		
10X0002N	6		
10X0012N	6		
10X0022N	6		
ADP009	12		
ADP019	12		
EA0297	12		
EA0297N	12		
EA0298	12		
EA0298N	12		

ITEM CODE INDEX

Accessories: Screw System (cont.)

	X			
ltem #	Page			
EA0299	12			
EA0299N	12			
EA0300	12			
EA0301	12			
EA0301N	12			
EA0302	12			
EA0308	12			
EA0314	12			
EA0315	12			
EA0315N	12			
EA0316	12			
EA0316N	12			
EA0396	12			
EA0397	12			
EA0400	12			
EA0401	12			
EA0402	12			
FA0334	13			
FB0155	13			
FB0157	13			
FB0159	13			
FC0822	13			
FC0878	13			
FC0887	13			
FC0895	13			
FC0983	13			
FC1022	13			
FC1023	13			
HA0332	13			
MB0174	12			
MB0183	12			
MB0184	12			
MB0185	12			
MB0186	12			
MB0187	12			

Accessories: Pneumatic

Item #	Page
HA0308	51
HC0788	38, 62
MA0013	51
NPC03	37
PC0051	75
PC0057	75
PC0064	73
PC0065	73
PC0101	76
PC0102	76
PC0103	76
PC0344	76
PC0349	75
PC0350	76
PC0351	76
PC0477	74
PC0478	74
PC0479	74
PC0480	74
PC0489	75
PC0501	74
PC0502	74
PC0503	74
PC0504	74
PC0505	74
PC0506	74
PC0576	74
PC0577	74
PC0629	76
PC0630	76

ITEM CODE INDEX

Accessories: Pneumatic (cont.)

ltem #	Page		
PC0643	75		
PC0656	75		
PC0657	75		
PC0900	74		
PC0977	73		
PC0978	73		
PC0979	73		
PC0983	75		
PC0987	75		
PC1138	75		
PC1152	73		
PC1166	76		
PC1295	76		
PC1319	73		
PC1320	73		
PC1321	73		
PC1322	73		
PC1323	74		
PC1325	74		
PC1328	74		
PC1330	74		
PC1337	73		
PC1338	73		
PC1339	73		
PC1340	73		
PC1341	73		
SWM125B	37		
YB0123	76		
YJ0042	33		
YJ0043	33		
YJ0044	37		
YJ0055	33		

Accessories: No-Mar Pads

Item #	Page
HC0571	77
HC0572	77
HC0625	77
HC0626	77
HC0729	77
HF0028	77
HF0029	77
HF0046	77
HF0064	77
HF0079	77
HF0110	77
HF0113	77

Accessories: Extended Length Magazines

item #	Page		
GA0767	31, 76		
GA0778	31, 76		

Accessories:

Battery & Charger Systems

item #	Page
VB0156	77
VB0189	77
VB0190	77
VB0210	77
VB0212	77

Accessories: No-Mar Pads

Item #	Page
HA0170	77
HA0200	77
HA0201	77
HC0253	77
HC0396	77
HC0401	77
HC0463	77
HC0506	77
HC0507	77
HC0536	77



FRAMING, SHEATHING & SUBFLOORS



ROOFING, SIDING & FENCING

ROOFING	16 GA WIDE CROWN	FELT CAP & STAPLE	20 GA	WIRE WELD	PLASTIC WOUND
HITTPHPPPP					
Pg. 51-52	Pg. 53	Pg. 53	Pg. 53	Pg. 51–52	Pg. 51–52

FLOORING

PALLETS & CRATING



UPHOLSTERY & FURNITURE

22 GA	21 GA	20 GA	17 GA	16 GA
Pg. 63	Pg. 63	Pg. 64	Pg. 65	Pg. 65

DURASPIN® AUTO-FEED SCREW SYSTEMS



HOT DIPPED GALVANIZED

34°	20°	15° COIL
Pg. 39, 40 & 45	Pg. 41-42	Pg. 43, 51, 52, 57, 58

304 STAINLESS STEEL



DURASPIN® AUTO-FEED SCREW SYSTEMS

	DURASPIN [®] AU	U-FEED SURE	NSYSTEMS				
ш	DS225-18V	DS222-18V	DS322-18V	DS245-AC	DS242-AC	DS342-AC	
U	10A0002N	10B0002N	10C0002N	10D0001N	10E0001N	10F0001N	
REFERENC							
	Pg. 3	Pg. 3	Pg. 3	Pg. 4	Pg. 4	Pg. 4	
	DS230-S1		DS230-M1	DS230-D1		DS230-D2	
	9Z0001N		9Z0021N	9Z0011N		9Z0012N	
	Pg. 5		Pg. 5	Pg. 5		Pg. 5	
	DS530 SERIES		DS532-AC		DS534-AC		
	10X0002N 10X00	012N 10X0022N	10X0003N		10X0013N		
		0					
	Pg.	6	Pg	ı. 6		Pg. 6	
	SG2510		SG4100				
	6X0002N		6X0004N				
	Pg. 7		Pg. 7				
	Fasteners: see pages 8 - 11						

FINISH & V	NOODWOF	RKING						
F-18XP	F-16XP	F-15	F-LXP	TN11G1	TN11L1	TN21L1	LS1XP	FinishPro18Mg
10M0001N	10N00001N	10L00001N	10Y00001N	TN11G1	TN11L1	TN21L1	8N0001N	1U0021N
Pg. 15	Pg. 15	Pg. 15	Pg. 15	Pg. 16	Pg. 16	Pg. 17	Pg. 17	Pg. 17
FinishPro18E	3Mg SLP2	OXP Fini	shPro25XP	FinishPro16X	P FinishPro	30XP Fir	nishPro35Mg	FinishPro42XP
9B0001N	4301	01N	760102N	9S0001N	9P000	2N	6G0001N	4G0001N
Pg. 17	Pg.	18	Pg. 18	Pg. 18	Pg. 19	9	Pg. 19	Pg. 19
SLS20XP	SLS2	:5XP	SKSXP	SLS150Mg	SLS18	Mg	SC1XP	SC2
SEE SPECIFICATI	IONS SEE SPECIF	ICATIONS SEE S	PECIFICATIONS	8C0001N	1W002	21N	220101N	470001N
Pg. 20	Pg.	20	Pg. 20	Pg. 21	Pg. 2	1	Pg. 22	Pg. 22

Fasteners: see pages 23-29

FRAMING, SHEATHING & SUBFLOORS

F-35XP	F-35FRHXP	FN91T	FN81T1	FramePro325XP	FramePro701XP	FramePro751XP	FramePro325FRHXP	FramePro702XP
10G0002N	10H0002N	FN91T	FN81T1	4Z0101N	2H0133N	2J0103N	4H0101N	#2K0103N
					CHARTER OF CONTRACTOR			
Pg. 31	Pg. 31	Pg. 32	Pg. 32	Pg. 33	Pg. 33	Pg. 33	Pg. 34	Pg. 34
FramePro752X	P SCN60XP	SCN65XP	Mini Hand Nailer	A20 Hand Nailer	JN91H1	JN91H2	JN91P1	JN91P2
2F0103N	520101N	540101N/540104N	PC1195	PC0781	JN91H1	JN91H2	JN91P1	#JN91P2
							T	BER
Pg. 34	Pg. 35	Pg. 35	Pg. 35	Pg. 35	Pg. 36	Pg. 36	Pg. 36	Pg. 36
Fasteners: see pages 39-45								
SCP40X	P PS	15XP	PS20XP	NS20XP	NS20	BXP	SNS41	SQS55XP

36F40AF	Falake	FJZUAF	NJEUAF	NJZUDAF	JN341	JUJJJVL
7J0001N	9T0001N	9W0001N	9X0001N	9Y0001N	3L0003N	660101N
Pg. 37	Pg. 37	Pg. 37	Pg. 38	Pg. 38	Pg. 38	Pg. 38

Fasteners: see pages 45-47

ROOFING, SIDING & FENCING

RoofPro445XP	SN71P1	PS15RXP	BC58 Cap	A11 Hammer Stapler
8V0001N	SN71P1	9U0001N	4A0001N	PC0700
	Ellipse and the second s			
Pg. 49	Pg. 49	Pg. 50	Pg. 50	Pg. 50

Fasteners: see pages 51-53

PALLETS & CRATING



Fasteners: see pages 57-59

UPHOLSTERY & FURNITURE



Fasteners: see pages 63-65

FLOORING



Fasteners: see page 68

AIR COMPRESSORS & KIT

PC1131	PC0968	PC1280	PC1010	PC1010N	PC0947
Pg. 71	Pg. 71				

THE NEW STANDARD





ERGONOMIC DESIGN Superb balance for all-day use

POWERFUL Consistently drives a full range of nails

IN-LINE MAGAZINE

Provides clear line of sight for right and left handed operators, improves balance and reduces fatigue



AGGRESSIVE TOENAIL SAFETY Provides extra grip for toenail applications, no-mar tip included

TOOL-FREE DEPTH OF DRIVE

Quickly and easily set the drive depth

DRY FIRE LOCKOUT

Reduces tool wear and indicates the need to reload fasteners





KYOCERA SENCO Industrial Tools, Inc.

Looking for more?



Contact Us 8450 Broadwell Road Cincinnati, Ohio 45244

Phone: 800.543.4596 Fax: 800.543.3299



Visit Us On the web for more information SENCO.com



Find Us Search for your closest SENCO dealer SENCO.com/dealer-locator/



Watch Us Check out all of our latest videos & product launches Youtube.com/SencoBrands



Follow Us instagram.com/SencoBrands facebook.com/SencoBrands twitter.com/Senco



MAKING HARD WORK EASIER

Item #MK336 ©2023 KYOCERA SENCO Industrial Tools, Inc.